Sirius

EDITION
2024/2025

WELCOME
TO FIRST CLASS

Sirius S.p.a., established in 1996, operates in the market sector of residential air ventilation and purification, in particular it produces cooker hoods for residential kitchens.
Quality, innovation, professional competence, technology and design are rolled into one with a clear and dynamic commercial policy that has permitted a rapid growth of the company, ensuring market penetration throughout the world.

Sirius has, in a short time, become a world leader in the sector of high quality decorative cooker hoods, encompassing a wide product range and exporting 90% of its production.
The strategic choices accomplished in the technical productivity sectors, dictated by many years of experience, have been of fundamental importance for the growth and success of the company.

A wide range of products, different technological possibilities and innovation, functionality of the components used, such as the motors, and different ventilation components represent a combination between design and functionality.
This gives the clients a wide choice, to meet all of their ventilation needs. Our company's philosophy, innovative in the market of residential kitchen ventilation, aims to mantain and improve the high quality standards of our production in style, technology and design, wich are synthesized by the realization of modular and innovative ventilation systems.

Sirius





DESIGN & TECHNOLOGY



MANAGE YOUR RANGE HOOD WITH YOUR SMARTPHONE THROUGH SIRIUS APP

Interact and control your range hood, in a fast and efficient manner, even remotely.
Our new technology replaces and widens the functionalities of traditional controls.
Easy and intuitive to use, it allows adjusting lighting and suction power and, in some specific models, it can even monitor and detect air quality.
Sirius App sets up automatically according to the technical and functional specifications of the purchased model.
Its technology alerts the user if a maintenance action is required (e.g. replacement of filters).



MANAGE YOUR RANGE HOOD THROUGH THE VOCAL ASSISTANTS GOOGLE HOME OR ALEXA


Turn your range hood on and select the suction speed, then think only about the pleasure of cooking. Manage the lighting, choose the color temperature you prefer, from hot to cold light, increase or reduce its intensity.

Google HOME

amazon alexa

LIGHTING

The latest generation LEDs in our range hoods allow to manage light intensity by increasing or decreasing its power and choose colour temperature from warm to cold light (from 2700°K to 6500°K), thus adapting hood lighting to the light of your domestic environment.
The lighting surface in our lighting system is perfectly homogeneous since there are no overshadows.

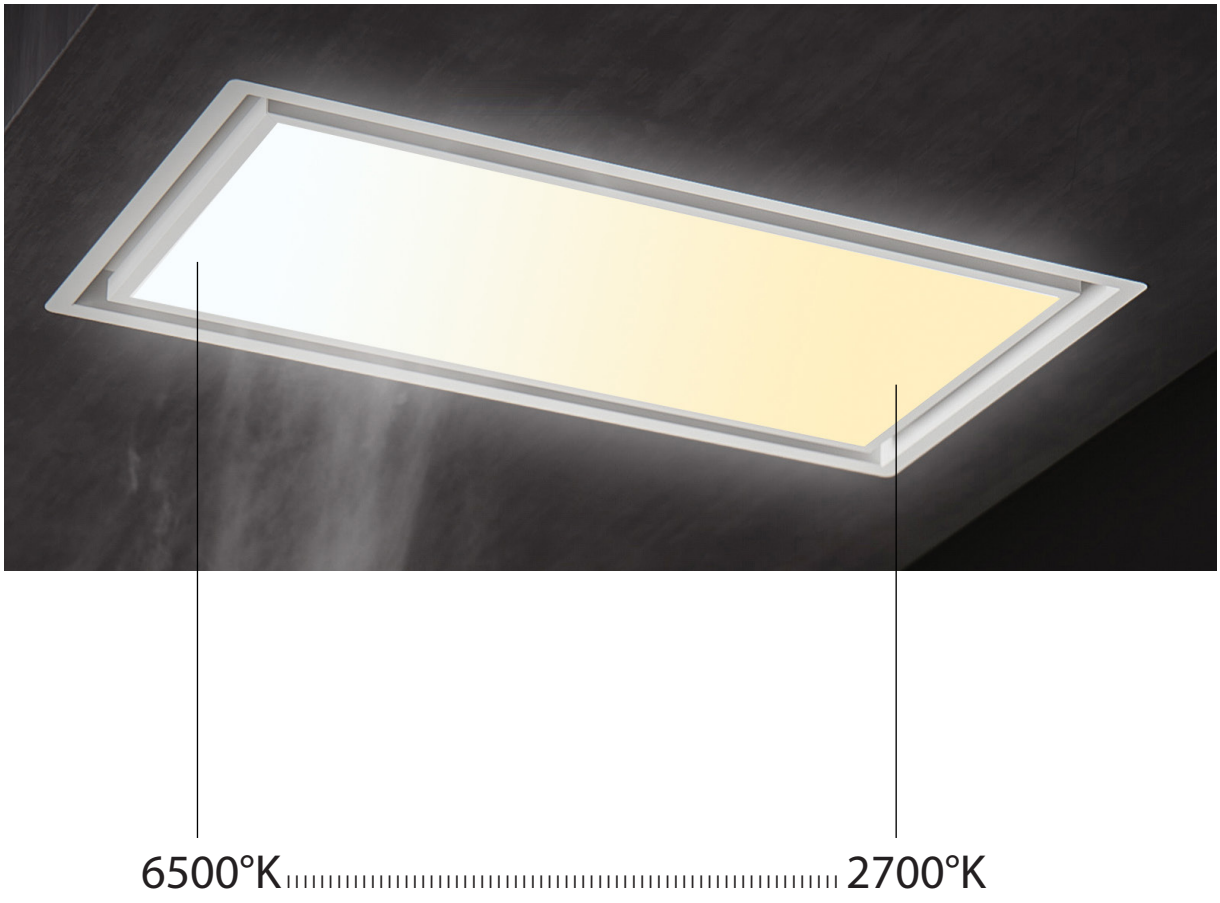

BRUSHLESS motors

High suction efficiency
Using a brushless motor allows to lower the consumption (kw/h) by 85% when the appliance is used in the low – medium speeds and by 35% in high speeds.

Quietness
This is the quietest motor in the market and its performances remain stable in any given use condition, even with complicated installations.

Longer life of the product



ENERGY SAVING

HIGH EFFICIENCY carbon filter

High efficiency carbon filters allow a higher filtering efficiency compared to standard carbon grain filters. These filters are made of a mold of foam in polyurethane, having activated carbon spheres in it and allowing high permeability of the air compared to normal carbon grain filters. At the same time, they allows the highest absorption of smells thanks to their top quality activated carbon.
The advantages of using a high efficiency carbon filter, instead of a typical carbon filter, are:

Higher filtering efficiency
Smaller losses during air filtration


Long lasting
To restore / regenerate high efficiency and washable filters it is necessary to wash them in the dishwasher and then put them for 1 hour into the oven at max 90°C.

EFFICIENCY is measured by the absorption capacity of the filter related to its weight. If the filter weight is 100g, an efficiency of 98.8 means that it can absorb 98.8g of greases.

LIFESPAN we took into account a standard use of 1 hour/day at medium speed level.

ARTIFICIAL INTELLIGENCE SYSTEM - AIS

This innovative system, patented by Sirius, is made up of sensors and technologically advanced electronic devices working in synergy.
As you start cooking, the range hood autonomously activates and adjusts the suction power, by detecting constantly both the temperature and air quality while cooking.
This innovative technology allows an autonomous and automatic operation of products and is completely independent from the kind of hob you use (gas, induction, etc.).

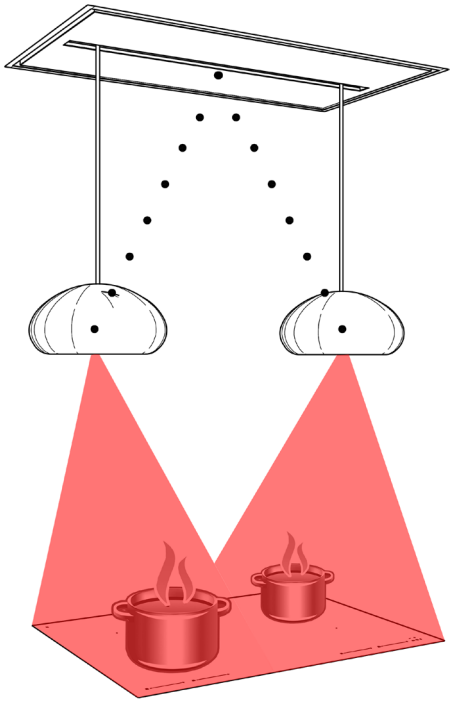

BI-POWER TECHNOLOGY

Sirius bi-power technology allows to get a high energy saving and a higher product efficiency, especially in range hoods in filtering version or range hoods installed in ducting version with ducts having diameters less than 150 mm.
The range hood is equipped with a 800 m3/h fan. Through this innovative technology and touch control, you can set the parameters of power capacity (m3/h), absorption (W) and noise level (dBA).
This means an improvement in terms of efficiency thanks to an airflow suitable for the application (filtering or ducts having diameters less than 150 mm), an energy saving of about 35% and a noise level reduction of about 12%.



ENERGY CONSUMPTION 35 %




NOISE LEVEL REDUCTION -12 %

ANTI-DROP SYSTEM



This is an innovative anti-condensation system, based on thermal resistances inside the glass panels or the stainless steel panels. By heating the surface in contact with the vapours coming from the induction hob, this system does not allow condensation or water drops to develop and fall on the hob.

Sirius range hood is equipped with an **air purification system** inside the upper chimney.
This system is made up of an air quality sensor, 2 ionizers and a valve activated by a micromotor, allowing to exhaust fumes outside (ducting version) or towards charcoal filters and side ionizers (filtering version).

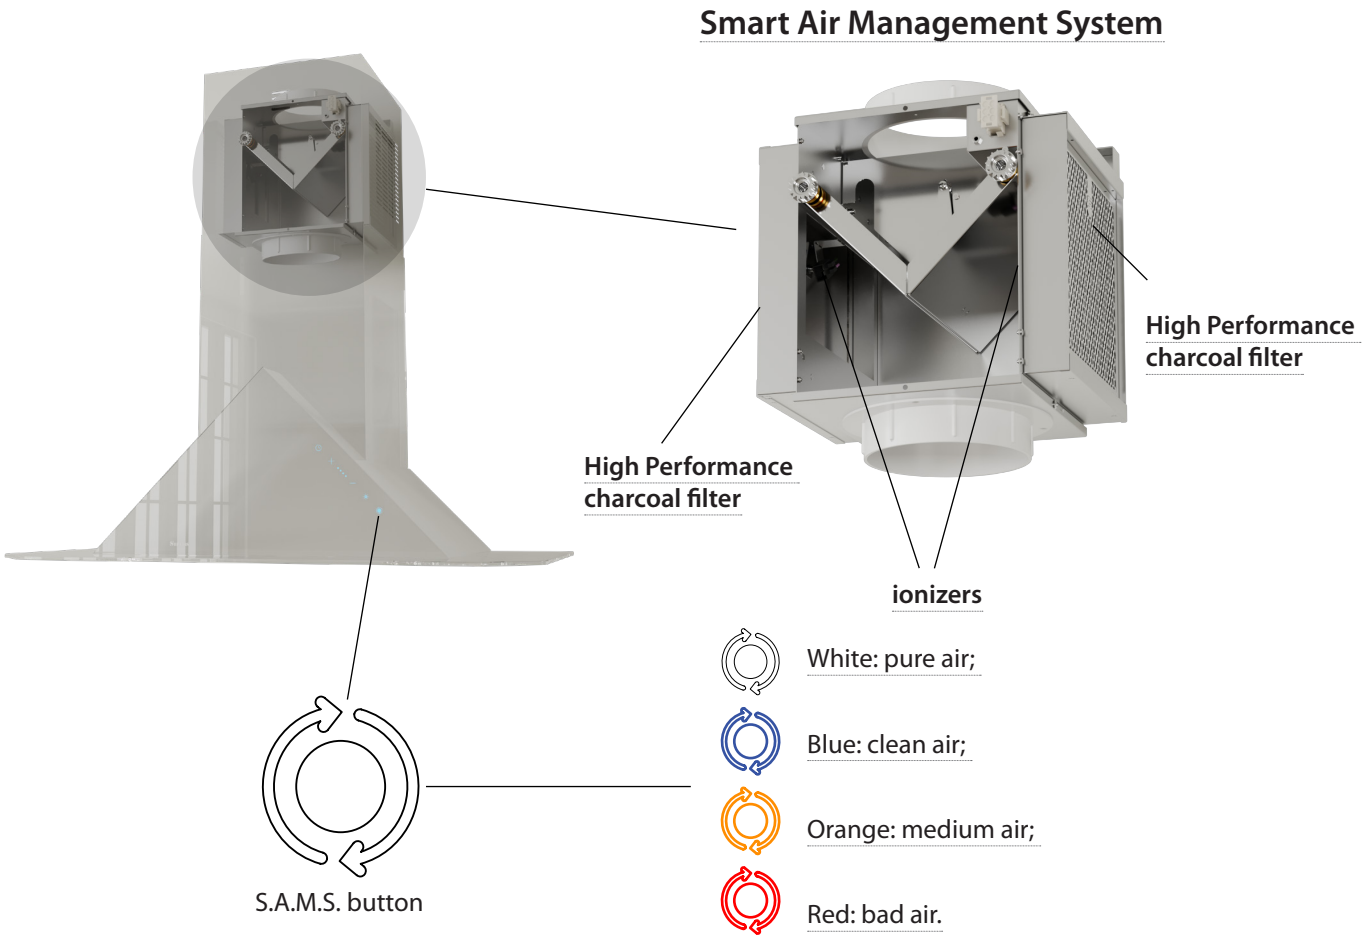

This range hood is equipped with a new Touch control having a S.A.M.S. button, indicating always the air quality through the color variation:

White: clean air; Blue: good air; Orange: medium air; Red: bad air.

By pressing the button "S.A.M.S.", you can change the version of the hood from ducting (open valve and air exhausted outside) to filtering and purifying (closed valve; fumes go out through the side grills of the chimney; the air returns to the kitchen once filtered and purified thanks to high efficiency charcoal filters and ionizers).

The **Smart Air Management System** is usually set in ducting version (Fig.1). The valve is open and fumes go outside through a ducting system.
After installation, the product works as a standard range hood, with a white colour rear-lighted touch control.

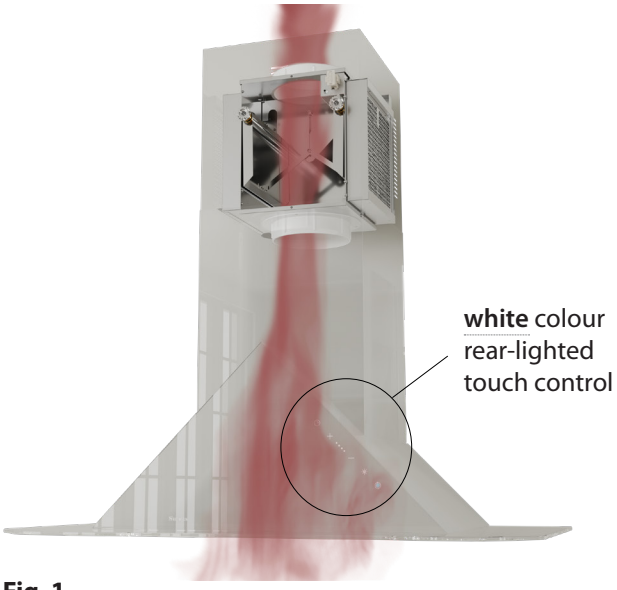


Fig. 1

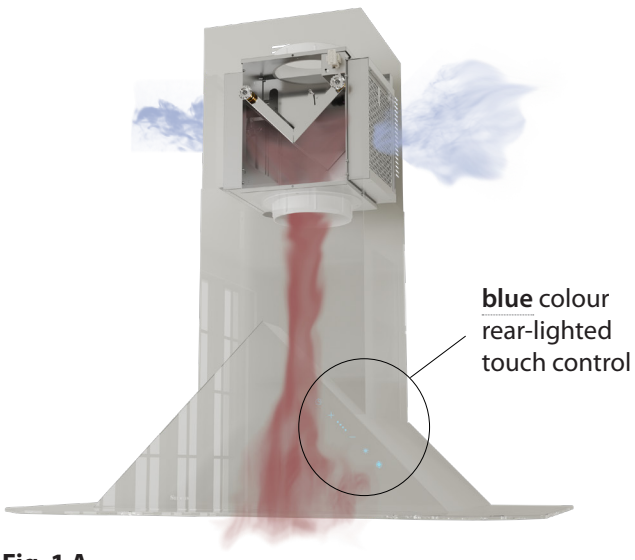


Fig. 1 A

After or while cooking, if the button (S.A.M.S) highlights a bad air quality, you can activate the Smart Air Management system by pressing this button (Fig.1A).
The backlight of the touch control changes from white to blue colour.
The valve closes, the ionizers start functioning and the air returns to the kitchen through the chimney side grills.

The process of filtration and air purification takes place through 2 High Performance charcoal filters and 2 ionizers.
You can keep on using all the product functions as usual (change in speed, lights, etc).
You can activate this new system even when the product is switched off, in case of bad quality air.

By pressing the button "S.A.M.S.", the range hood sets in filtering mode with motor at 1st speed.
You can permanently set the Smart Air Management function during installation.
You just have to hold down the button "S.A.M.S" for at least 3 seconds in order to set the product in ducting or filtering version.





THE PASSION OF CONCEIVING AND FINDING INNOVATIVE DESIGN SOLUTIONS

The aesthetics of the products and the corporate image are entrusted with the architect Giacomo Fava, who explains Sirius philosophy this way:
"Our mission is to imagine products that connect with the end user on an emotional and functional level. The creative approach entails a deep analysis of materials, technologies and human behaviors, with the aim to create objects that are simple, beautiful, clear, easy to use and long - lasting: objects with which you can fall in love.
At the core of every single project there is a long work, that sees the tight cooperation and synergy between the company and all the entities involved in the production process, to create a good product which is introduced in the market at the right moment".

INDEX

CERAMIC HANDMADE


GEORGIE / **P. 23**


ICON / **P. 25**


DUNE / **P. 26**


DERUTA / **P. 28**


HIVE / **P. 30**


LINK / **P. 32**


DOWNDRAFT



STONE / **P. 36**


BALANCE / **P. 38**


SUNRISE / **P. 40**


MIDDLE / **P. 42**

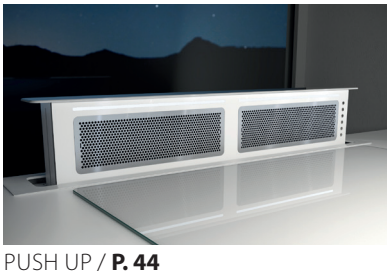
PUSH UP / **P. 44**

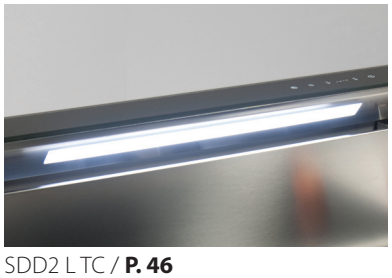
SDD2 L TC / **P. 46**


SDD2 L / **P. 48**

INSTALLATION SCHEMES DOWNDRAFT

P. 50

CEILING HOODS



INSIDE OUT / **P. 61**



SUPERNOVA / **P. 62**
SUPERNOVA AUTOMATIC **P. 65**



SUPERNOVA LAMP / **P. 67**



KITE LIGHT / **P. 70**




KITE / **P.73**



LINE / **P. 74**



HALO LIGHT / **P. 79**

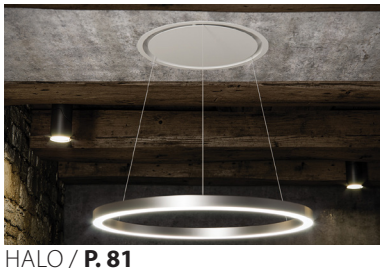

HALO / **P. 81**




SCREEN / **P. 83**




FRAME / **P. 84**



LESS / **P. 86**

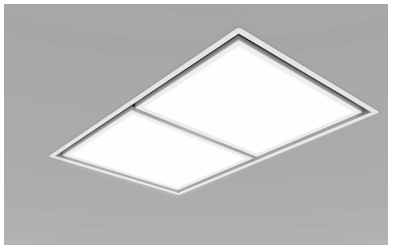

ZENDRA / **P. 88**

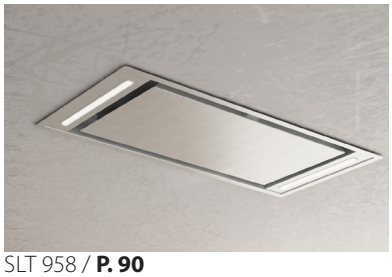

SLT 958 / **P. 90**



S-DF4 FILTERING KIT / **P. 92**

INDEX

DECORATIVE ISLAND



NEMESI / **P. 97**



SYMPHONY / **P. 101**



MELODY / **P. 103**



ROLL / **P. 106**



SIL 24 TC / **P. 108**



SIL 24 / **P. 109**



MO 407 / **P. 110**



MO 408 / **P. 111**

WALL HOODS



ARROW / **P. 115**



FLAT / **P. 116**



FLAT ANTIDROP / **P. 118**



SLTC 119 / **P. 120**



SKINNY / **P. 122**



JEEG / **P. 124**



SL TC 122 / **P. 126**



SL TC 92 / **P. 128**



SL 92 / **P. 129**



SL 107 / **P.130**



SL TC 107 / **P.131**



SL 90 TC / **P.132**



SL 91 TC / **P.133**



SL109 / **P. 134**



MO 209 / **P. 135**



MO 210 / **P. 136**

INDEX

BUILT-IN PRODUCTS



SUPERHERO / **P. 140**



WING / **P. 142**



SL 906 L / **P. 144**



SL 909 / **P. 145**



SLTC 928 / **P. 146**



SL 927 ANTIDROP / **P.148**



SM 927 / **P.149**



SL 913 / **P.150**



SL 903 P / **P. 151**



SM 923-L / **P.152**




SM-SL 900 / **P. 153**



SL 907 / **P. 154**

VENTED INDUCTION HOBS

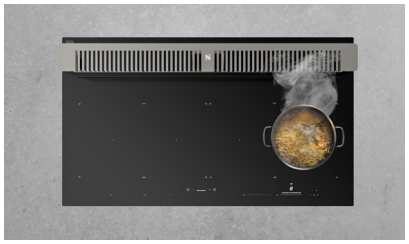

DNA / **P. 158**



SYNTHESIS 78 CM / **P. 161**



SYNTHESIS 60 CM / **P. 163**



SENSE / **P. 164**



SHADOW / **P. 166**



SDDH1 / **P. 168**

INSTALLATION
SCHEMES
VENTED INDUCTION HOB **P. 170**



AEOLUS/ **P. 177**

REMOTE MOTORS / **P. 174**

INDUCTION HOBS / **P. 180**

ACCESSORIES / **P.186**

ENERGY DATA LABEL / **P. 187**





CERAMIC HANDMADE

Handmade in Deruta is a collection of cooker hoods designed by Giacomo Fava and realized in cooperation with the master craftsmen of Deruta. Every single piece is entirely handcrafted from ceramic masters of the Umbrian town, renowned in the whole world for exquisite ceramic handcrafting. Unique creations stem from the simple mixture of water and clay, modeled by the hands of the craftsman – artist.
Processing times are slow and require many delicate steps in order to perfect the finish product by hand.





Motor on board

Lighting:

2X3,75W Dimmable and dynamic Led bar (2700 to 6500°K)

Control panel:

Chromed 4 speeds push-button+light switch+timer

Grease filter:

Black painted Anodized aluminum (5+1 layers)

Washable carbon filter KF61

Material:

Black matt painted stainless steel

Handmade glazed ceramic

Finishing:

White

Beige

Green

Antique pink

Filtering version only

GEORGIE SL 123








ICON SILT 35


Motor on board:
600 m3/h
230W
63dBA
Lighting:
Dimmable and dynamic round Led 6W
(2700 to 6500°K)
Control panel:
Remote control
Filter:
Stainless Steel and anodized aluminum
Washable carbon filter KF31
Material:
Handmade ceramic
Finishing:
White/Black matt

Filtering version only

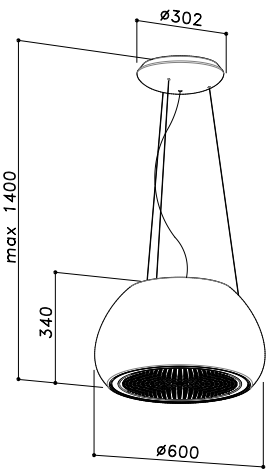

DUNE SL116



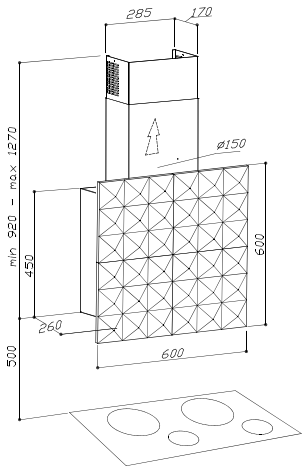


Motor on board:
Top or back vented
Lighting:
3,75W Dimmable and dynamic Led bar (2700 to 6500°K)
Control panel:
Chromed 4 speeds push-button+light switch+timer
Filter:
Anodized aluminum (5+1 layers)
Material:
Stainless Steel, handmade ceramic
Finishing:
Matt black or matt white painted front panel

product	dim.	motor	model identifier	EEC
SL116	600	on-board	P116060PB1364022	A



DERUTA SILT 26



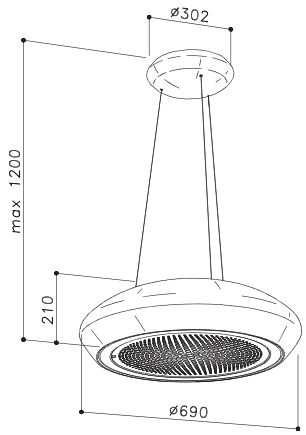


Motor on board:
550 m3/h
110W
68dBA
Lighting:
Dimmable and dynamic round Led 7,5W
(2700 to 6500°K)
Control panel:
Remote control
Filter:
Stainless Steel and anodized aluminum
Washable carbon filter KF38
Material:
Handmade ceramic
Finishing:
Gold/Copper/White
Only filtering version



HIVE SILT 27



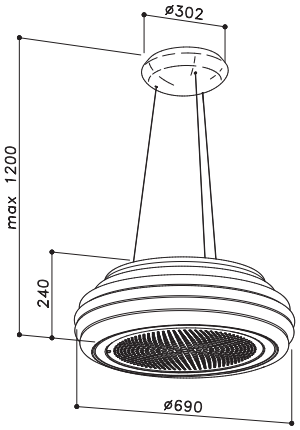


Motor on board:
550 m3/h
110 W
68 dBA
Lighting:
Dimmable and dynamic round Led 7,5W
(2700 to 6500°K)
Control panel:
Remote control
Grease filter:
Stainless Steel and anodized aluminum
Washable carbon filter KF38
Material:
Handmade ceramic
Finishing:
Copper/White

Filtering version only



LINK SLT 106



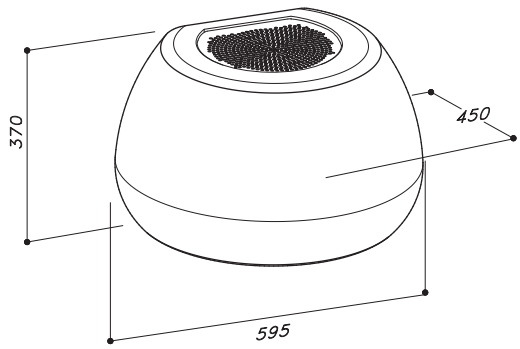

Motor on board:
600 m3/h
230W
65dBA
Lighting:
3,75W Dimmable and dynamic Led bar (2700 to 6500°K)
Control panel:
Remote control
Grease filter:
Stainless Steel and anodized aluminum
Washable carbon filter KF40
Material:
Handmade ceramic
Finishing:
Gold/Copper/Matt Black/White

Filtering version only







DOWNDRAFT

Downdraft rangehoods that offer maximum extraction efficiency with the advantage of a mobile solution that hides the appliance inside the kitchen worktop once use is finished. Sirius, pioneer in the Downdraft sector since 2005, offers a wide range of them, studying different shape, color and technology models, such as to be able to meet different design and functioning needs.

STONE


Motor:
available with motor on board or external motor (to be purchased separately)
Lighting:
1x5W Led strip (835mm version)
1x9W Led strip (1135mm version)
Control:
Touch control 4 speeds+timer+light
Remote control
Filter:
Anodized aluminum (4+1 layers)
Material:
Stainless steel AISI304

Cut out:
Create a niche in the countertop using the following dimensions
100x837mm (835mm version)
100x1137mm (1135mm version)


Anti-crushing safety system

Stone allows to customise the cover with the same material of the worktop, thus obtaining a flush top effect

product	dim.	motor	model identifier	EEC
STONE	835	on-board	D002088PB1282415	A
STONE EM	835	SEM1	D002088PB1292415	B
STONE EM	835	SEM2	D002088PB1152415	C
STONE EM	835	SEM8	D002088PB1172415	C
STONE EM	835	SEM10	D002088PB1302415	C
STONE EM	835	SEM12	D002088PB1312415	A
STONE	1135	on-board	D002118PB1282717	A
STONE EM	1135	SEM1	D002118PB1292717	A
STONE EM	1135	SEM2	D002118PB1152717	C
STONE EM	1135	SEM8	D002118PB1172717	B
STONE EM	1135	SEM10	D002118PB1302717	C

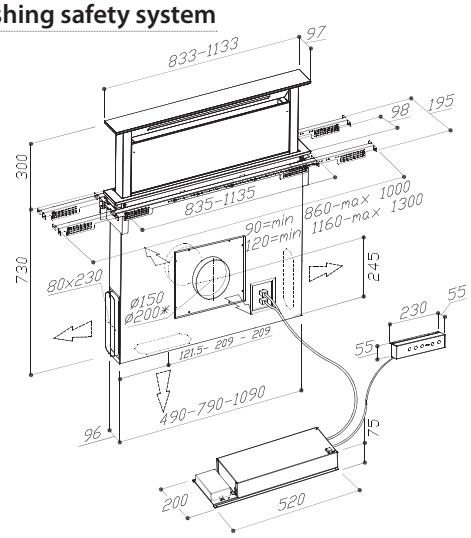

external motor

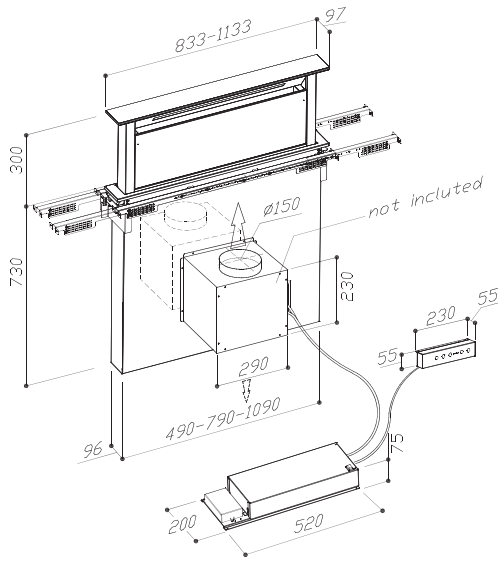

motor on board






BALANCE S DD 18




Motor:
available with motor on board or external motor (to be purchased separately)
Lighting:
Led strip 5W
Control panel:
Touch control 4 speeds+light switch+timer
Filter:
Aluminum anodized (5+1 layers) with integrated oil collector
Material:
Polished stainless steel and glass
Finishing:
Black
White

Anti-crushing safety system

Cut out:
Create a niche in the countertop using the following dimensions:
108x826 mm

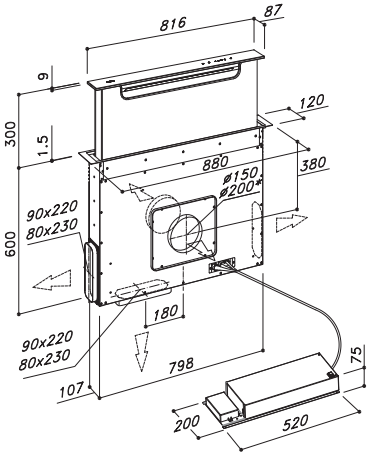

external motor

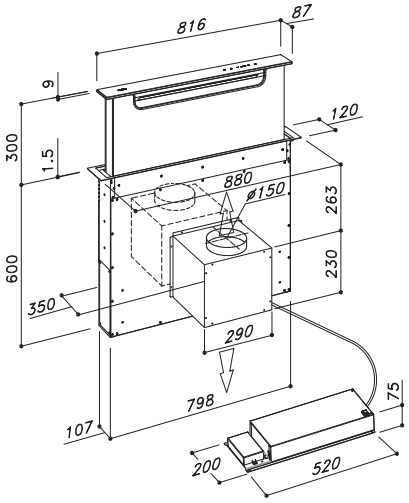

motor on board



filter with oil collector

	product	dim.	motor	model identifier	EEC
	S-DD18	880	on-board	D018088TC1282472	A
	S-DD18 EM	880	SEM1	D018088TC1292472	A
	S-DD18 EM	880	SEM2	D018088TC1152472	C
	S-DD18 EM	880	SEM8	D018088TC1172472	B
	S-DD18 EM	880	SEM10	D018088TC1302472	B
BRH	S-DD18 EM	880	SEM12	D018088TC1312472	A




SUNRISE S DD 13


Motor:
available with motor on board or external motor (to be purchased separately)
Lighting:
led strip 9,5W
Control panel:
Remote control 4 speeds+light switch+timer
Filter:
Polished stainless steel and anodized aluminum filter
Material:
Stainless Steel/Aluminum/Glass
Finishing:
Black

Cut out:
Create a niche in the countertop using the following dimensions:
115x850mm

Anti-crushing safety system

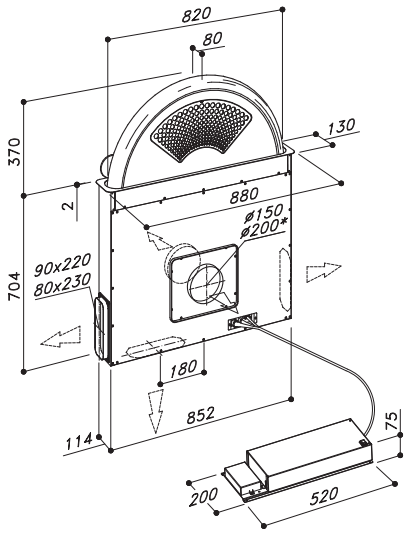

external motor

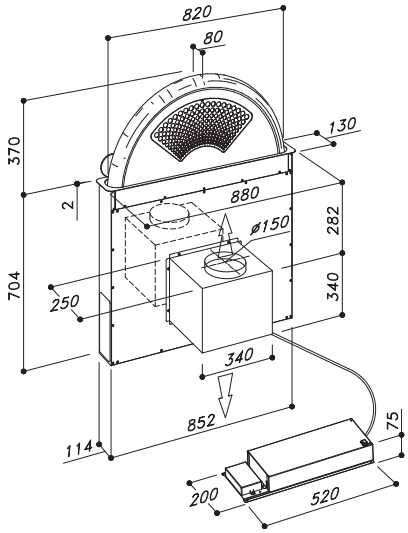

motor on board

product	dim.	motor	model identifier	EEC
S-DD13	880	on-board	D013088TC1283163	A
S-DD13 EM	880	SEM1	D013088TC1293163	A
S-DD13 EM	880	SEM2	D013088TC1153163	B
S-DD13 EM	880	SEM8	D013088TC1173163	C
S-DD13 EM	880	SEM10	D013088TC1303163	C



MIDDLE S DD 20





Thickness perfect to match domino hobs (4mm for glass, 1mm for inox)

Motor:
Motor on board (Brushless)
Control panel:
Touch control 4 speeds+timer
Filter:
Anodized aluminum
Material:
Stainless steel and glass
Finishing:
Black ceramic glass frame and black ceramic glass panel
Stainless steel frame and stainless steel panel

Cut out:
RECTANGULAR OPENING: 490mm x (according to the sizes of the hobs)

Anti-crushing safety system

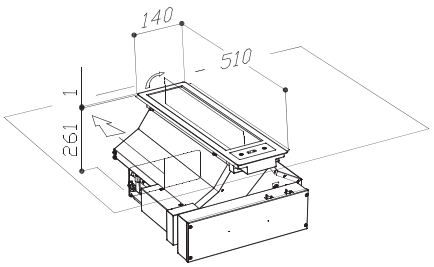



product	motor	model identifier	EEC
S-DD20 INOX BRHM	on board	D020052TC135XX74	A++
S-DD20 GLASS BRHM	on board	D020052TC135XX74	A++




PUSH UP S DD 11




Motor:
available with motor on board or external motor (to be purchased separately)
Lighting:
2x3,9W Strip Led
Control:
4 speeds push-button+light switch+timer
Filter:
Polished stainless steel and anodized aluminum
Material:
Stainless Steel and glass
Finishing:
Black
White

Cut out:
Create a niche using the following dimensions:
100x790 mm

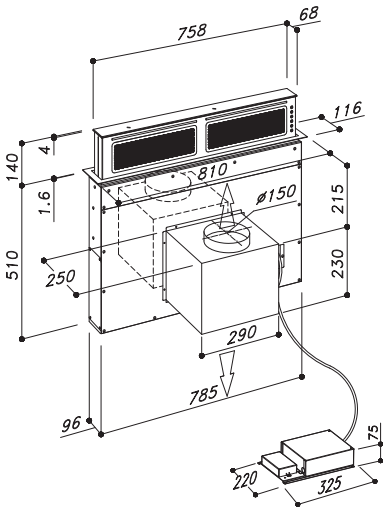

motor on board

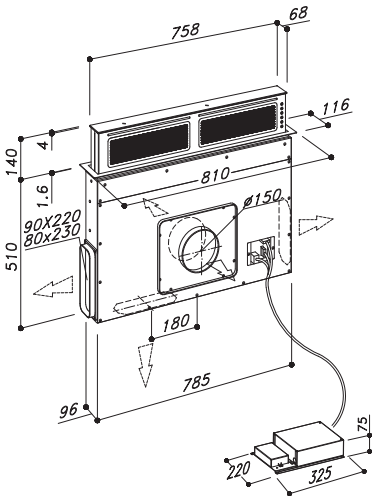

external motor

	product	dim.	motor	model identifier	EEC
	S-DD11 X	810	on-board	D011088PB1282219	B
	S-DD11 EM X	810	SEM1	D011088PB1292219	B
	S-DD11 EM X	810	SEM2	D011088PB1152219	C
	S-DD11 EM X	810	SEM10	D011088PB1302219	C
BRH	S-DD11 EM X	810	SEM12	D011088PB1312219	C




S DD 2 L TC




Motor:
available with motor on board or external motor (to be purchased separately)
Lighting:
1x6,5W Led strip (S-DD2-L 575mm version)
1x5W Led strip (S-DD2-L 875mm version)
1x9W Led strip (S-DD2-L 1175mm version)
Control panel:
Touch control 4 speeds+light switch+timer
Grease filter:
Anodized aluminum (4+1 layers)
Material:
Stainless steel AISI304 and glass

Cut out:
Create a niche in the countertop using the following dimensions
100x542 mm (S-DD2-L 575mm)
100x842 mm (S-DD2-L 875mm)
100x1142 mm (S-DD2-L 1175mm)


Anti-crushing safety system

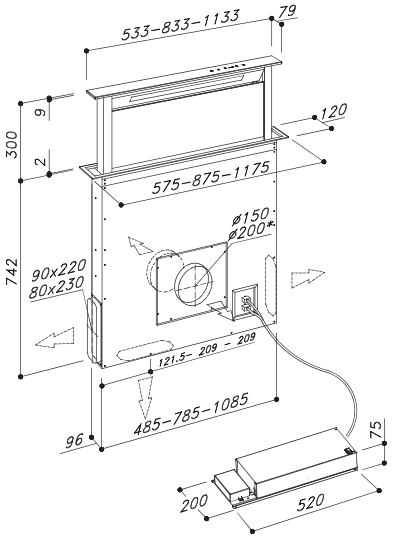

external motor

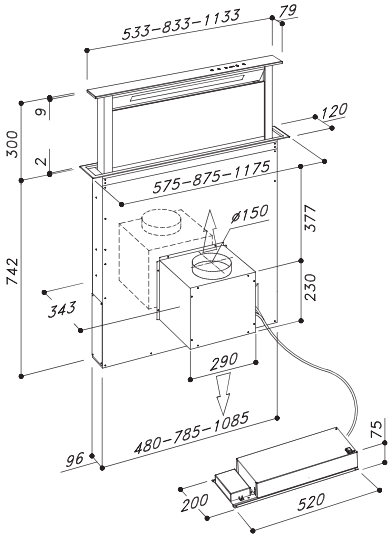

motor on board

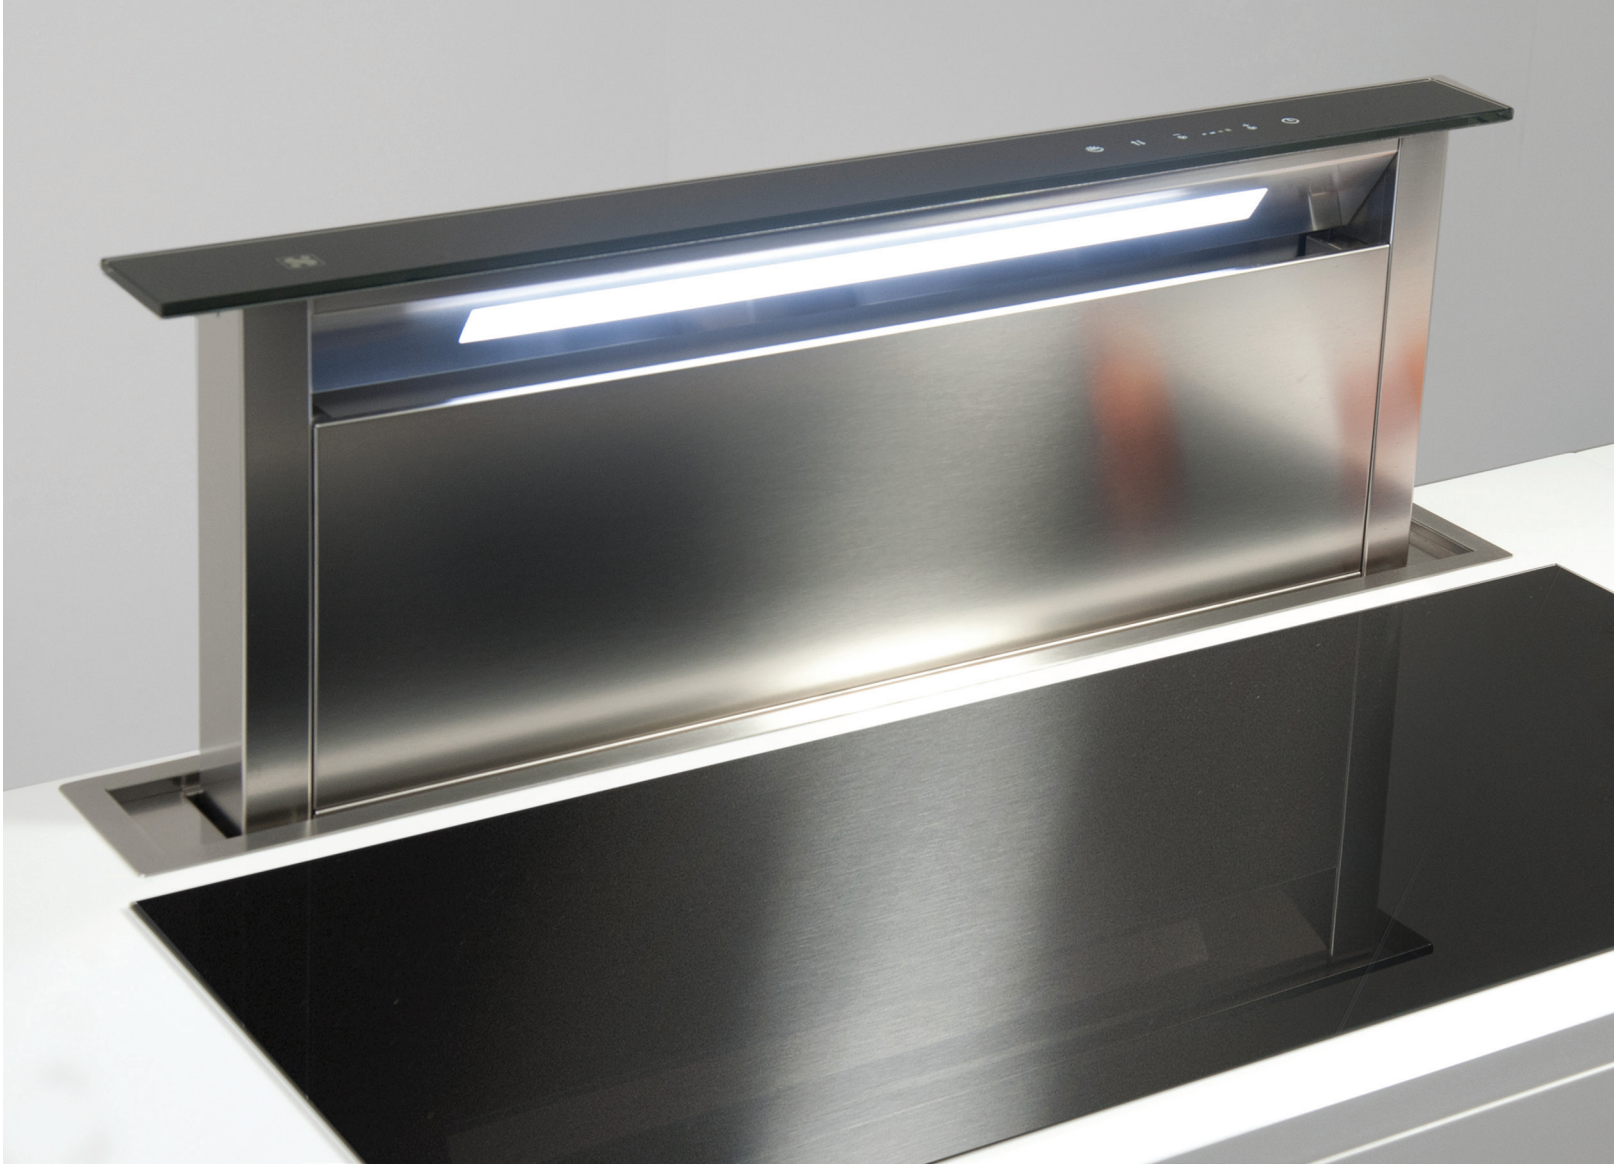

product	dim.	motor	model identifier	EEC
SDD2 - L EM 580 TC (LED)	575	on-board	D002058TC1280116	B
SDD2 - L EM 580 TC (LED)	575	SEM1	D002058TC1290116	B
SDD2 - L EM 580 TC (LED)	575	SEM2	D002058TC1150116	C
SDD2 - L EM 580 TC (LED	575	SEM8	D002058TC1170116	C
SDD2 - L EM 580 TC (LED	575	SEM10	D002058TC1300116	C
SDD2 -L 880 (LED) TC)	875	on-board	D002088TC1282415	A
SDD2-EM-L 880 (LED) TC	875	SEM1	D002088TC1292415	B
SDD2-EM-L 880 (LED) TC	875	SEM2	D002088TC1152415	C
SDD2-EM-L 880 (LED) TC	875	SEM7 Ø150	D002088TC1162415	A+
SDD2-EM-L 880 (LED) TC	875	SEM7 Ø200	D002088TC1162415	A+
SSDD2-EM-L 880 (LED) TC	875	SEM8	D002088TC1172415	C
SDD2-EM-L 880 (LED) TC	875	SEM10	D002088TC1302415	C
SDD2-EM-L 880 (LED) TC	875	SEM12	D002088TC1312415	A
SDD2-L EM 1200 (LED) TC	1175	on-board	D002118TC1282717	A
SDD2-L EM 1200 (LED) TC	1175	SEM1	D002118TC1292717	A
SDD2-L EM 1200 (LED) TC	1175	SEM2	D002118TC1152717	C
SDD2-L EM 1200 (LED) TC	1175	SEM8	D002118TC1172717	B
SDD2-L EM 1200 (LED) TC	1175	SEM10	D002118TC1302717	C


S DD 2 L / INOX




Motor:
available with motor on board or external motor (to be purchased separately)
Lighting:
1x6,5W Led strip (S-DD2-L 575mm version)
1x5W Led strip (S-DD2-L 875mm version)
1x9W Led strip (S-DD2-L 1175mm version)
Control panel:
Touch control 4 speeds + light switch + timer
Grease filter:
Anodized aluminum (4+1 layers)
Material:
Stainless steel AISI304

Anti-crushing safety system

Cut out:
Create a niche in the countertop using the following dimensions
100x542 mm (S-DD2L 575 mm)
100x842 mm (S-DD2L 875 mm)
100x1142 mm (S-DD2L 1175 mm)

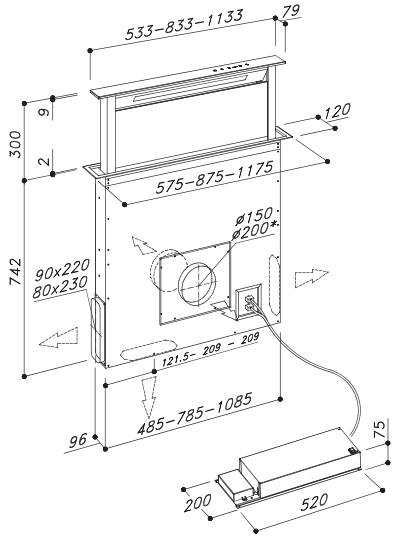

external motor

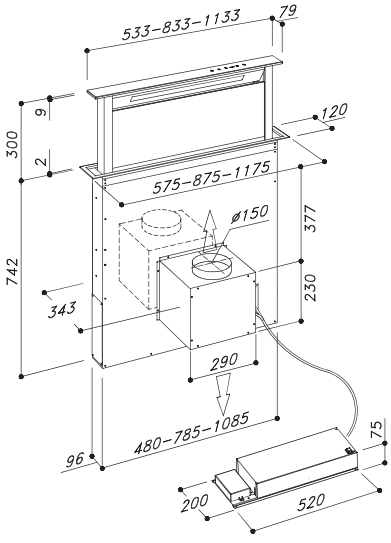


motor on board





product	dim.	motor	model identifier	EEC
SDD2 - L 580 X (LED)	575	on-board	D002058PB1280116	B
SDD2 - L EM 580 X (LED)	575	SEM1	D002058PB1290116	B
SDD2 - L EM 580 X (LED)	575	SEM2	D002058PB1150116	C
SDD2 - L EM 580 X (LED)	575	SEM8	D002058PB1170116	C
SDD2 - L EM 580 X (LED)	575	SEM10	D002058PB1300116	C
SDD2 -L 880 (LED) X	875	on-board	D002088PB1282415	A
SDD2-EM-L 880 (LED) X	875	SEM1	D002088PB1292415	B
SDD2-EM-L 880 (LED) X	875	SEM2	D002088PB1152415	C
SDD2-EM-L 880 (LED) X	875	SEM7 Ø150	D002088PB1162415	A+
SDD2-EM-L 880 (LED) X	875	SEM7 Ø200	D002088PB1162415	A+
SDD2-EM-L 880 (LED) X	875	SEM8	D002088PB1172415	C
SDD2-EM-L 880 (LED) X	875	SEM10	D002088PB1302415	C
SDD2-EM-L 880 (LED) X	875	SEM12	D002088PB1312415	A
SDD2-L 1200 (LED) X	1175	on-board	D002118PB1282717	A
SDD2-L EM 1200 (LED) X	1175	SEM1	D002118PB1292717	A
SDD2-L EM 1200 (LED) X	1175	SEM2	D002118PB1152717	C
SDD2-L EM 1200 (LED) X	1175	SEM8	D002118PB1172717	B
SDD2-L EM 1200 (LED) X	1175	SEM10	D002118PB1302717	C


INSTALLATION SCHEMES

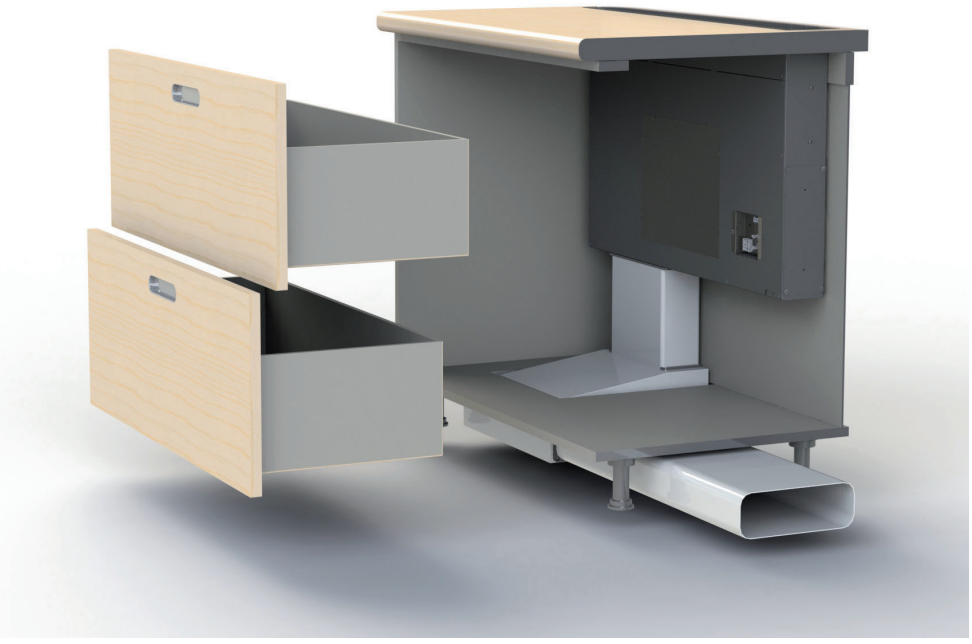


S-DD2 L STONE WITH SEM10
S-DD2 L STONE WITH SEM12

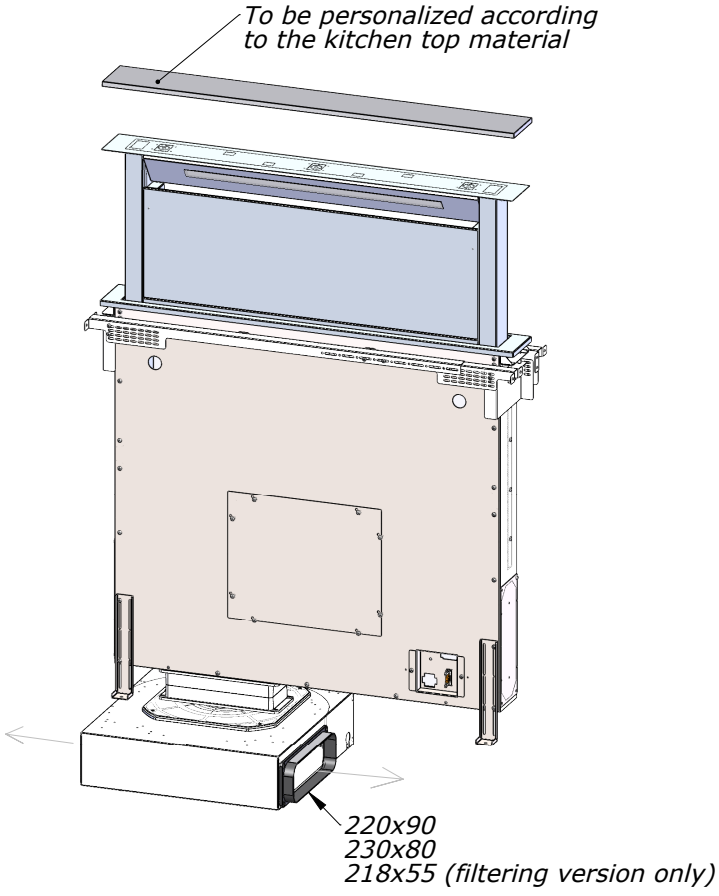


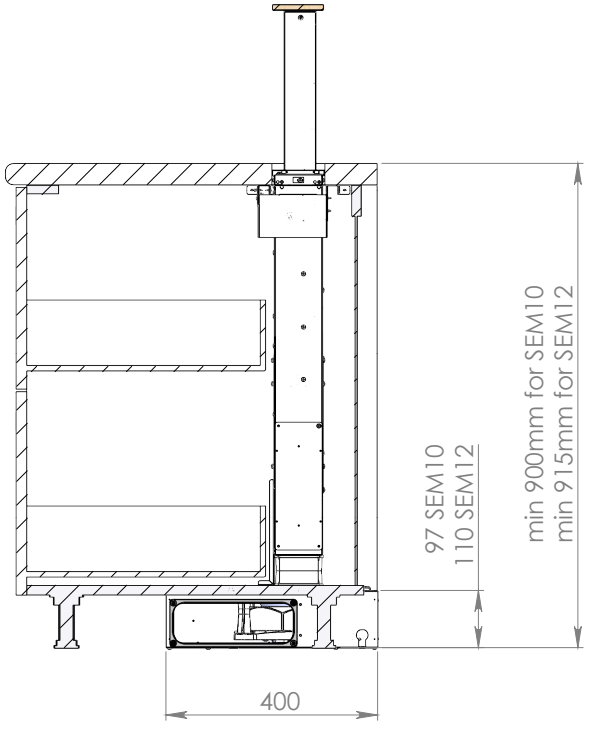


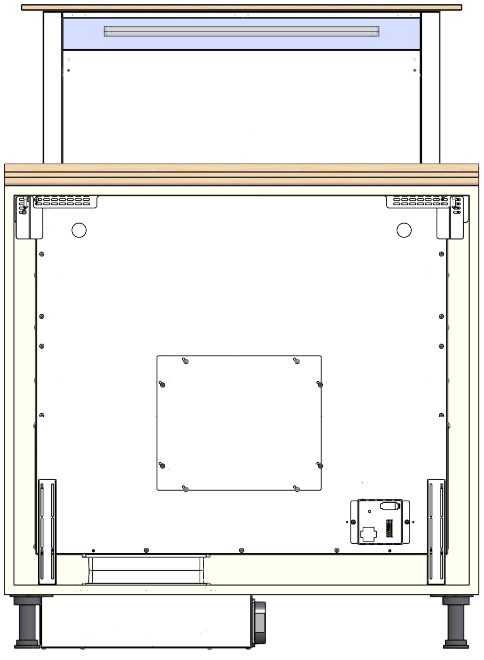


BALANCE SDD18 WITH SEM 10 - SEM 12

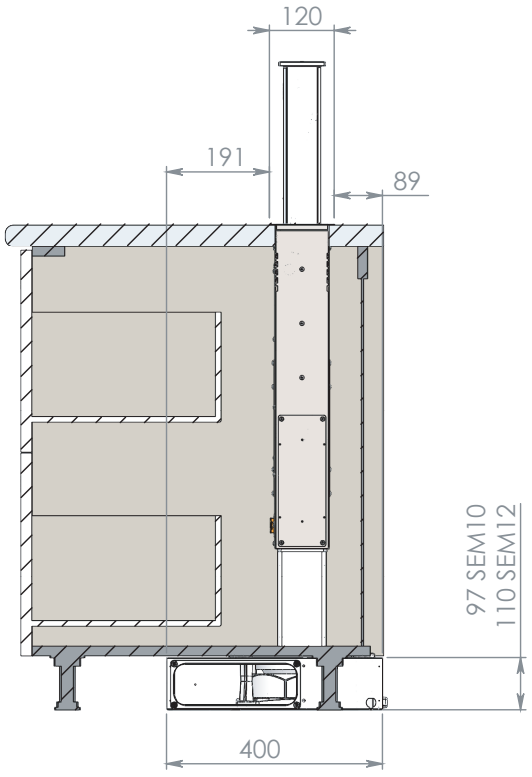

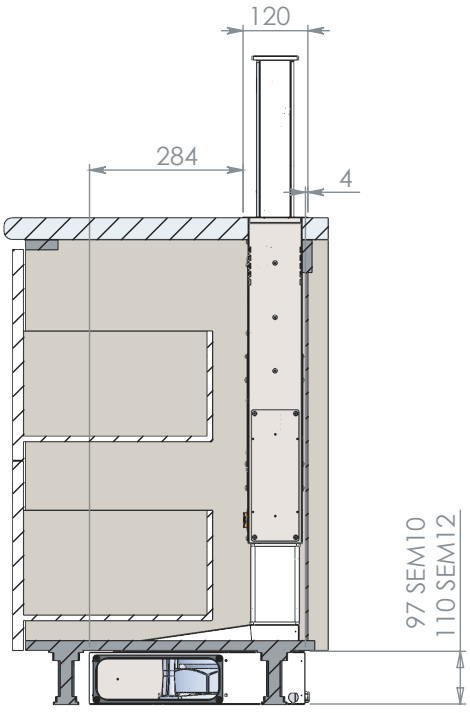

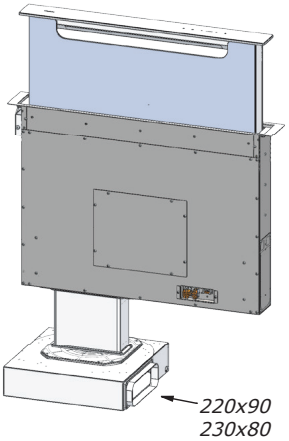


220x90
230x80
218x55 (filtering version only)

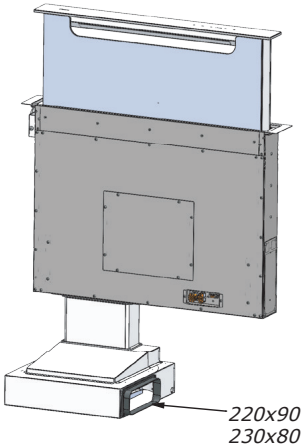


220x90
230x80
218x55 (filtering version only)


MIDDLE SDD 20

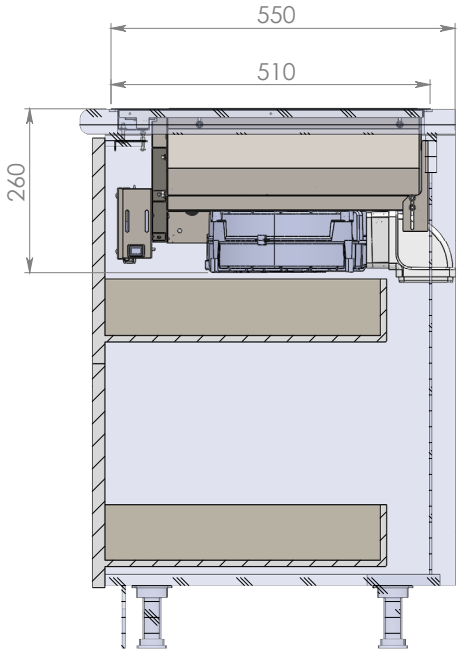


DUCTING VERSION

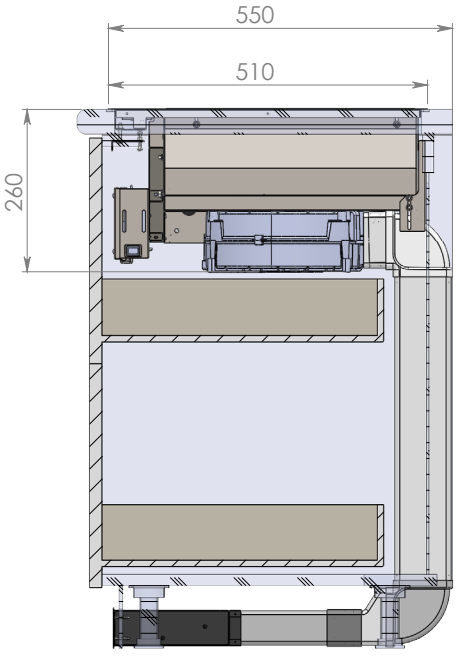


FILTERING VERSION

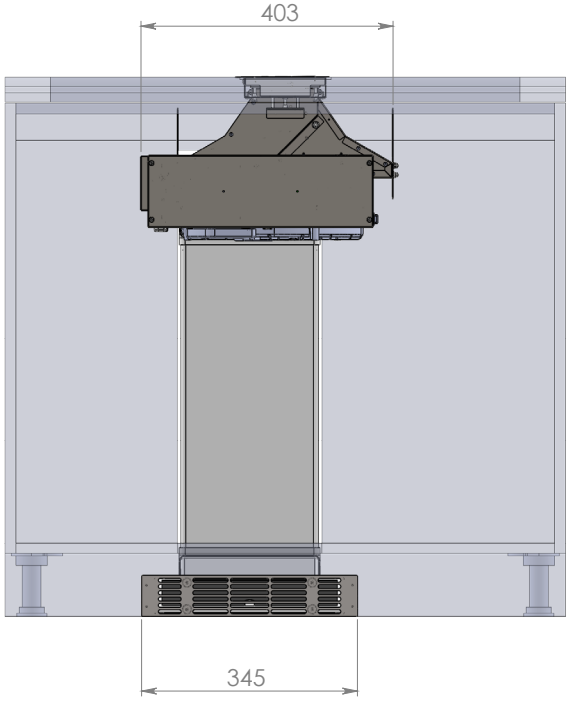


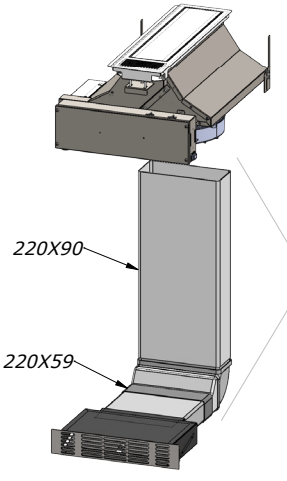



S-KFHE3
To be purchased separately
(see p.186)

PUSH UP SDD11 WITH SEM10 - SEM12

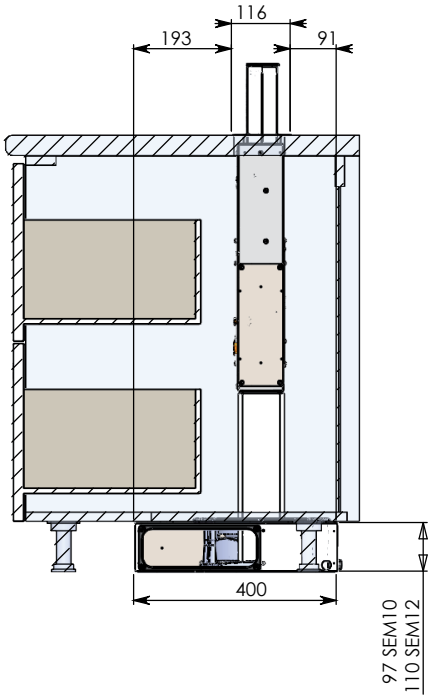

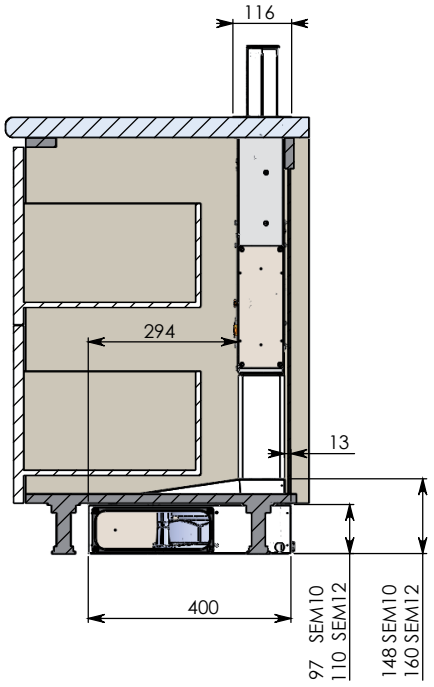

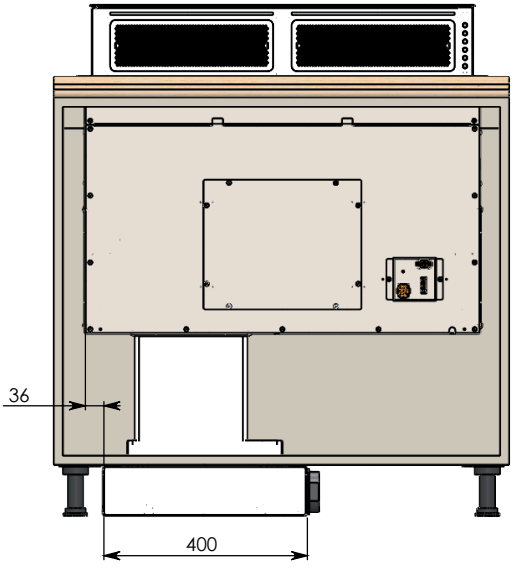


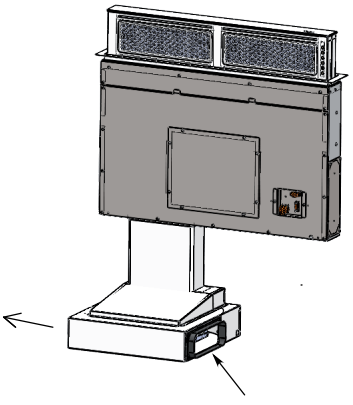


220x90
230x80
218x55 *(filtering version only)*


PUSH UP SDD11 WITH SEM1 - SEM2

(USING KIT INSTALLATION SDD16 WITH SEM1 OR SEM2)

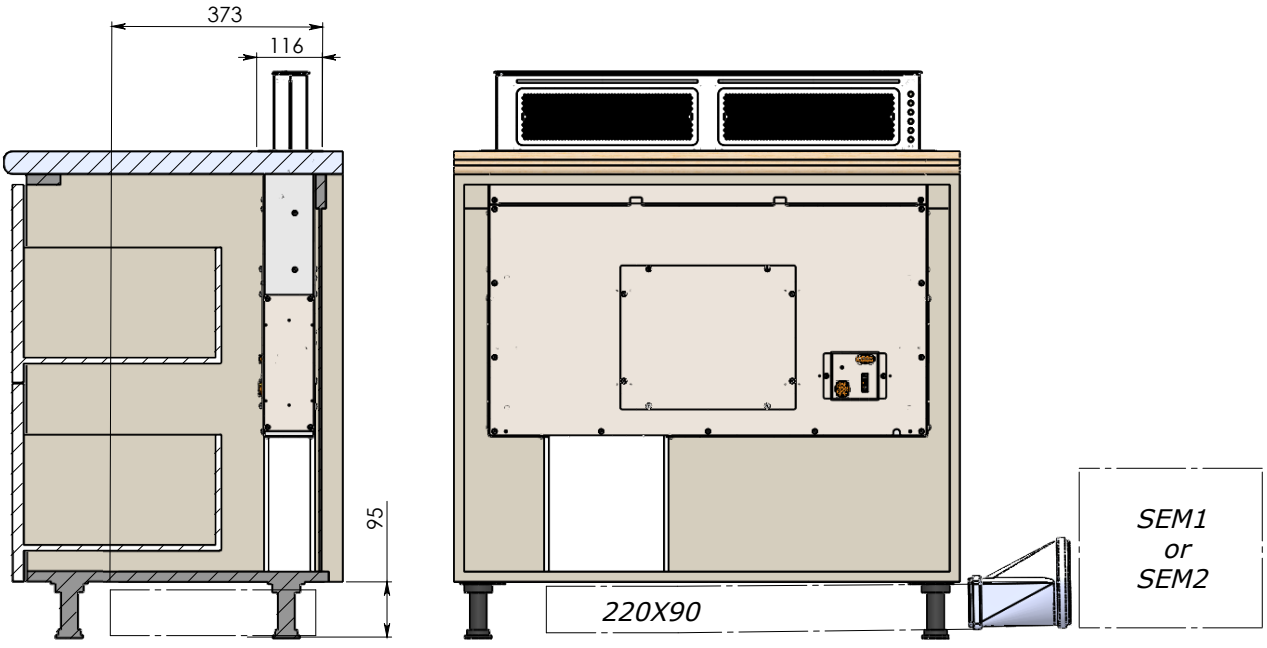


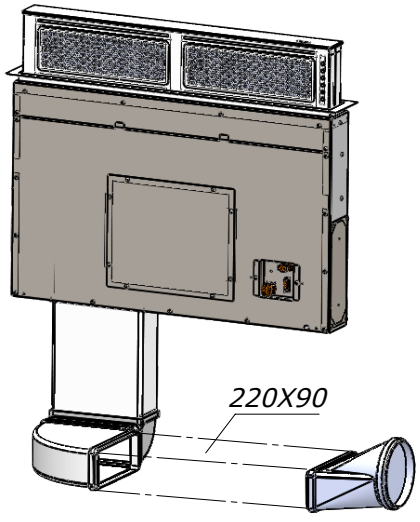


KIT INSTALLATION SEM1 OR SEM2

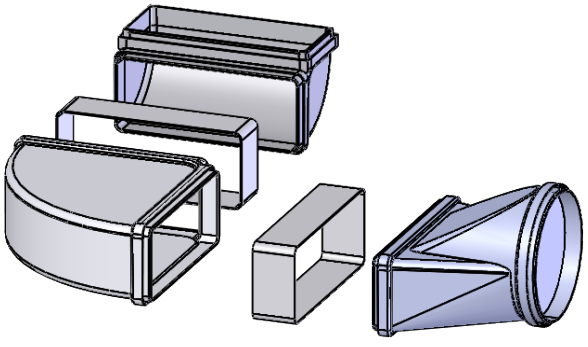

S DD2 - SDD2 L F.T. AND SUNRISE SDD13 WITH SEM10
SDD2 L F.T. CM 90 WITH SEM12*

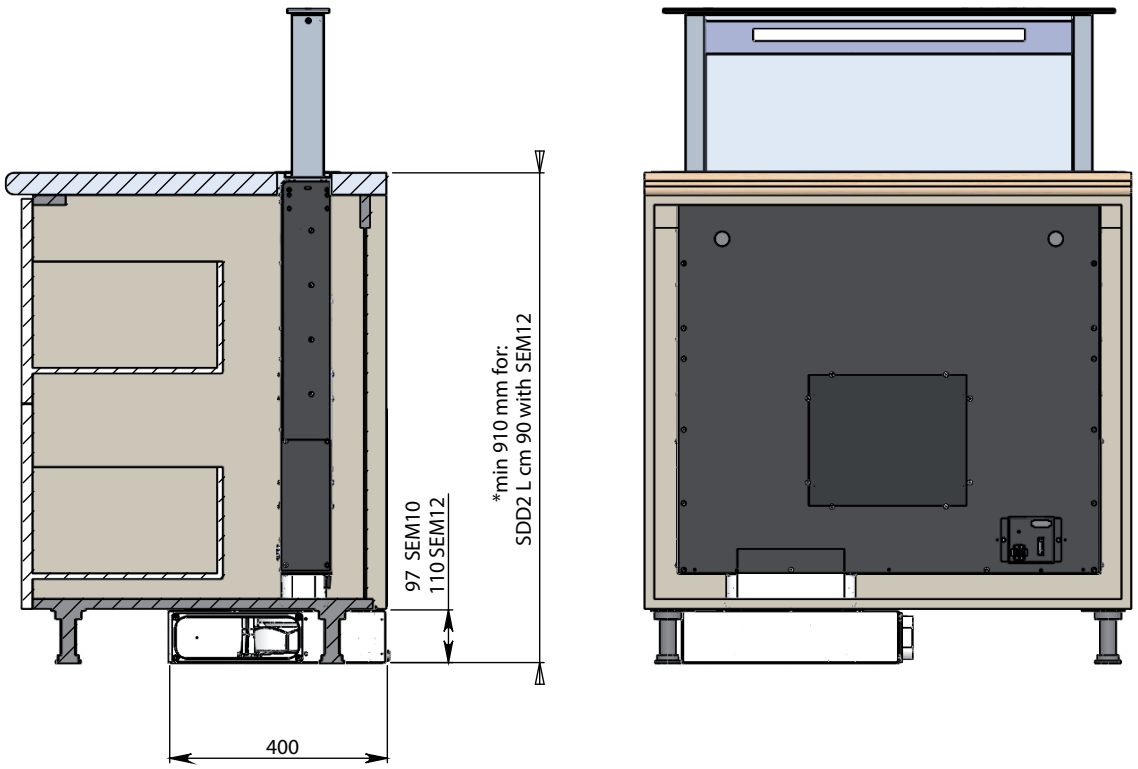

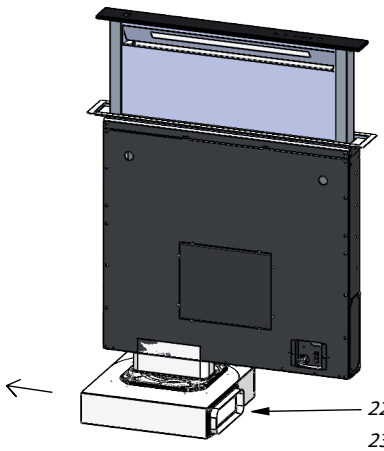

220x90

230x80

218x55 (filtering version only)





CEILING


Design ceiling hoods, which combine materials such as stainless steel or glass, with different luminous elements, able to create exclusive home environments and responding to different aesthetic and functional needs based on the characteristics of your kitchen.



INSIDE OUT SLT 980

Inside Out is a ceiling hood equipped with advanced technologies and characterised by minimal lines and extreme attention to details.
This is the perfect synthesis between aesthetics, efficiency and functionality.
This range hood activates by remote control and descends from the ceiling, allowing the extraction of cooking vapours.
After use, the hood goes back to hide in the ceiling.

Motor:
Motor on board or external motor version (to be purchased separately)
Lighting:
Dimmable and dynamic Led 11W (2700 to 6500K)
Control panel:
Remote control
Filter:
Anodized aluminum (5+1 layers)
Finishing:
White matt painted

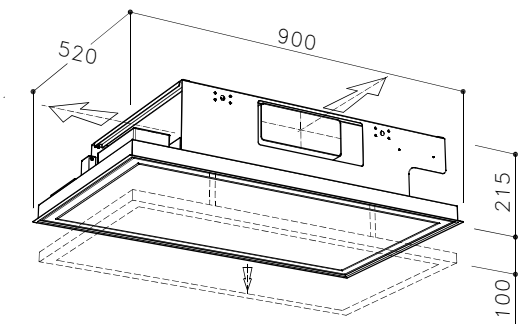

Installation:
For the installation create a false ceiling with a niche of 890mm x 510mm whose minimum height to be reached is 220 mm

product	dim.	motor	model identifier	EEC
SLT 980 E.LA. BRHM	520x900	on board	C980090RC1375181	A+
SLT 980 E.LA. EM	520x900	SEM1	C980093RC1295181	A
SLT 980 E.LA. EM	520x900	SEM2	C980093RC1155181	C

SUPERNOVA SLT 976

Motor:
Motor on board or external motor version (to be purchased separately)
Lighting:
2x1,4W Dimmable and dynamic spot leds (2700 to 6500°K)
Control panel:
Remote control
App
Voice assistant
Filter:
Anodized aluminum (5+1 layers)
Material:
Painted Stainless Steel
Handmade ceramic domes


Finishing:
Ceiling plate matt white painted
Ceramic domes white or black matt

Installation:
For the installation create a false ceiling with a niche of 425mm x 915mm whose minimum
height to be reached is 200 mm


It is possible to add a Supernova Lamp (max 3 units)
See page 70

Download on the App Store
ANDROID APP ON Google play
Google HOME
amazon alexa

product	dim.	motor	model identifier	EEC
SLT 976 E.LA. 4V APP	440x930	on board	C976093RA1244681	B
SLT 976 E.LA. BRHM APP	440x930	on board	C976093RA1374681	A++
SLT 976 E.LA. EM APP	440x930	SEM1	C976093RA1294681	A
SLT 976 E.LA. EM APP	440x930	SEM2	C976093RA1154681	B

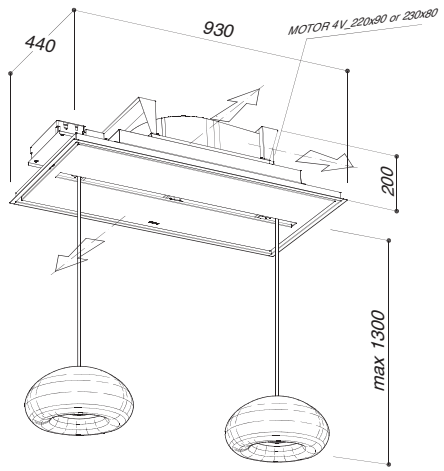

motor on board/external motor

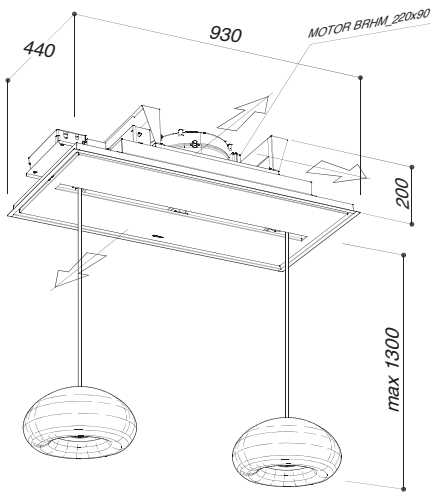


brushless motor







SUPERNOVA AUTOMATIC

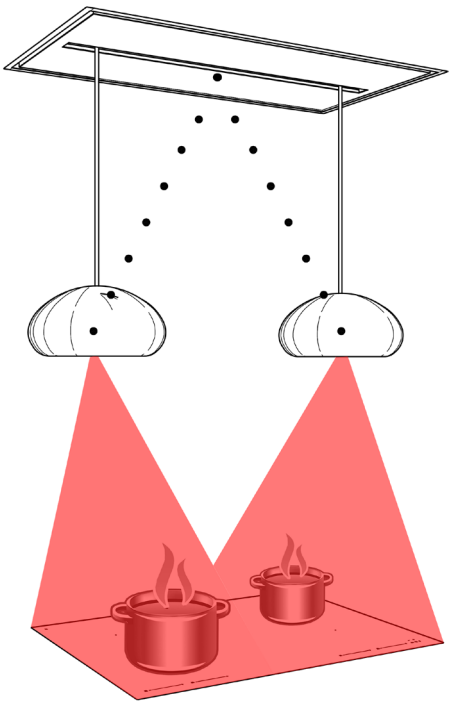


ARTIFICIAL INTELLIGENCE SYSTEM - AIS

This innovative system, patented by Sirius, is made up of sensors and technologically advanced electronic devices working in synergy.
As you start cooking, the range hood autonomously activates and adjusts the suction power, by detecting constantly both the temperature and air quality while cooking.
This innovative technology allows an autonomous and automatic operation of products and is completely independent from the kind of hob you use (gas, induction, etc.).



SUPERNOVA LAMP

Entirely hand-made by Deruta ceramic masters, Supernova Lamp is the new Sirius hanging lamp that can perfectly match Supernova range hood.
A new generation led spot properly lightens the worktop below.

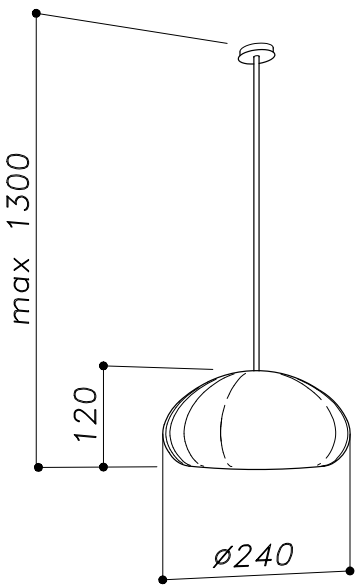

Lighting
1x1,4W Dimmable and dynamic Led spot (2700K to 6500K)
Material
Handmade ceramic
Finishing
Ceramic Dome: matt black or matt white painted






KITE LIGHT SLT 978 L

Motor:
Motor on board or external motor version (to be purchased separately)
Lighting:
Dimmable and dynamic full Led 11 W (2700 to 6500K)
Control panel:
Remote control
App
Voice assistant
Filter:
Anodized aluminum (5+1 layers)
Material:
Stainless Steel


Finishing:
Ceiling plate matt white painted

Installation:
For the installation create a false ceiling with a niche of 425mm x 915mm whose minimum height to be reached is 200 mm

product	dim.	motor	model identifier	EEC
SLT 978 LIGHT 4V APP	440x930	on board	C978093RA1245281	B
SLT 978 LIGHT BRHM APP	440x930	on board	C978093RA1375281	A+
SLT 978 LIGHT EM APP	440x930	SEM1	C978093RA1295281	A
SLT 978 LIGHT EM APP	440x930	SEM2	C978093RA1155281	C

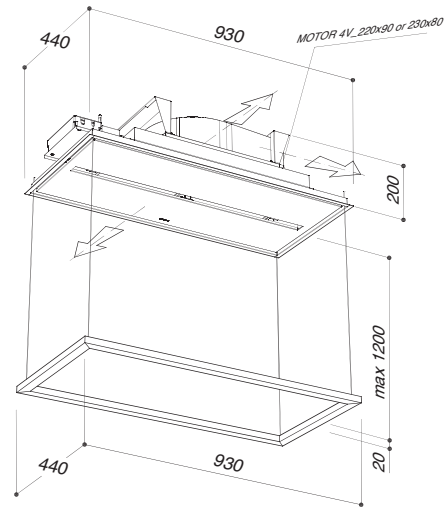

motor on board/external motor

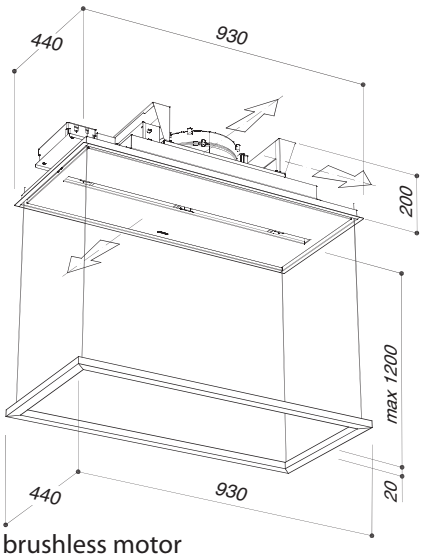

brushless motor

Download on the App Store
ANDROID APP ON Google play
amazon alexa
Google HOME






KITE SLT 978

Motor:
Motor on board or external motor version (to be purchased separately)
Lighting:
Dimmable and dynamic Led 11 W (2700 to 6500K)
Control panel:
Remote control
App
Voice assistant
Filter:
Anodized aluminum (5+1 layers)
Material:
Stainless Steel


Finishing:
Ceiling plate matt white painted
Led frame matt black or matt white

Installation:
For the installation create a false ceiling with a niche of 425mm x 915mm whose minimum height to be reached is 200 mm

product	dim.	motor	model identifier	EEC
SLT 978 4V APP	440x930	on board	C978093RA1245281	B
SLT 978 BRHM APP	440x930	on board	C978093RA1375281	A+
SLT 978 EM APP	440x930	SEM1	C978093RA1295281	A
SLT 978 EM APP	440x930	SEM2	C978093RA1155281	C

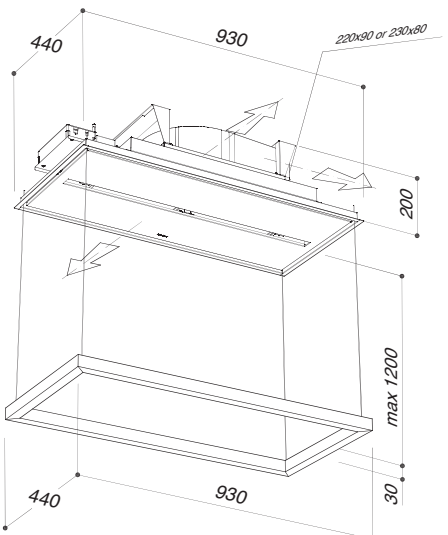

motor on board/external motor

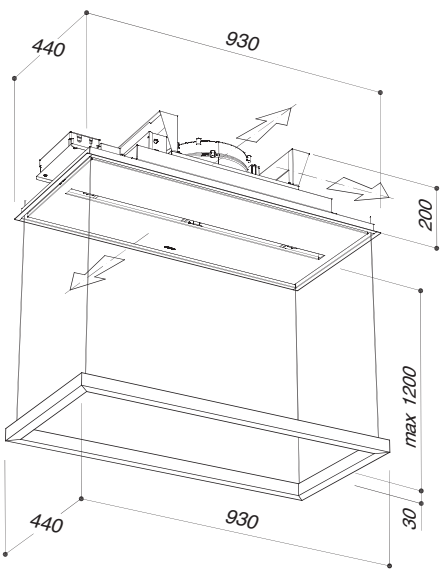

brushless motor

Download on the App Store
ANDROID APP ON Google play
amazon alexa
Google HOME


LINE SLT 977

Motor:
Motor on board or external motor version (to be purchased separately)
Lighting:
Dimmable and dynamic full Led 5 W (2700 to 6500K)
Control panel:
Remote control
App
Voice assistant
Filter:
Anodized aluminum (5+1 layers)
Material:
Stainless Steel


Finishing:
Ceiling plate matt white painted

Installation:
For the installation create a false ceiling with a niche of 425mm x 915mm whose minimum height to be reached is 200 mm

product	dim.	motor	model identifier	EEC
SLT 977 4V APP	440x930	on board	C977093RA1245481	B
SLT 977 BRHM APP	440x930	on board	C977093RA1375481	A++
SLT 977 EM APP	440x930	SEM1	C977093RA1295481	A
SLT 977 EM APP	440x930	SEM2	C977093RA1155481	B

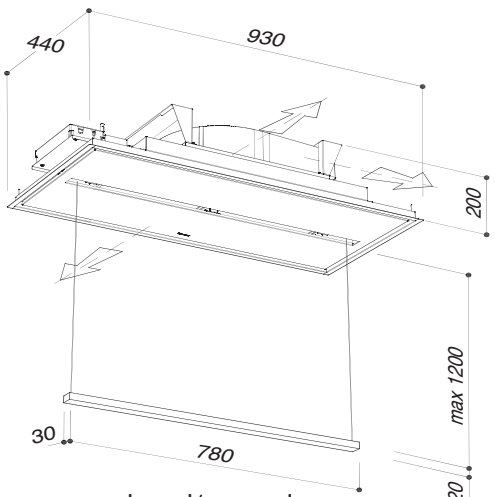

motor on board/external motor

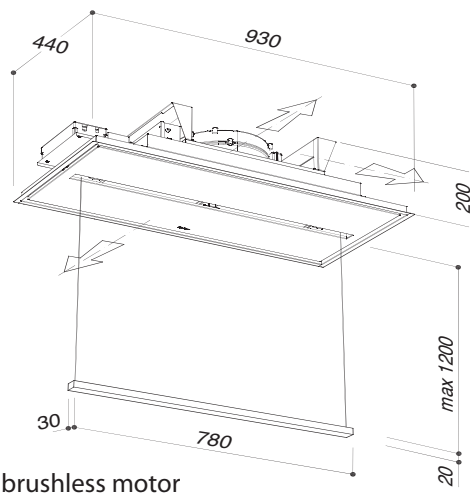

brushless motor

Download on the App Store
ANDROID APP ON Google play
amazon alexa
Google HOME










HALO LIGHT SLT 973 L


Motor:
Motor on board or external motor version (to be purchased separately)
Lighting:
Dimmable and dynamic round full Led 10W (2700 to 6500K)
Control panel:
Remote control
App
Voice assistant
Filter:
Anodized aluminum (5+1 layers)
Material:
Stainless Steel

Finishing:
Ceiling plate in stainless Steel matt white painted

Installation:
For the installation create a false ceiling with a round niche of 510mm whose minimum height to be reached is 220 mm

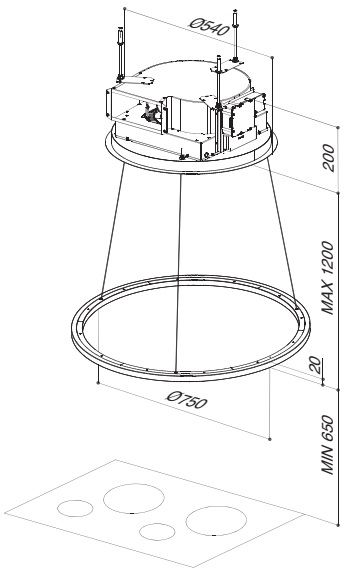

motor on board/external motor

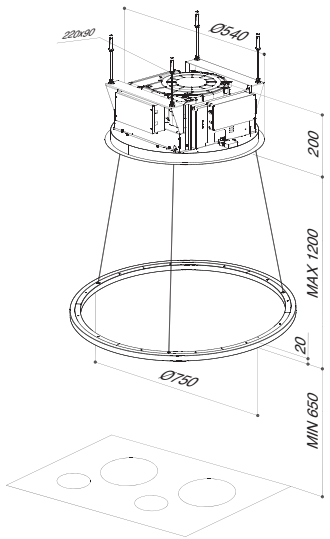

brushless motor

product	motor	model identifier	EEC
SLT 973 4V LIGHT APP	on board	C973075RA1245333	B
SLT 973 BRHM LIGHT APP	on board	C973075RA1375333	A+
SLT 973 EM LIGHT APP	SEM1	C973075RA1295333	A
SLT 973 EM LIGHT APP	SEM2	C973075RA1155333	C

Download on the App Store
ANDROID APP ON Google play
amazon alexa
Google HOME



HALO SLT 973


Motor:
motor on board or external motor version (to be purchased separately)
Lighting:
Dimmable and dynamic round Led 10W (2700 to 6500K)
Control panel:
Remote control
App
Voice assistant
Filter:
Anodized aluminum (5+1 layers)
Material:
Stainless Steel

Finishing:
Ceiling plate in stainless Steel matt white painted
Led frame matt black or white


Installation:
For the installation create a false ceiling with a round niche of 510mm whose minimum height to be reached is 220 mm

product	motor	model identifier	EEC
SLT 973 4V APP	on board	C973075RA1245333	B
SLT 973 BRHM APP	on board	C973075RA1375333	A+
SLT 973 EM APP	SEM1	C973075RA1295333	A
SLT 973 EM APP	SEM2	C973075RA1155333	C

Download on the App Store
ANDROID APP ON Google play
amazon alexa
Google HOME

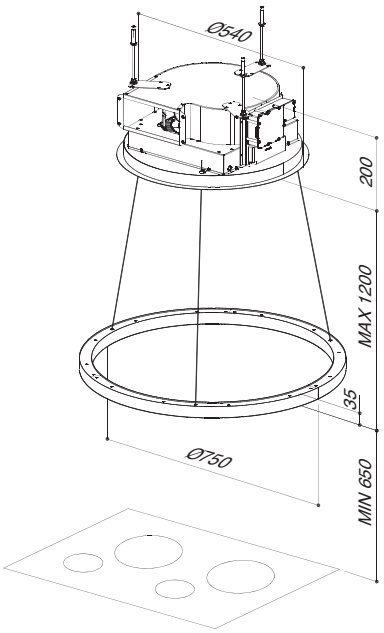

motor on board/external motor

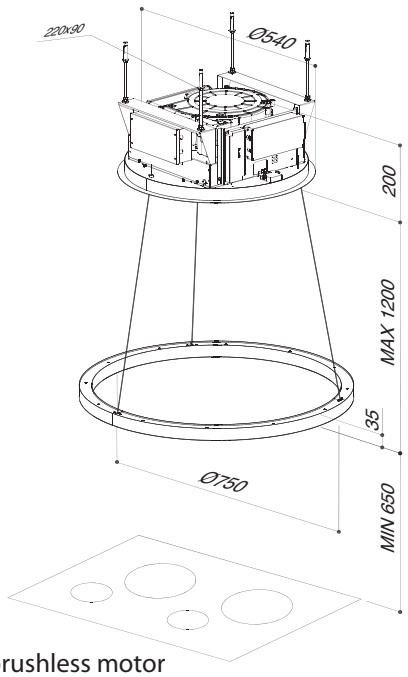

brushless motor




SCREEN SLT 974


Motor:
motor on board or external motor version (to be purchased separately)
Lighting:
Dimmable and dynamic Led panel 7W (2700 to 6500°K)
Control panel:
Remote control
App
Voice assistant
Filter:
Anodized aluminum (5+1 layers)
Material:
Stainless steel

Finishing:
White painted

Installation:
For the installation create a false ceiling with a niche of 815mm for 465mm whose minimum height to be reached is 220mm

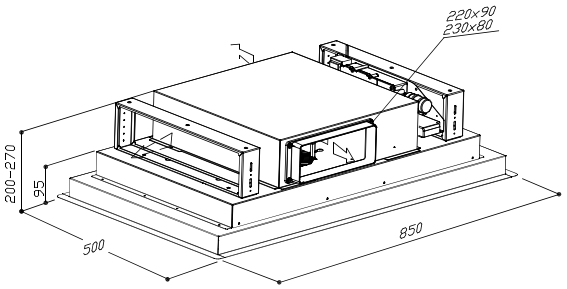

motor on board/external motor

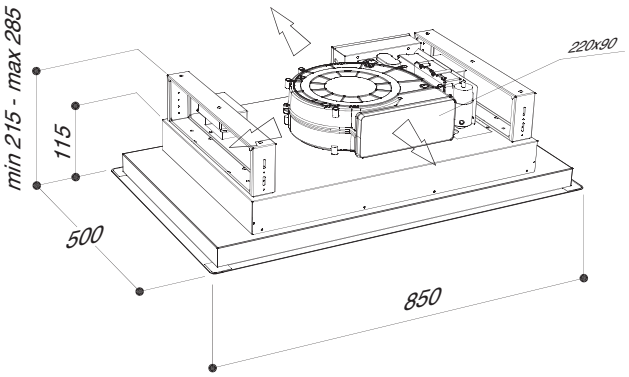

brushless motor

product	dim.	motor	model identifier	EEC
SLT 974 4V APP	500x850	on board	C974085RC1243773	B
SLT 974 BRHM APP	500x850	on board	C974085RA1373773	A++
SLT 974 EM APP	500x850	SEM1	C974085RA1293773	A
SLT 974 EM APP	500x850	SEM2	C974085RC1153773	B

Download on the App Store
ANDROID APP ON Google play
amazon alexa
Google HOME


FRAME SLT 970

Motor:
motor on board or external motor version (to be purchased separately
Lighting:
3x2,5W Dimmer Led spotlight
Control panel:
Remote control
Filter:
Anodized aluminum (5+1 layers)
Material:
White glass


Finishing:
White glass with crystal transparent edge

Installation:
For the installation create a false ceiling with a niche of 850mm x 470mm whose minimum height to be reached is 200 mm (Built-in version)




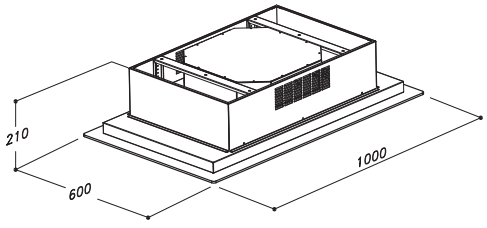


freestanding (filtering version only)
motor on board

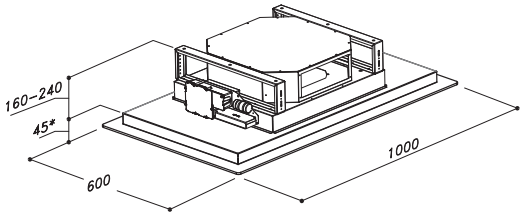

built-in
** this part must not be built-in*
motor on board/external motor

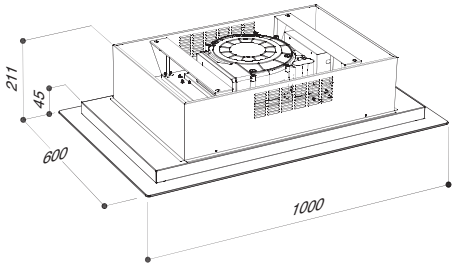

freestanding (filtering version only)
brushless motor

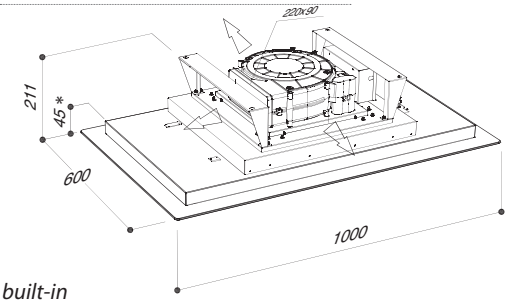

built-in
** this part must not be built-in*
brushless motor



product	dim.	motor	model identifier	EEC
SLT 970	600x1000	on board	C970100RC1243637	B
SLT 970 BRH M	600x1000	on board	C970100RC1373637	A++
SLT 970 EM	600x1000	SEM1	C970100RC1293643	B
SLT 970 EM	600x1000	SEM 2	C970100RC1153643	C

LESS SLT 971


Motor:
motor on board or external motor version (to be purchased separately)
Lighting:
6W Dimmable and dynamic Led bar (2700 to 6500°K) (90cm version)
2X3,75W Dimmable and dynamic Led bar (2700 to 6500°K) (120cm version)
Control panel:
Remote control
Filter:
Anodized aluminum (5+1 layers)
Material:
Stainless steel AISI430 (SLT971 inox version)
White painted stainless steel and glass (SLT971 glass version)




Finishing:
Stainless steel (SLT971 inox version)
White painted stainless steel and white glass panel (SLT971 glass version)

Installation:
For the installation create a false ceiling with a niche of:
865mmx 515mm whose minimum height to be reached is 210mm (SLT971 cm90 motor on board version) or 170mm (SLT971 cm90 external motor version)
1165mm x 615mm whose minimum height to be reached is 210mm (SLT971 cm120 motor on board version) or 170mm (SLT971 cm120 external motor version)


product	dim.	motor	model identifier	EEC
SLT 971	550x900	on board	C971090RC1244143	B
SLT 971 BRHM	550x900	on board	C971090RC1374143	A++
SLT 971 EM	550x900	SEM1	C971090RC1294143	B
SLT 971 EM	550x900	SEM 2	C971090RC1154143	C
SLT 971	650x1200	on board	C971120RC1244037	B
SLT 971 BRHM	650x1200	on board	C971120RC1374037	A++
SLT 971 EM	650x1200	SEM1	C971120RC1294037	B
SLT 971 EM	650x1200	SEM 2	C971120RC1154037	C

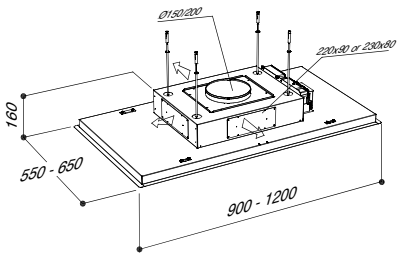

external motor

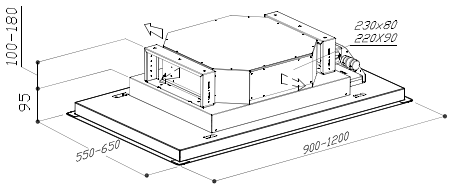

motor on board

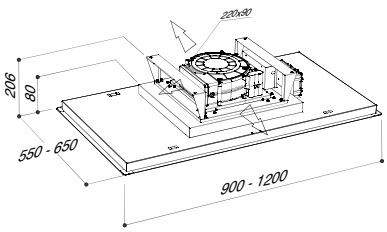

brushless motor




ZENDRA SLT979


Motor:
motor on board or external motor version (to be purchased separately)
Lighting:
2x5,5W Dimmable and dynamic Led panels (2700 to 6500°K)
Control panel:
Remote control
App Sirius
Voice assistant
Filter:
Anodized aluminum (5+1 layers)
Material:
Painted stainless Steel

Finishing:
White

Installation:
For the installation create a false ceiling with a niche of 1050mm for 645mm whose minimum height to be reached is 210mm

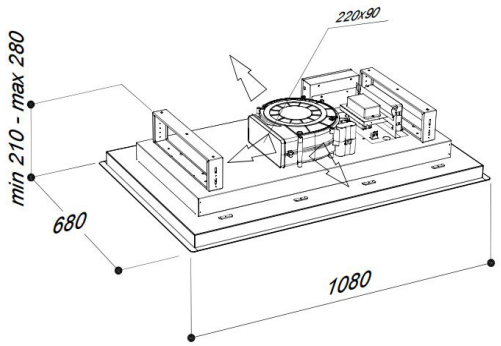

brushless motor

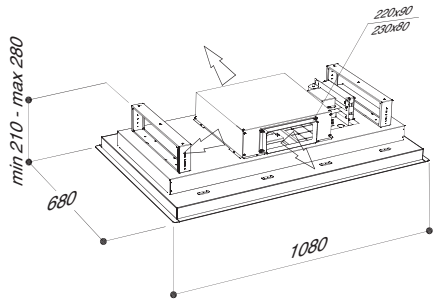

motor on board/external motor

product	dim.	motor	model identifier	EEC
SLT 979 E.LA. 4V APP	680x1080	on board	C979108RA1244860	B
SLT 979 E.LA. BRHM APP	680x1080	on board	C979108RA1374860	A+
SLT 979 E.LA. EM APP	680x1080	SEM 1	C979108RA1294860	A
SLT 979 E.LA. EM APP	680x1080	SEM 2	C979108RA1154860	B

Download on the App Store
ANDROID APP ON Google play
amazon alexa
Google HOME




SLT 958


Motor:
motor on board or external motor version (to be purchased separately)
Lighting:
2X3,75W Dimmable and dynamic Led bar (2700 to 6500°K)
Control Panel:
Remote Control
Filter:
Anodized aluminum (5+1 layers)
Material:
Stainless Steel AISI430
Finishing:
stainless steel
white painted and white glass



Installation:
Create a false ceiling with a niche of 865mm x 405mm whose minimum height to be reached is 210mm.

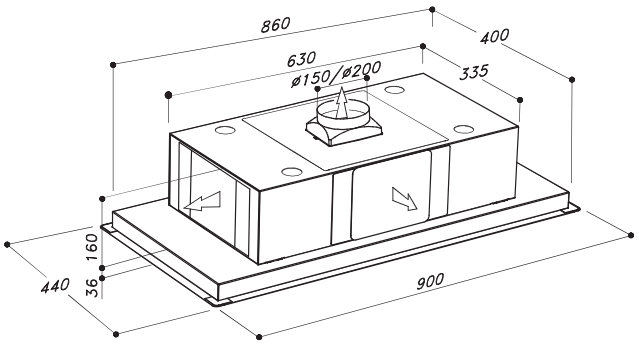


external motor

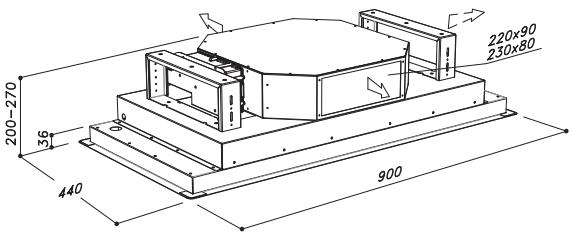

h200 version


product	dim.	motor	model identifier	EEC
SLT 958 H200	440x900	on board	C958090RC1244073	B
SLT 958 H200 BRHM	440x900	on board	C958090RC1374073	A++
SLT 958 EM	440x900	SEM 1	C958090RC1294037	B
SLT 958 EM	440x900	SEM 2	C958090RC1154037	B

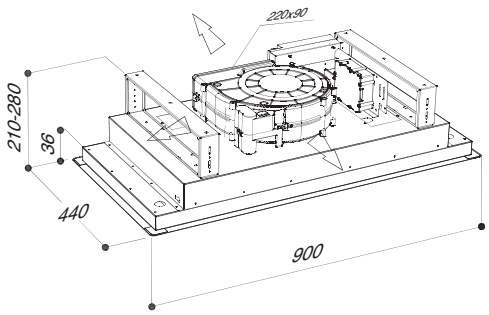


brushless motor




S-DF4 FILTERING KIT

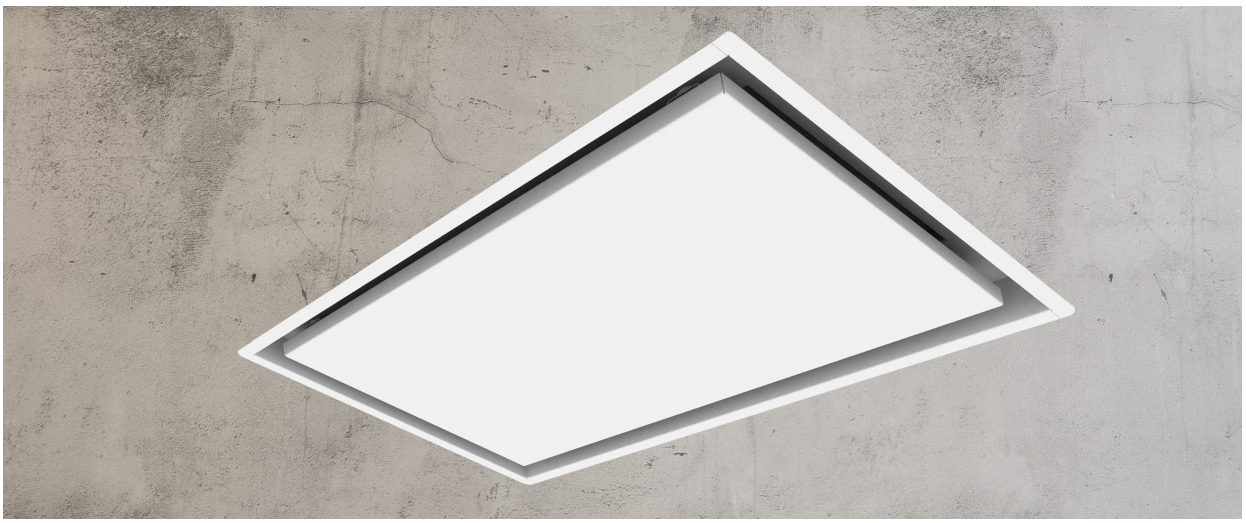


The S-DF4 filtering kit can be combined with all built-in ceiling hoods allowing the customer to obtain the filtering version of the product.
Placed at a minimum distance of 1.5 meters from the ceiling hood, it allows perfect recirculation and filtering of the air sucked in by the ceiling hood.
The high efficiency carbon filters guarantee the perfect elimination of cooking odours.

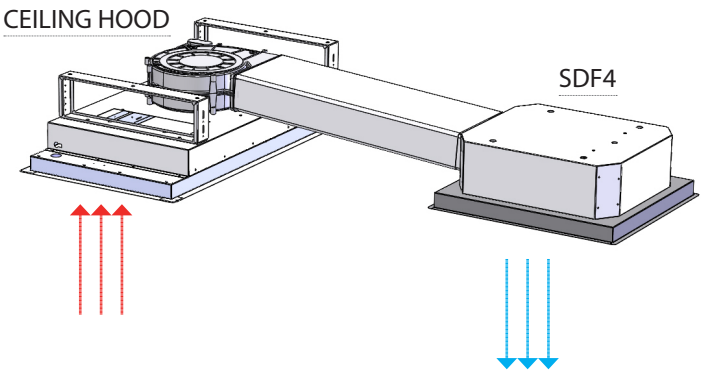

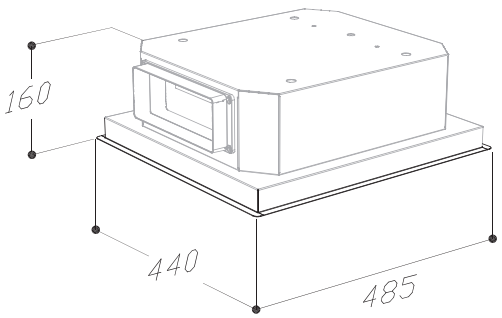

WHAT'S IN THE BOX?
1X KF24 HIGHT EFFICIENCY CARBON FILTER
1X RECTANGULAR JOINT 220X90mm
1x ROUND JOINT D150mm

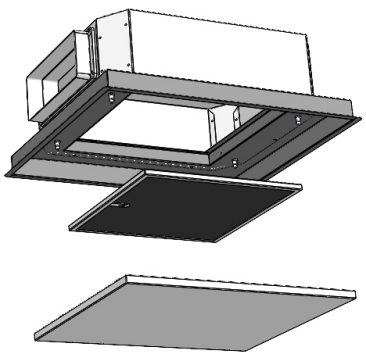

DECORATIVE ISLAND

Sirius island hoods represent the perfect technological and aesthetic solution for island or peninsula kitchens.
With an elegant and contemporary design, they adapt to any type of kitchen style and guarantee perfect functionality both in extraction and filtering mode







Sirius



NEMESI SIL 36 TC

Motor
on board
Lighting:
2x6W Dimmable and dynamic Led bar (2700 to 6500°K)
Control panel:
Touch control 4 speeds + light switch + timer + Anti-drop System
Filter:
Anodized aluminum (5+1 layers)
Finishing:
Black matte painted
Smoked glass

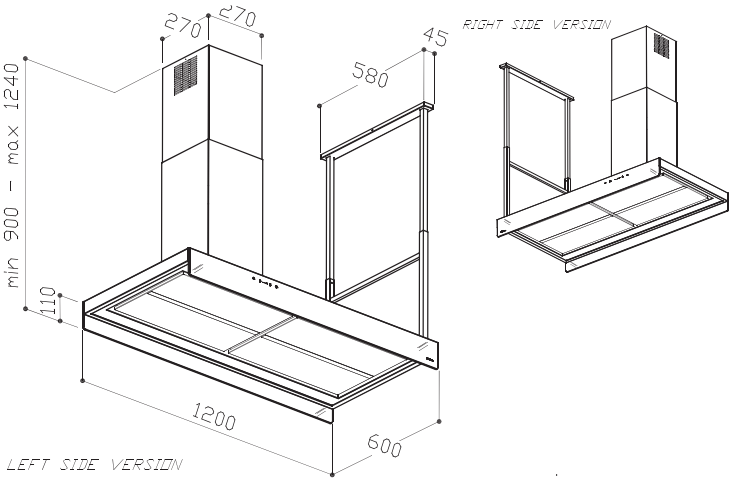

ANTI-DROP SYSTEM


product	dim.	motor	model identifier	EEC
SILTC36	1200	on board	I036120TA1284143	A








SYMPHONY MO 409

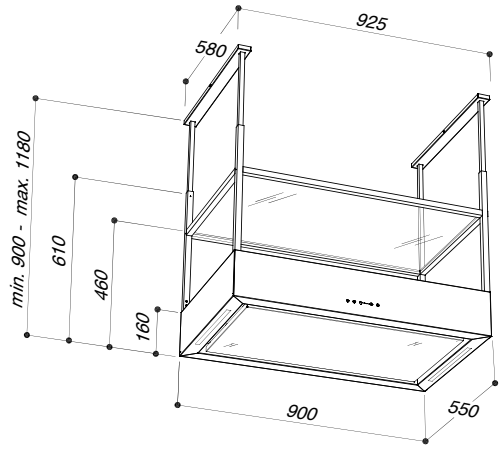

Symphony

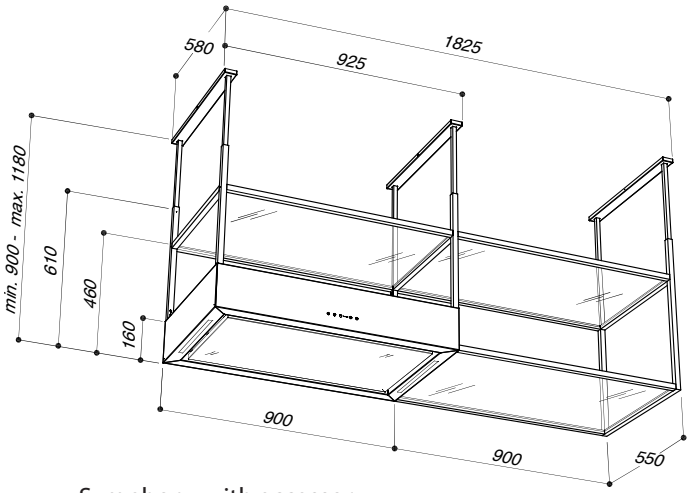

Symphony with accessory

Motor on board:
EBM 550m3/h
110W
50 dBA
Lighting:
2x3,75W Dimmable and dynamic Led bar (2700 to 6500°K)
Control panel:
Touch control 4 speeds +light switch +timer+Anti-drop System
Filter:
Anodized aluminum (4+1 layers)
Washable carbon filter KF60 (Black)
Finishing:
Matt black painted
Smoked glass







ANTI-DROP SYSTEM



MELODY MO 409 W FILTERING

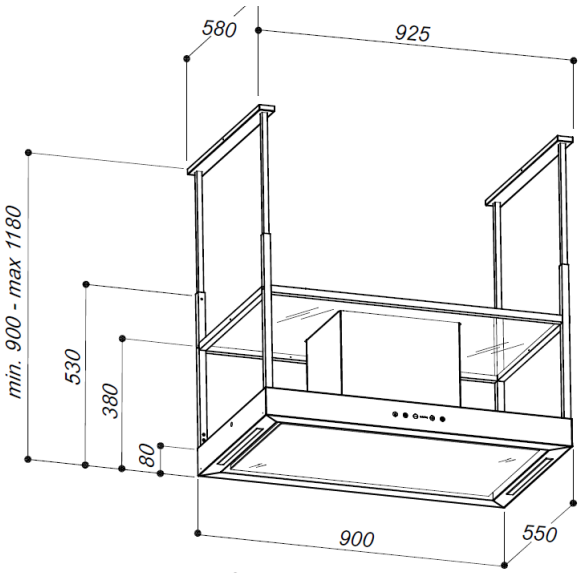

Melody filtering

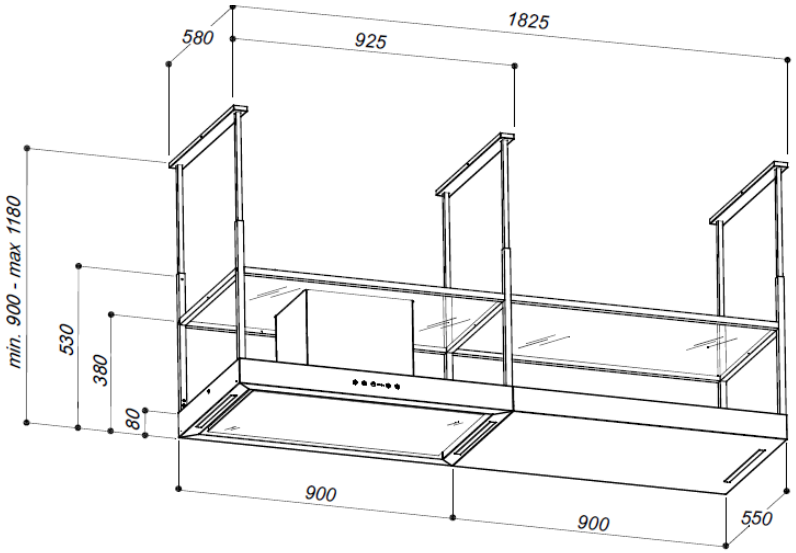

Melody filtering with accessory

Motor on board

Lighting:

2x3,75W Dimmable and dynamic Led bar (2700 to 6500°K) (Main module)

1x3,75W Dimmable and dynamic Led bar (2700 to 6500°K) (Accessory module)

Control panel:

Touch control 4 speeds+light switch+timer+Anti-drop System

Filter:

Anodized aluminum (4+1 layers)

Carbon filter KF2

Finishing:

Matt black painted

Smoked glass

Dimension:

Main module 90x55cm

Accessory module 90x55cm




ANTI-DROP SYSTEM






MELODY MO 409 W

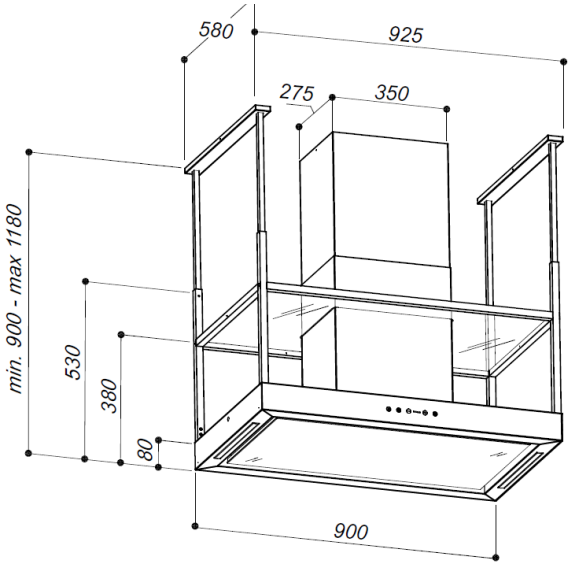

Melody

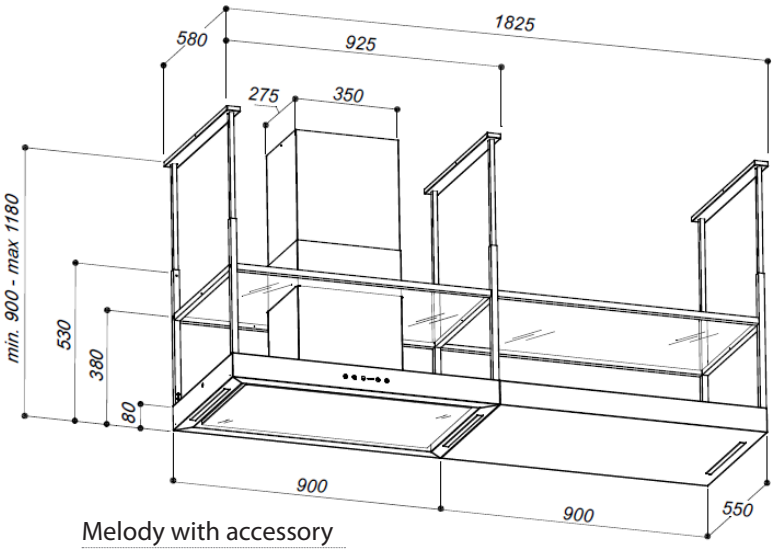

Melody with accessory

Motor on board

Lighting:

2x3,75W Dimmable and dynamic Led bar (2700 to 6500°K) (Main module)

1x3,75W Dimmable and dynamic Led bar (2700 to 6500°K) (Accessory module)

Control panel:

Touch control 4 speeds+light switch+timer+Anti-drop System

Filter:

Anodized aluminum (4+1 layers)

Finishing:

Matt black painted

Smoked glass

Dimension:

Main module 90x55cm


Accessory module 90x55cm

product	motor	model identifier	EEC
MO409W	on-board	I409090TA1104443	A
MO409W (with accesory)	on-board	I409090TB1104443	A

ANTI-DROP SYSTEM

ROLL SILT 28



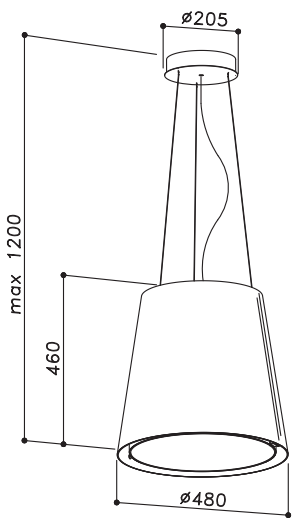


Motor on board:
600m3/h
230W
63dBA
Lighting:
Rounded NEON 40W
Control panel:
Remote control
Grease filter:
Anodized aluminum (4+1 layers)
Washable carbon filter KF39
Material:
Painted stainless steel
Finishing:
Gold, Copper, Black,White
Only filtering version
Only filtering version
Available in lamp version
Lighting:
round neon 40W





SIL 24 TC

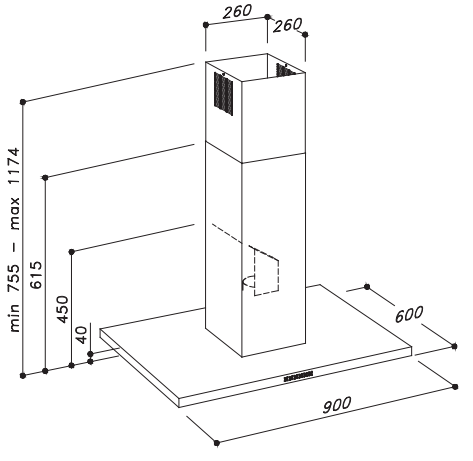

product	dim.	motor	model identifier	EEC
SIL 24 TC	900	on-board	I024090TC1284437	A

Motor on board

Lighting:
2x3,75W Dimmable and dynamic Led bar (2700 to 6500°K)

Control panel:
Touch Control 4 speeds + light switch + timer


Grease filter:
Baffle filter AISI430

Material:
Stainless steel AISI430 and glass

Finishing:
Black glass

SIL 24



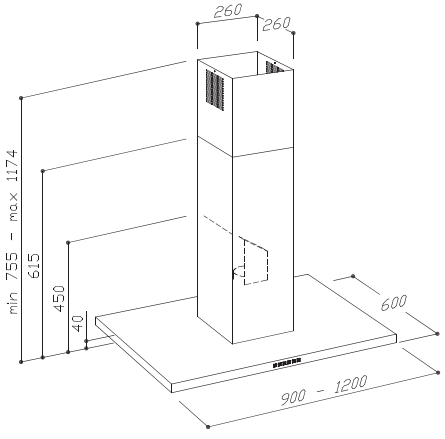

product	dim.	motor	model identifier	EEC
SIL 24X	900	on-board	I024090PB1284437	A
SIL 24X	1200	on-board	I024120PB1284437	A

Motor on board

Lighting:

2x3,75W Dimmable and dynamic Led bar (2700 to 6500°K)

Control panel:

Chromed 4 speeds push-button+light switch+timer


Grease filter:

Baffle filter AISI430

Material:

Stainless steel AISI430



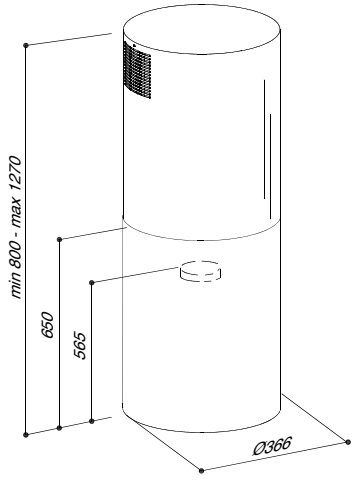

MO 407

Motor on board

Lighting:

2 Led spot 2,5W 4000°K

Control Panel:

Remote Control

Grease filter:

Anodized aluminum (5+1 layers)

Material:


Stainless steel AISI430

Finishing:

Stainless steel
Matt white painted
Matt black painted

product	motor	model identifier	EEC
MO407	on-board	I407037RC1283685	A



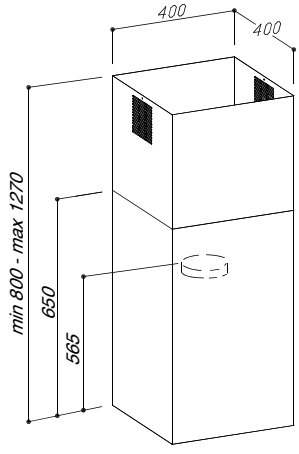

product	motor	model identifier	EEC
MO408	on-board	I408040RC1283685	A

MO 408

Motor on board

Lighting:

2 Led spot 2,5W 4000°K

Control Panel:

Remote Control

Grease filter:

Anodized aluminum (5+1 layers)

Material:

Stainless steel AISI430

Finishing:

Stainless steel
Matt white painted
Matt black painted





WALL

Sirius wall rangehoods are the perfect union of technology, functionality and design.
Unique and exclusive products that give character and style to any type of kitchen.




ARROW SLTC120



Available with S.A.M.S. System
see page 10


Motor:
on board
Lighting:
1x3,75W Dimmable and dynamic Led bar (2700 to 6500°K)
Control panel:
Touch control 4 speeds + light switch + timer + Air Management System
Filter:
Anodized aluminum (5+1 layers)
Finishing:
Matt black painted
Smoked glass
S.A.M.S. Sirius Air Management System

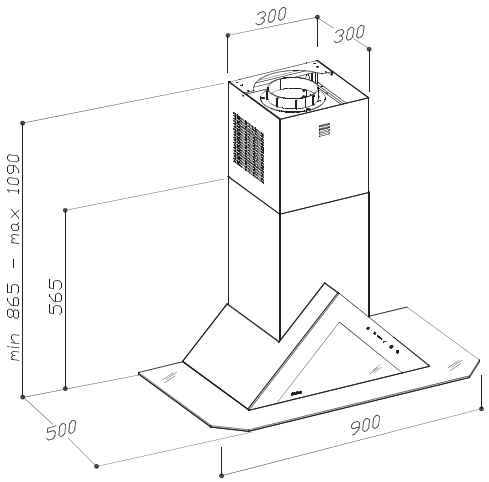

product	dim.	motor	model identifier	EEC
SL120	900	on board	P120090TV1284404	A+

FLAT SLTC 111

Motor on board:
Top or back vented
Lighting:
3,75W Dimmable and dynamic Led bar (2700 to 6500°K)
Control panel:
Touch Control 4 speeds + light switch + timer
Grease filter:
Anodized aluminum (5+1 layers)
Material:
Stainless Steel AISI430 and glass
Finishing:
Front panel in White or Black glass with crystal transparent edge
Back glass White

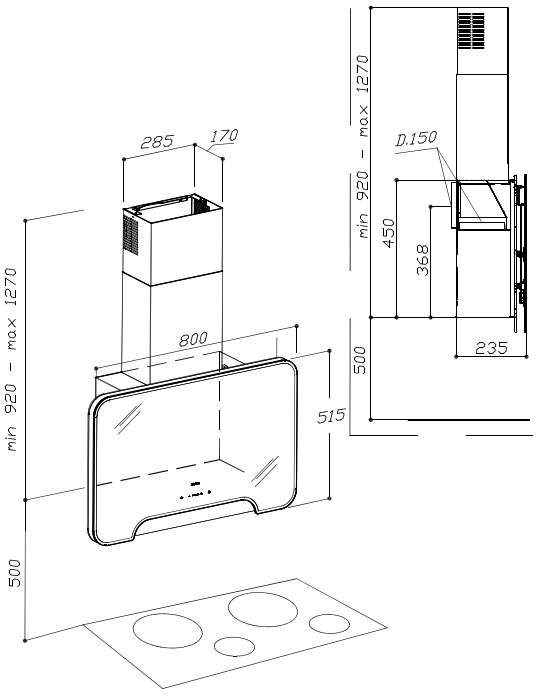



product	dim.	motor	model identifier	EEC
SLTC111	800	on-board	P111080TC1240237	A




FLAT SLTC 111 Anti-drop

Motor on board:
Top or back vented
Lighting:
3,75W Dimmable and dynamic Led bar (2700 to 6500°K)
Control panel:
Touch Control 4 speeds + light switch + timer + Antidrop System
Grease filter:
Anodized aluminum (5+1 layers)
Material:
Black matt painted stainless steel and glass
Finishing:
Front panel in Black glass with bronze edge

ANTI-DROP SYSTEM

product	dim.	motor	model identifier	EEC
SLTC111 ANT.	800	on-board	P111080TA1364422	A

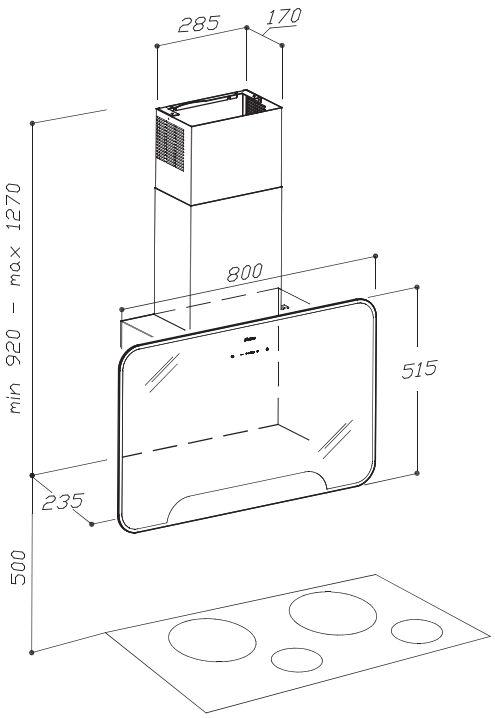



Sirius

SLTC 119


Motor on board:
Top or back vented
Lighting:
3,75W Dimmable and dynamic Led bar (2700 to 6500°K)
Control panel:
Touch Control 4 speeds + light switch + timer
Filter:
Anodized aluminum (5+1 layers)
Material:
Stainless Steel AISI430
Finishing:
Inox / Black




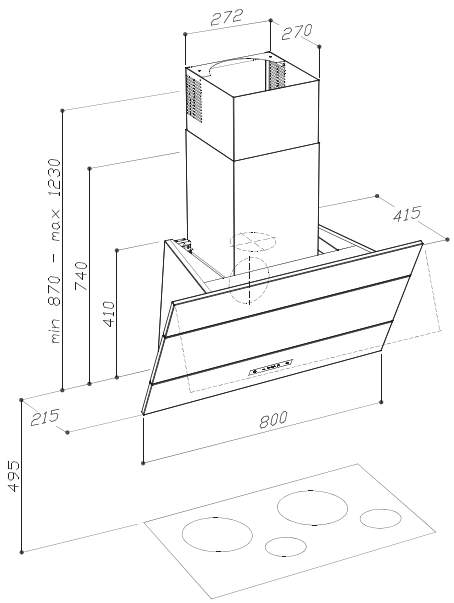

product	dim.	motor	model identifier	EEC
SLTC119	800	on-board	P119080TC1284022	A



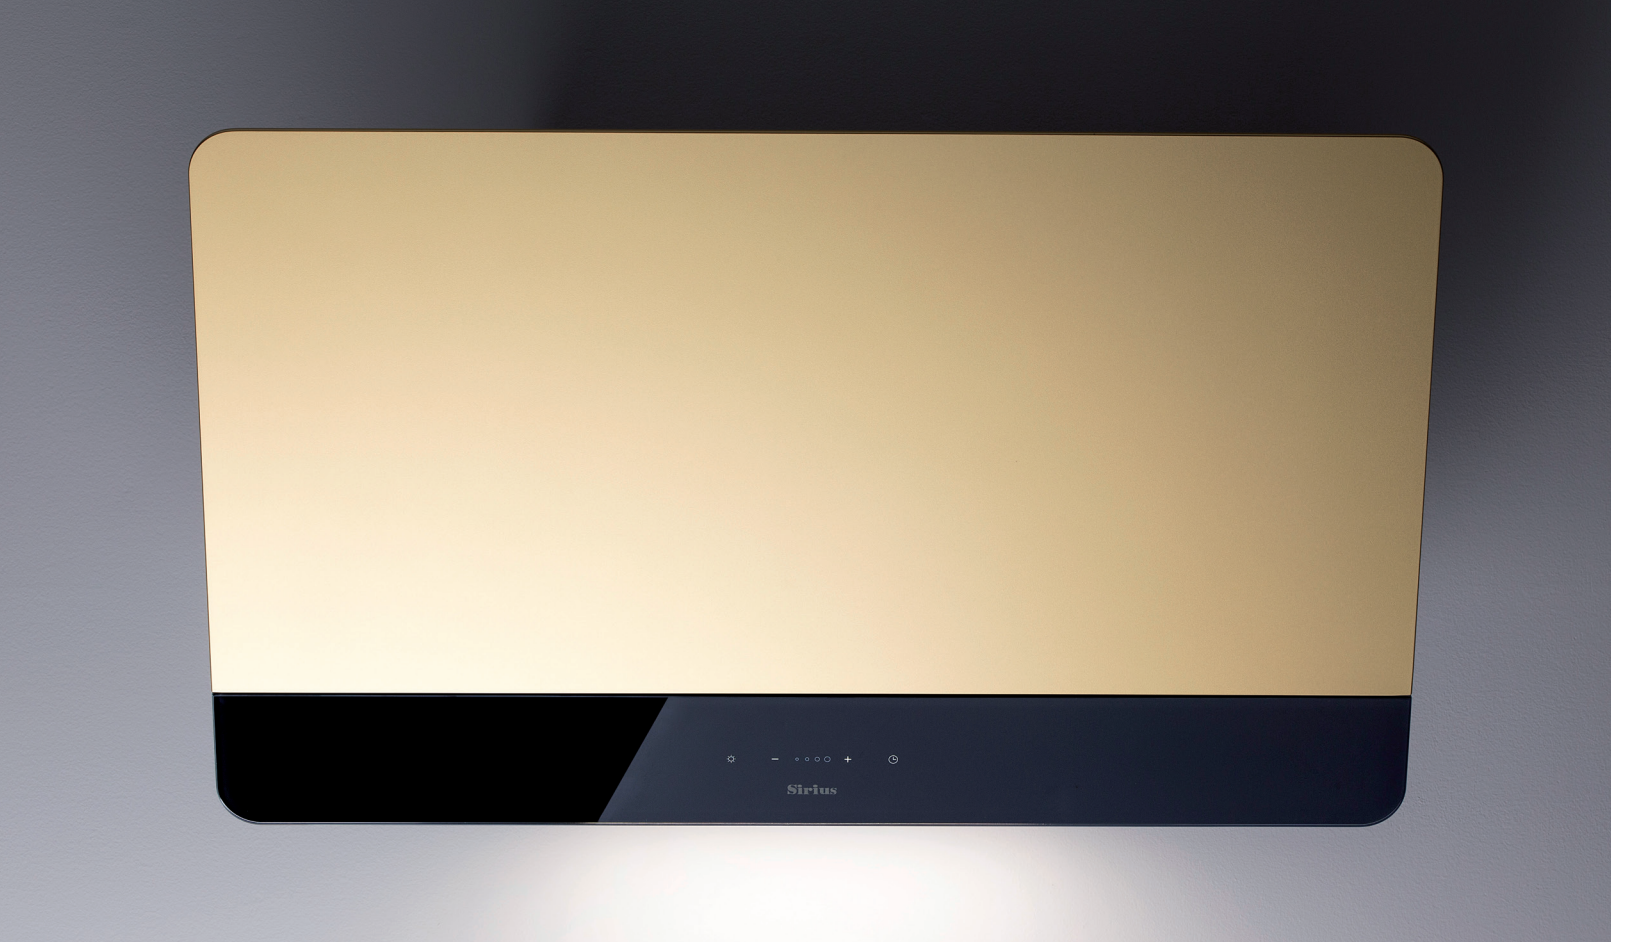

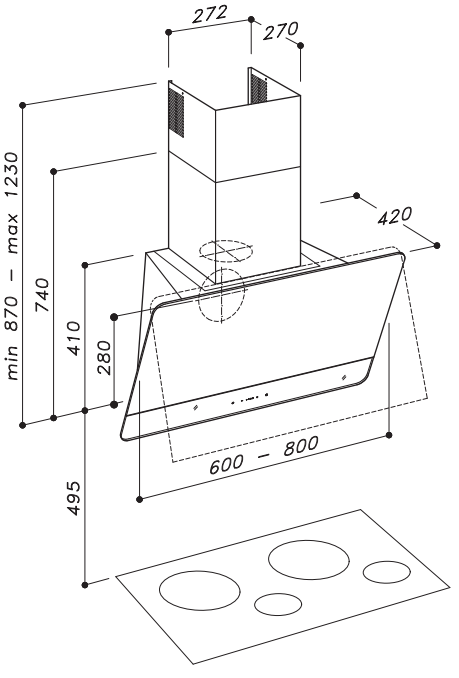

Motor on board:
Top or back vented
Lighting:
3,75W Dimmable and dynamic Led bar (2700 to 6500°K)
Control panel:
Touch Control 4 speeds + light switch + timer
Filter:
Anodized aluminum (5+1 layers)
Material:
Painted stainless Steel AISI430 and glass
Finishing:
Upper glass Gold or Black painted

product	dim.	motor	model identifier	EEC
SLTC93	600	on-board	P093060TC1284022	A
SLTC93	800	on-board	P093080TC1284022	A

SKINNY SLTC 93




JEEG SLTC 97 S.A.M.S.




Available with S.A.M.S. System
see page 10



Motor on board:
Top or back vented
Lighting:
2 x 3,75W Dimmable and dynamic Led bar (2700 to 6500°K)
Control panel:
Touch Control 4 speeds + light switch + timer
Touch control 4 speeds+light switch+timer+Air Management System (SLTC97 S.A.M.S.)
Filter:
Stainless steel and anodized aluminum (5+1 layers)
Material:
Painted stainless steel and smoked glass
Finishing:
Black, White

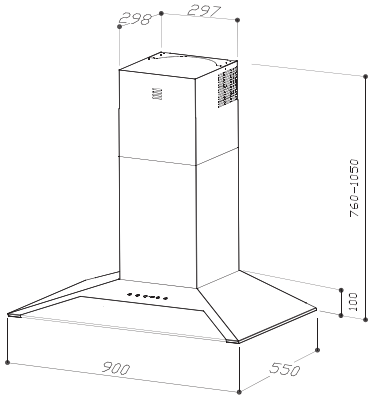

SLTC 97 S.A.M.S

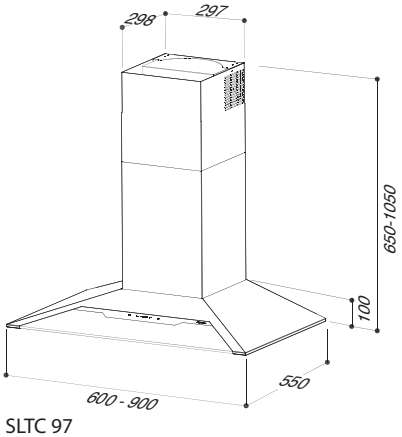

SLTC 97


product	dim.	motor	model identifier	EEC
SLTC97	600	on-board	P097060TC1284075	A
SLTC97	900	on-board	P097090TC1284002	A+

JEEG SLTC 97



SLTC 122



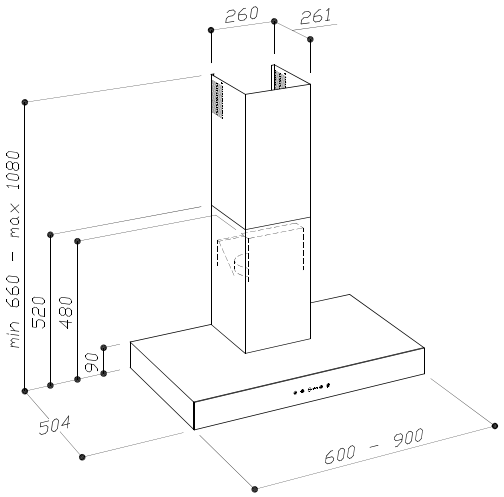

ANTI-DROP SYSTEM

Motor on board

Lighting:

2x3,75W Dimmable and dynamic Led bar (2700 to 6500°K) 90cm version

1x3,75W Dimmable and dynamic Led bar (2700 to 6500°K) 60cm version

Control panel:

Touch Control 4 speeds + light switch + timer + Antidrop System

Filter:

Anodized aluminum (5+1 layers)

Material:

Stainless Steel AISI430

Finishing:

Inox

Dark anthracite painted (PVD effect)

Dimension:

90cm


60cm

product	dim.	motor	model identifier	EEC
SLTC 122	600	on-board	P122060TA1284485	A+
SLTC 122	900	on-board	P122090TA1284437	A+



SLTC 92



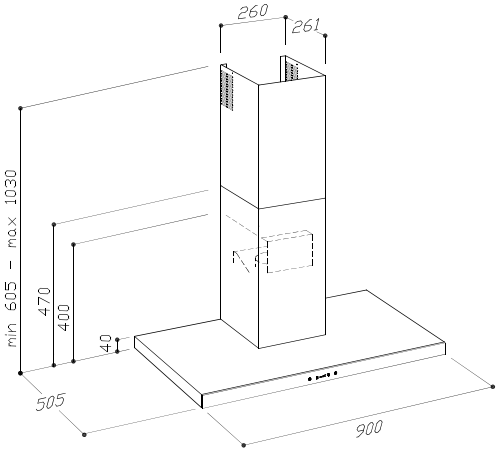

product	dim.	motor	model identifier	EEC
SLTC92	900	on-board	P092090TC1284037	A

Motor on board

Lighting:

2x3,75W dimmable and dynamic Led bar (2700 to 6500°K)

Control panel:

Touch Control 4 speeds + light switch + timer

Grease filter:

Baffle filter AISI430

Material:


Stainless steel AISI 430 and glass

Finishing:

Black glass

SL 92



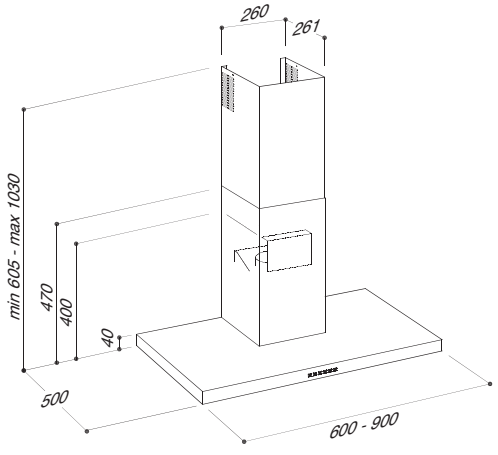

Motor on board

Lighting:

2x3,75W dimmable and dynamic Led bar (2700 to 6500°K)

Control panel:

Chromed 4 speeds push-button+light switch+timer

Grease filter:

Baffle filter AISI430

Material:

Stainless steel AISI 430

product	dim.	motor	model identifier	EEC
SL92	600	on-board	P092060PB1284037	A
SL92	900	on-board	P092090PB1284037	A

SL107

Motor on board

Lighting:

2x3,75W dimmable and dynamic Led bar (2700 to 6500°K)

Control panel:

Chromed 4 speeds push-button+light switch+timer (SL107 version)

Touch Control 4 speeds + light switch + timer (SLTC107 version)

Filter:


commercial style baffle filters AISI304
with oil collector


Material:

Stainless steel AISI304 (SL107 version)

Staniless steel AISI430 and glass panel (SLTC107 version)



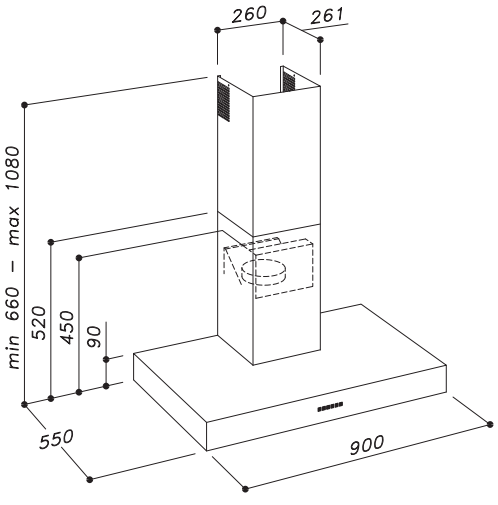



oil collector


product	dim.	motor	model identifier	EEC
SL107	900	on-board	P107090PB1280144	A+
SLTC107	900	on-board	P107090TC1284044	A+

SLTC 107



SLTC 90



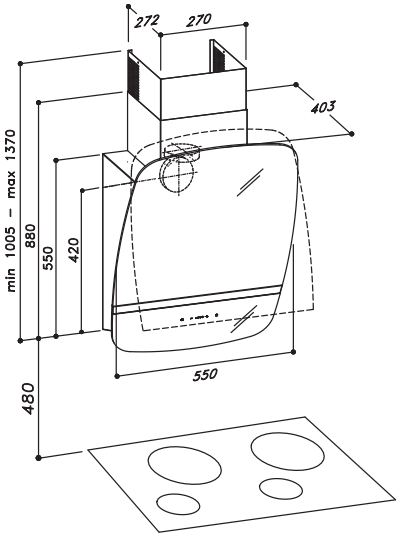


product	dim.	motor	model identifier	EEC
SLTC90	550	on-board	P090055SL1020113	A

Motor on board:
Top or back vented
Lighting:
1x6,5W Led Strip
Control panel:
Touch Control 4 speeds + light switch + timer
Grease filter:
Anodized aluminum (5+1 layers)
Material:
Stainless steel AISI 430 and glass
Finishing:
White glass
Black glass

SLTC 91



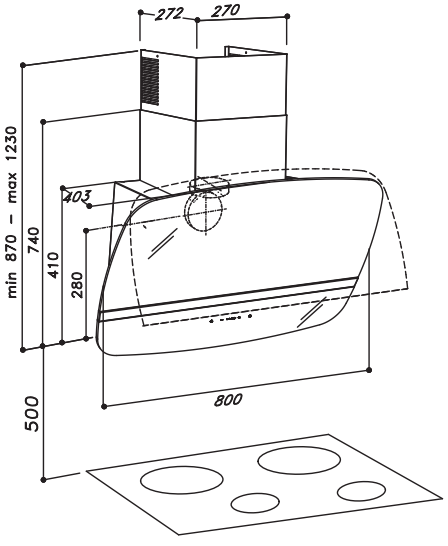


product	dim.	motor	model identifier	EEC
SLTC91	800	on-board	P091080SL1020122	A

Motor on board:
Top or back vented
Lighting:
1x6,5W Led Strip
Control panel:
Touch Control 4 speeds + light switch + timer
Grease filter:
Anodized aluminum (5+1 layers)
Material:
Stainless steel AISI430 and glass
Finishing:
White glass
Black glass

SL109



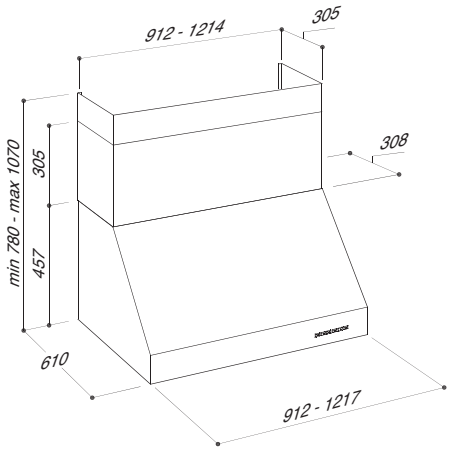

product	dim.	motor	model identifier	EEC
SL109	900	on-board	P109090PB1034044	A
SL109	1200	2 Mot on-board	P109120PB2034045	B

Motor on board

Lighting:

2x3,75W Dimmable and dynamic led bar (2700 to 6500°K)

Control Panel:

Chromed 4 speeds push-button+light switch+timer

Grease filter:

Commercial style baffle filters AISI304 with oil collector

Material:

Stainless steel AISI304

Finishing:


Stainless steel



oil collector

Upper and lower chimneys to be purchased separately



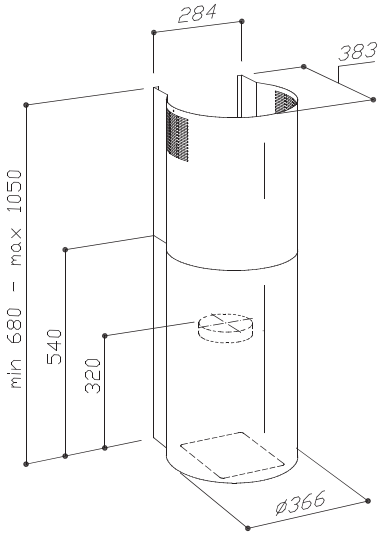

MO 209

Motor on board

Lighting:

2 Led spot 2,5W 4000°K

Control Panel:

Remote Control

Grease filter:

Anodized aluminum (5+1 layers)

Material:

Stainless steel AISI430


Finishing:


Stainless steel

Matt white painted

Matt black painted

product	dim.	motor	model identifier	EEC
MO209		on-board	P209037RC1283685	A

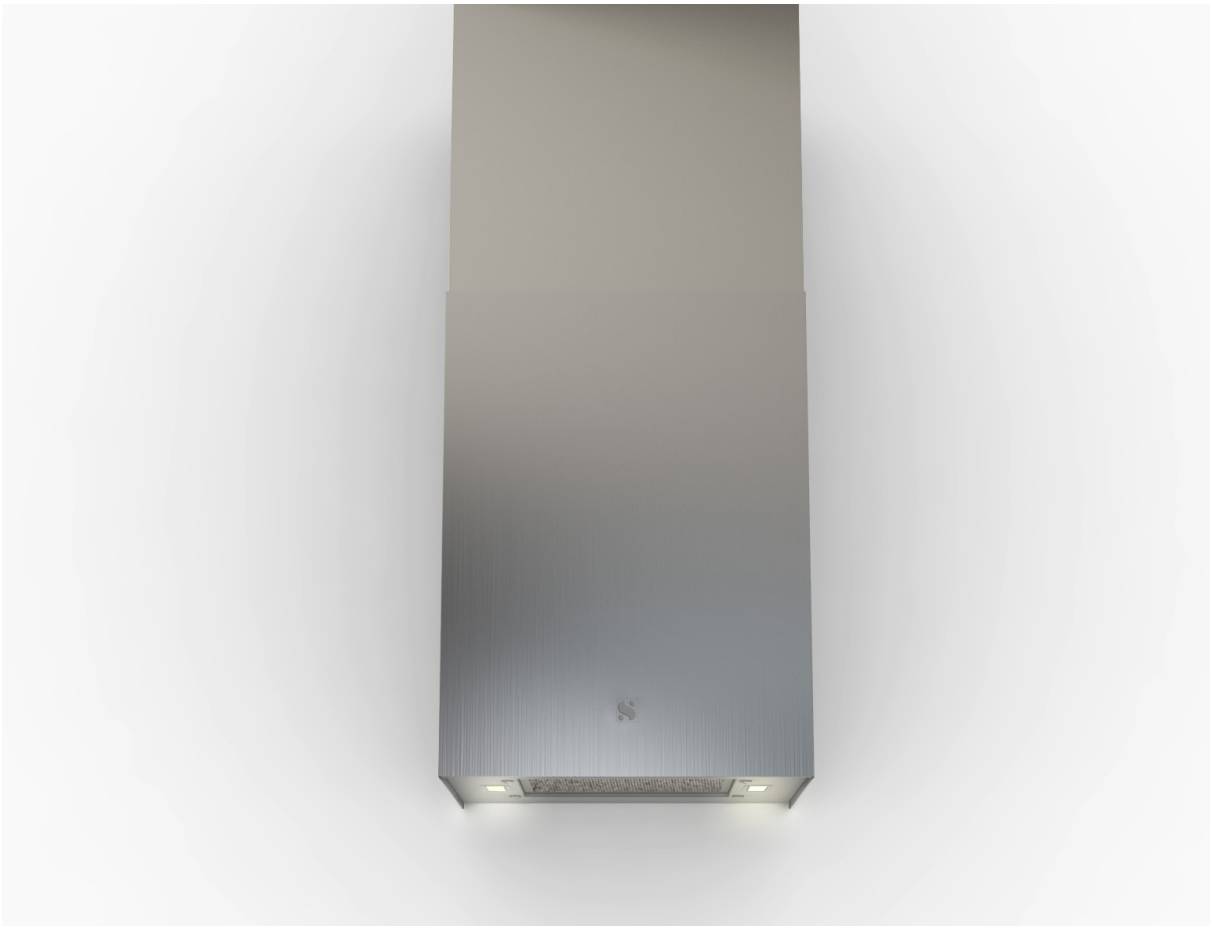

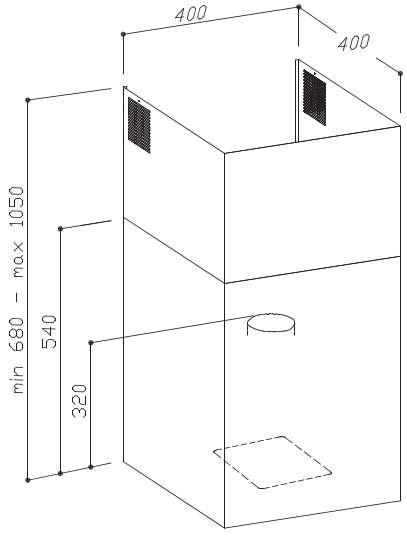

MO 210

Motor on board

Lighting:

2 Led spot 2,5W 4000°K

Control Panel:

Remote Control

Grease filter:

Anodized aluminum (5+1 layers)

Material:

Stainless steel AISI430

Finishing:

Stainless steel

Matt white painted

Matt black painted

product	motor	model identifier	EEC
MO210	on-board	P210040RC1283685	A





BUILT-IN

Built-in hoods designed to be perfectly integrated into kitchen projects where you don’t want to interrupt the continuity and design of the kitchen cabinets, guaranteeing maximum extraction efficiency.

SUPERHERO SL 930 AUTOMATIC



ARTIFICIAL INTELLIGENCE SYSTEM - AIS

This innovative system, patented by Sirius, is made up of sensors and technologically advanced electronic devices working in synergy.
As you start cooking, the range hood autonomously activates and adjusts the suction power, by detecting constantly both the temperature and air quality while cooking.
This innovative technology allows an autonomous and automatic operation of products and is completely independent from the kind of hob you use (gas, induction, etc.).



Motor on board

Lighting:

2X3,75W Dimmable and dynamic Led bar (2700 to 6500°K)

Control panel:

Fully automatic operating system
Chromed 4 speeds push-button + light switch +timer
App
Voice assistant

Filter:

Anodized aluminum (4+1 layers)


Finishing:

Matt white painted

Installation:

Cut Out:

Create a niche in the cabinet for 830x270mm

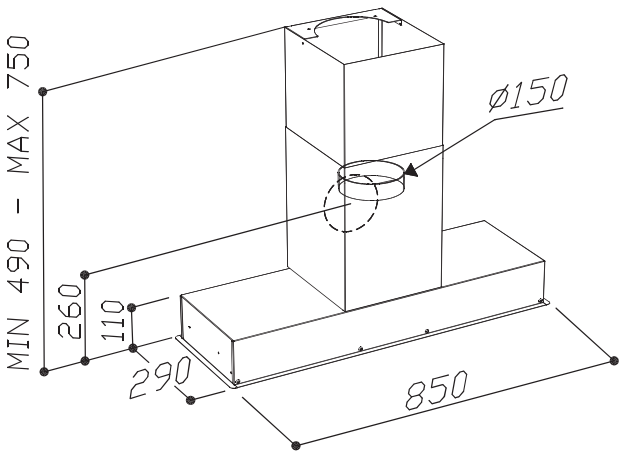


product	dim.	motor	model identifier	EEC
SLTC930	850	on-board	G930085RA1284087	A

WING SLTC 919

Motor on board:
Top or back vented
Lighting:
1X6W Dimmable and dyamic Led bar (2700 to 6500°) (SLTC919 85cm version)
1x3,75W Dimmable and dynamic Led bar (2700 to 6500°K) (SLTC919 52cm version)
Control Panel:
Touch control 4 speeds+light switch+timer
Grease filter:
Anodized aluminum (5+1 layers)
Material:
Stainless steel AISI430 and glass

Installation:
Cut Out:
Create a niche in the cabinet for
498x265mm (52cm version)
828x265mm (85cm version)



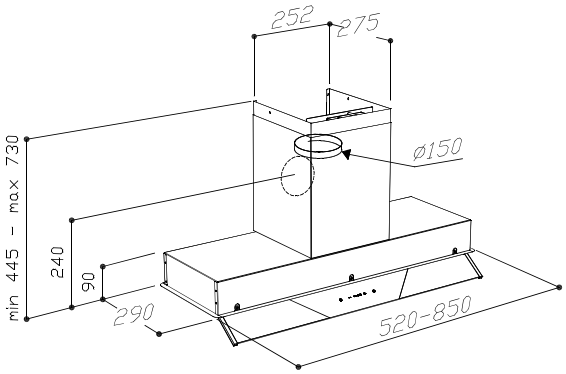



product	dim.	motor	model identifier	EEC
SLTC 919	520	on-board	G919T52TC1284466	A
SLTC 919	850	on-board	G919T85TC1284567	A





SL 906-L

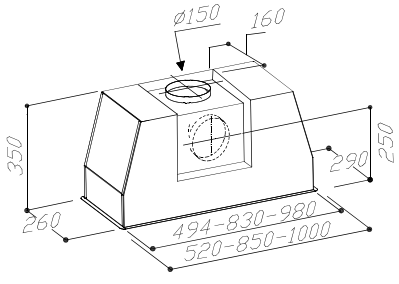



oil collector


product	dim.	motor	model identifier	EEC
SL 906-L	520	on-board	G906052PB1284052	A
SL 906-L	850	on-board	G906085PB1284153	A
SL 906-L	1000	on-board	G906100PB1282749	A


Motor on board:
Top or back vented
Lighting:
1x3,75W Dimmable and dynamic Led bar (2700 to 6500°K) (52 cm version)
1x6W Dimmable and dynamic Led bar (2700 to 6500°K) (85 version)
2x3,75W Dimmable and dynamic Led bars (2700 to 6500°K) (100cm version)
Control Panel:
Chromed 4 speeds push-button+light switch+timer
Grease filter:
Commercial style baffle filters AISI304 with oil collector
Material:
Stainless steel AISI430

Installation:
Cut Out:
Create a niche in the cabinet for
498x265mm (52cm version)
835x265mm (85cm version)
985x265mm (100cm version)




SL 909

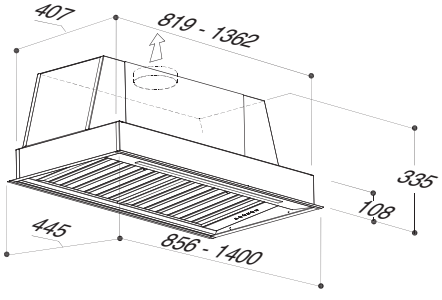

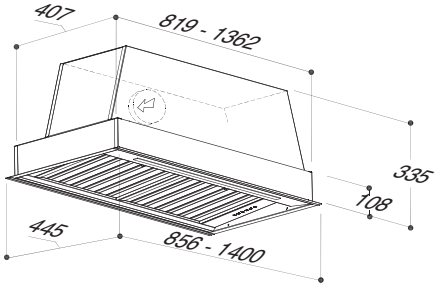

product	dim.	motor	model identifier	EEC
SL 909	856	on-board	G909086PB1284148	A
SL 909	1400	on-board	G909140PB1284048	A+

Motor on board:
Top or back vented
Lighting:
1X6W Dimmable and dynamic Led bar (2700 to 6500°K) (85cm version)
2X3,75W Dimmable and dynamic Led bar (2700 to 6500°K) (140cm version)
Control Panel:
Chromed 4 speeds push-button+light switch+timer
Grease filter:
Commercial style baffle filters AISI304 with oil collector
Material:
Stainless steel AISI430



oil collector


Installation:
Cut Out:
Create a niche in the cabinet for
825x410mm (SL 909 85cm version)
1365x410mm (SL 909 140cm version)

SLTC 928



Motor on board:
Top or back vented
Lighting:
1x3,75W Dimmable and dynamic Led bar (2700 to 6500°K) (60 cm version)
1x6W Dimmable and dynamic Led bar (2700 to 6500°K) (90cm version)
2x3,75W Dimmable and dynamic Led bar (2700 to 6500°K) (120cm version)
Control Panel:
Touch control 4 speeds+light switch+timer
Grease filter:
Anodized aluminium (5+1layers)
Material:
Stainless steel AISI430

Easy installation:
No need to cut out
Directly installed in the cabinet through guides

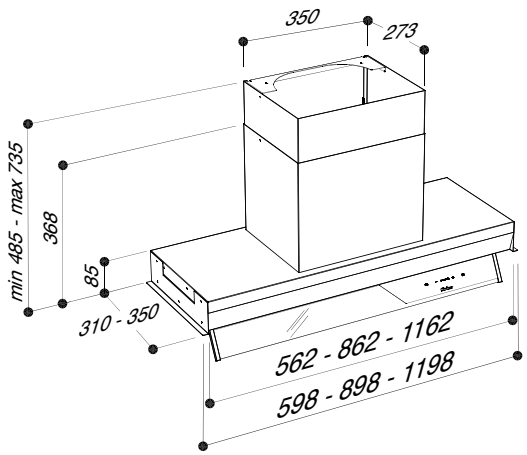

product	dim.	motor	model identifier	EEC
SLTC 928	600	on-board	G928060TC1014066	A
SLTC 928	900	on-board	G928090TC1014084	A
SLTC 928	1200	on-board	G928120TC1014166	A



TEA
TEA
TEA
TEA
Siemens



SL 927 ANTIDROP

Motor:
on board
Lighting:
1x3,75W Dimmable and dynamic Led bar (2700 to 6500°K) (SL927 52cm)
1x6W Dimmable and dynamic Led bar (2700 to 6500°K) (SL927 85cm)
Control Panel:
Chromed 4 speeds push-button + light switch + timer + Anti-drop System
Grease filter:
Anodized aluminum (5+1layers)
Material:
Painted stainless steel and glass panel
Finishing:
Black / White
Dimension: 52-85cm

Installation:
Cut Out:
Create a niche in the cabinet for
505x270mm (SM927 52cm version)
835x270mm (SM927 85cm version)

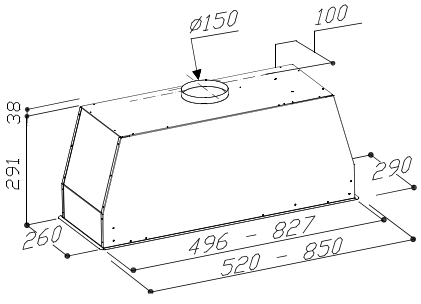




ANTI-DROP SYSTEM

product	dim.	motor	model identifier	EEC
SM927Ant.	520	on-board	G927052PB1014427	B
SM927Ant.	850	on-board	G927085PB1014578	A



SM 927


Motor:
on board
Lighting:
1x6,5W Led strip (SM927 52cm version)
1x10,5W Led strip (SM927 85cm version)
Control Panel:
4 speeds push-button+light switch
Grease filter:
Anodized aluminum (5+1layers)
Material:
Painted stainless steel and glass panel
Finishing:
Black / White

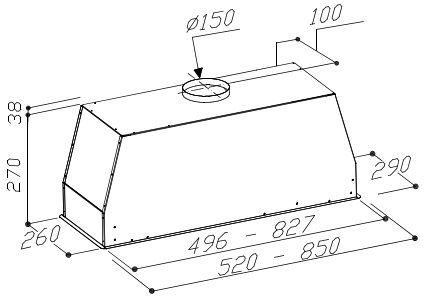


Installation:
Cut Out:
Create a niche in the cabinet for
505x270mm (SM927 52cm version)
835x270mm (SM927 85cm version)



SL 913

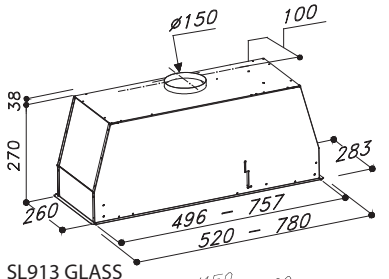

SL913 GLASS

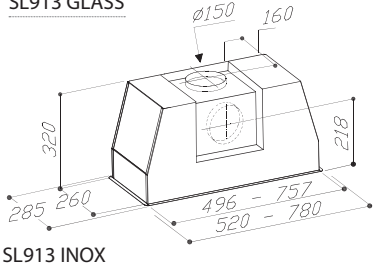

SL913 INOX

product	dim.	motor	model identifier	EEC
SL 913	520	on-board	G913052PB1284427	A
SL 913	780	on-board	G913078PB1284527	A

Motor on board

Lighting:
1x3,75W Dimmable and dynamic Led bar (2700 to 6500°K) (52 cm version)
1x6W Dimmable and dynamic Led bar (2700 to 6500°K) (78 cm version)

Control Panel:
Chromed 4 speeds push-button+light switch+timer

Grease filter:
Anodized aluminum (5+1layers)


Material:
Stainless steel
Glass

Finishing:
White painted and white glass panel (SL913 glass version)
Stainless steel (SL913 inox version)


Installation:
Cut Out:
Create a niche in the cabinet for
502x265mm (SL913 52cm version)
764x265mm (SL913 78cm version)



SL 903-P

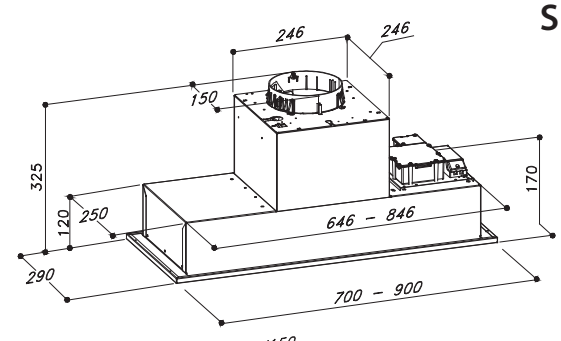

motor on board

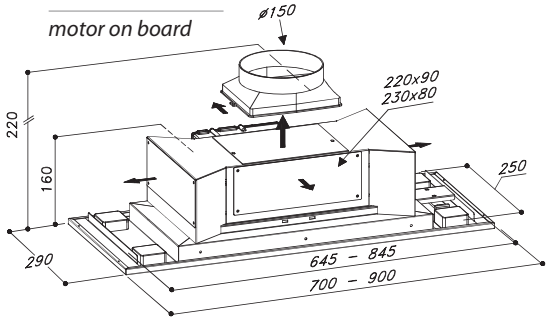

external motor


product	dim.	motor	model identifier	EEC
SL 903-P	700	on-board	G903070PB1280541	A
SL 903-P-EM	700	SEM1	G903070PB1290541	B
SL 903-P-EM	700	SEM2	G903070PB1150541	C
SL 903-P	900	on-board	G903090PB1280541	A
SL 903-P-EM	900	SEM1	G903090PB1290541	B
SL 903-P-EM	900	SEM2	G903090PB1150541	C

Motor:
motor on board or external motor version (to be purchased separately)
Lighting:
4x2,1W Led spotlight
Control Panel:
Chromed 4 speeds push-button+light switch+timer
Grease filter:
Anodized aluminum (5+1 layers)
Material:
Stainless steel AISI430

Installation:
Cut Out:
Create a niche in the cabinet for
649x255mm (SL903 70cm version)
849x255mm (SL903 90cm version)



SM 923-L

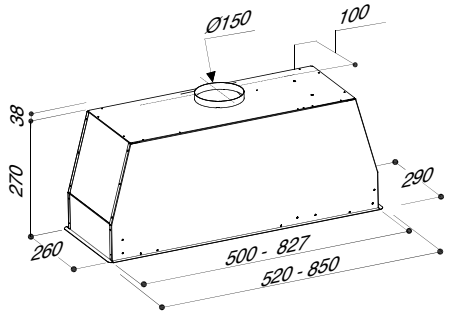


product	dim.	motor	model identifier	EEC
SM923-L	520	on-board	G923052PB1013580	A
SM923-L	850	on-board	G923085PB1013382	A

Motor:
on board
Lighting:
Led strip 1x6,5W (SM923 52cm version)
Led strip 1x10,5W (SM923 85cm version)
Control Panel:
4 speeds push-button+light switch+timer
Grease filter:
Anodized aluminum (5+1 layers)
Material:
Stainless steel AISI430
Installation:
Cut Out:
Create a niche in the cabinet for
270x505mm (SM923 52cm version)
270x835mm (SM923 85cm version)



SL - SM 900

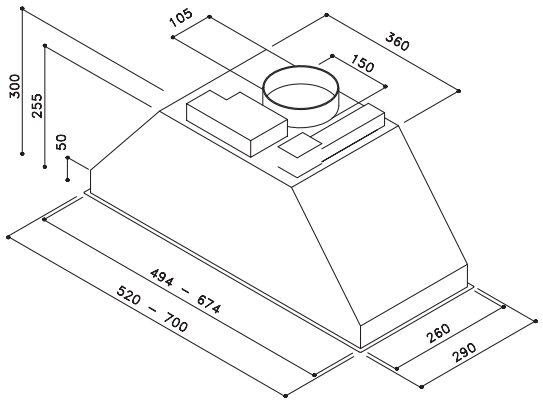

product	dim.	motor	model identifier	EEC
SM 900	520	on-board	G900052PB1010657	B
SM 900	700	on-board	G900070PB1010657	B
SL 900	520	on-board	G900052PB1280657	A
SL 900	700	on-board	G900070PB1280657	A

Motor on board

Lighting:

2x2,1W Led spotlight

Control Panel:

Chromed 4 speeds push-button+light switch+timer (SL version)

4 speed push-button+light switch+timer (SM version)

Grease filter:

Anodized aluminum (5+1 layers)

Material:

Stainless steel AISI430

Installation:

Cut Out:


Create a niche in the cabinet for

495x272mm (SL900 52cm version)

675x272mm (SL900 70cm version)



SL 907

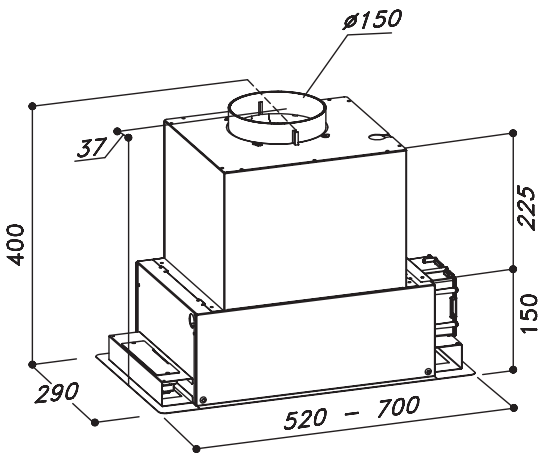

Motor on board
Lighting:
Led panel 1x4W (SL907 52cm version)
Led panel 1x11W (SL907 70cm version)
Control Panel:
Chromed 4 speeds push-button+light switch+timer
Grease filter:
Anodized aluminum (5+1layers)
Material:
Stainless steel AISI430

Installation:
Cut Out:
Create a niche in the cabinet for
270x498mm (SL907 52cm version)
270x675mm (SL907 70cm version)

product	dim.	motor	model identifier	EEC
SL 907	520	on-board	G907052PB1285559	A
SL 907	700	on-board	G907070PB1285646	A






VENTED INDUCTION HOBS

The vented induction hobs are born from the perfect combination between an induction hob and an extractor hood. Sirius offers vented hobs with minimal designs and high technology and functionality in a single appliance.

DNA SDDH9






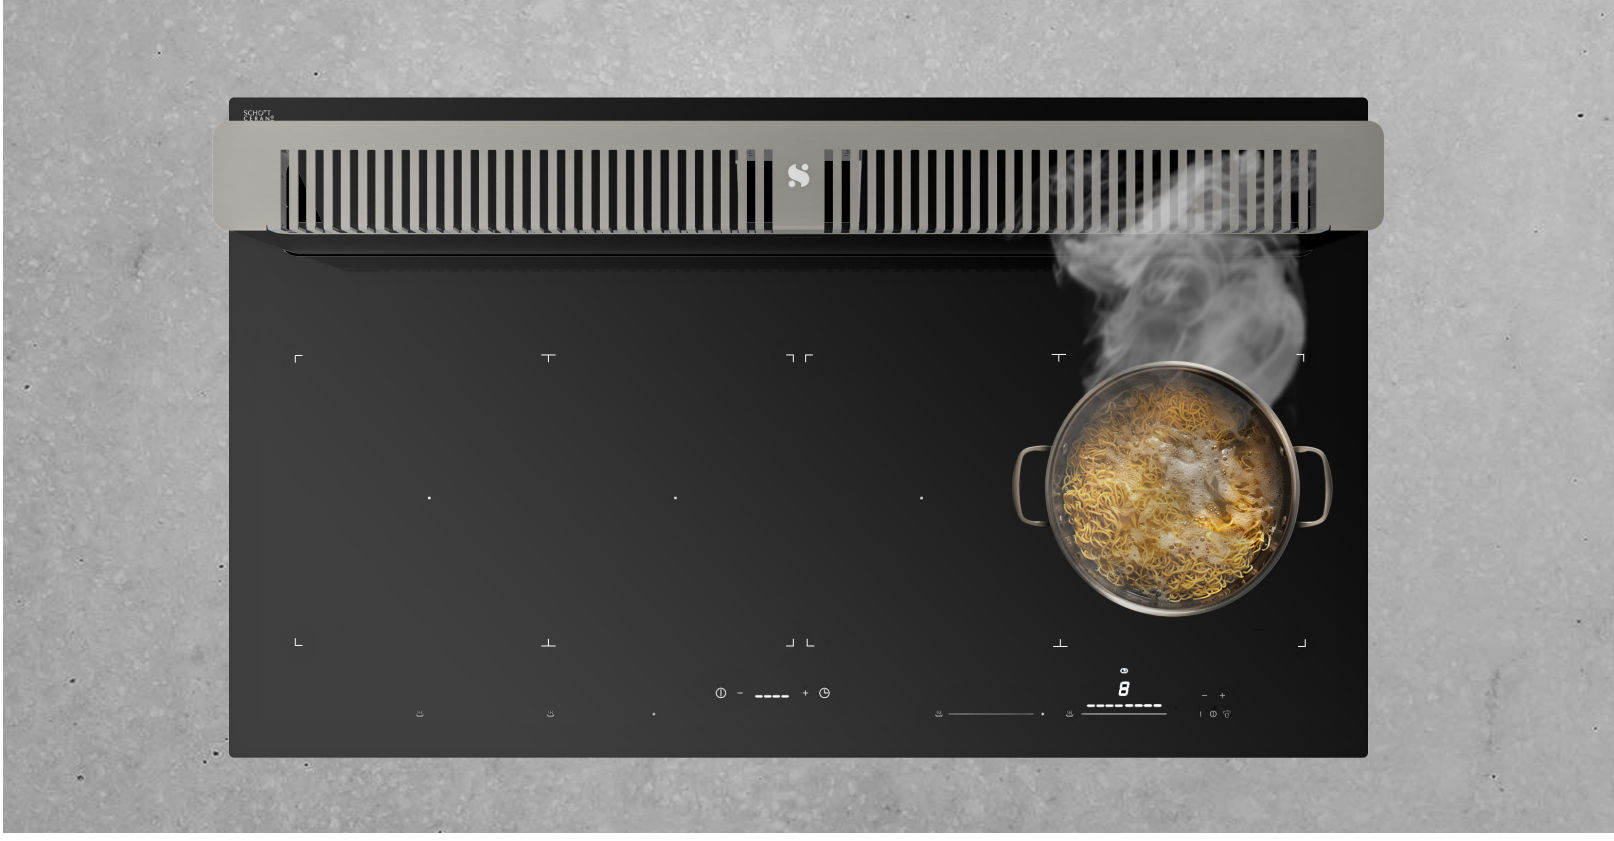

Motor:
Brushless Motor on board
Control panel:
Touch control 4 speeds + timer integrated on the induction hob (White led)
Filter:
Black aluminium filter
Finishing:
Stainless steel metallic grill

Hob Specifications
Ego G5 induction technology
Schott Ceran Luminoir black glass
White led Touch controls
Pot Detection
Residual Heat
Power Boost (quick heating) on all zones
Automatic Warm-Up
Special Programs:
- Warming
- Melt
- Simmer
Chef Cook
Timer
Egg Timer/Reminder
Child Safety Lock
Over-heating operation
"Keep Warm" function
Pause and recall functions
Bridge (Flexible cooking zones)
Cooking output
4 zones (Octa 180x220mm 2100W) Max 3700W
Max power 7,4 kW
Electric rating 220-240V (50/60 Hz)

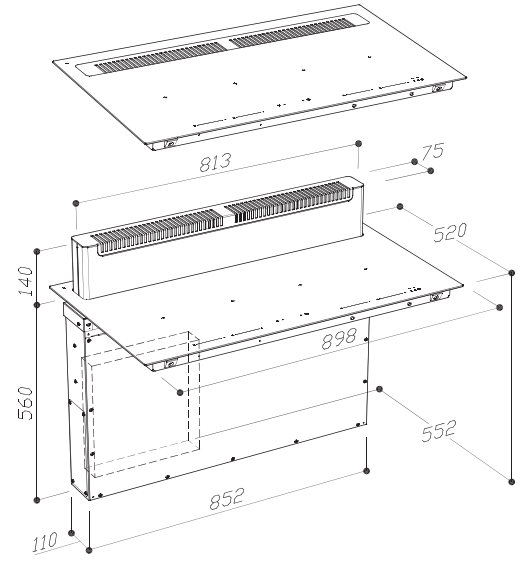

Installation
Cut Out:
Create a niche in the countertop using the following dimensions:
860x490mm

product	dim.	motor	model identifier	EEC
S-DDH9	900x520	on board	D009090TC141XX88	A+++





SYNTHESIS SDDH6 78 CM




Motor:
Flat Motor on board
Control panel:
Touch control 4 speeds + timer integrated on the induction hob (White led)
Material:
Black painted metallic grill

Hob Specifications
Ego G5 induction technology
Schott Ceran Luminoir black glass
White led Touch controls
Pot Detection
Power Boost (quick heating) on all zones
Automatic Warm-Up
Special Programs:
- Warming
- Melt
- Simmer
Chef Cook
Timer
Egg Timer/Reminder
Child Safety Lock
Over-heating operation
"Keep Warm" function
Pause and recall functions
Bridge (Flexible cooking zones)
Cooking output
4 zones (Octa 180x220mm 2100W) Max 3700W
Max power 7,4 kW
Electric rating 220-240V (50/60 Hz)

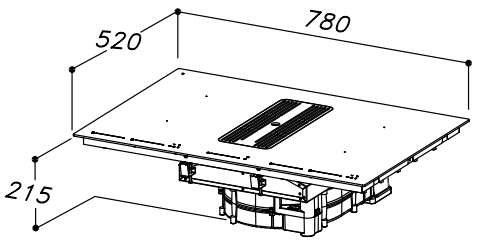

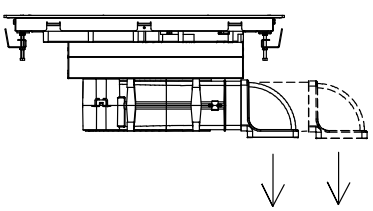



product	motor	model identifier	EEC
SDDH6 BRH	on board	D006078TC135XX79	A+

Installation
Cut Out:
Create a niche in the countertop using the following dimensions:
760x490mm



Sirius


SYNTHESIS SDDH6 60 CM




Motor:
Flat Motor on board
Control panel:
Touch control 4 speeds + timer integrated on the induction hob (White led)
Material:
Black ceramic glass
Black painted metallic grill

Hob Specifications
Ego B4 induction technology
Schott Ceran Luminoir black glass
White led Touch controls
Automatic switch off
Residual Heat Indication
Overheating
Supervision for permanent key activation
Pause-Recall function key
Key-lock function
Timer function
Warming function
Stand-alone timer function
Child Lock
Heat-Up Automatic
Bridge function
Booster function on all zones
4 zones (Octa 210x190 2100W) Max 3000W
Max power 7,4 kW
Electric rating 220-240V (50/60 Hz)

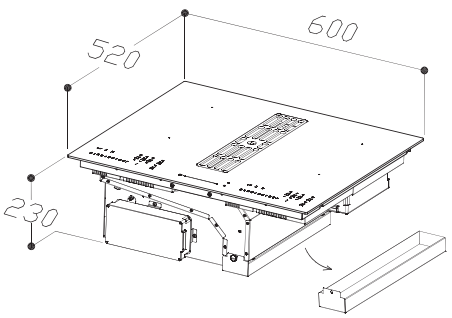





product	dim.	motor	model identifier	EEC
S-DDH6	600x520	on board	D006060TC142XX89	B


Installation
Cut Out:
Create a niche in the countertop using the following dimensions:
560x490mm

SENSE



Lighting
1x1,4W Dimmable and dynamic Led spot (2700K to 6500K)
Material
Ceramic
Finishing
Ceramic Shell: Handmade ceramic black or white matt painted

Inside the ceramic lamp SENSE, the technological system patented by Sirius.
This can match the Synthesis vented induction hob, assuring both a proper lighting and the maximum energy comfort.
The sensors and electronically advanced devices detect air quality and the temperature produced while cooking, automatically activating the suction of the vented induction hob.

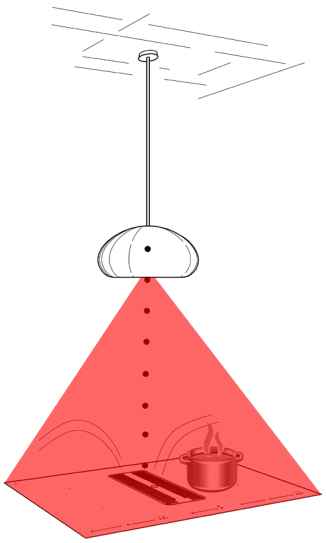




SHADOW SDDH5






Motor:
Brushless Motor on board
Control panel:
Touch control 4 speeds + timer integrated on the induction hob (White led)
Filter:
Black aluminium filter
Material
Schott Ceran Luminoir black glass

Hob Specifications
Ego G5 induction technology
Schott Ceran Luminoir black glass
White led Touch controls
Pot Detection
Residual Heat
Power Boost (quick heating) on all zones
Automatic Warm-Up
Special Programs:
- Warming
- Melt
- Simmer
Chef Cook
Timer
Egg Timer/Reminder
Child Safety Lock
Over-heating operation
"Keep Warm" function
Pause and recall functions
Bridge (Flexible cooking zones)
Cooking output
4 zones (Octa 180x220mm 2100W) Max 3700W
Max power 7,4 kW
Electric rating 220-240V (50/60 Hz)

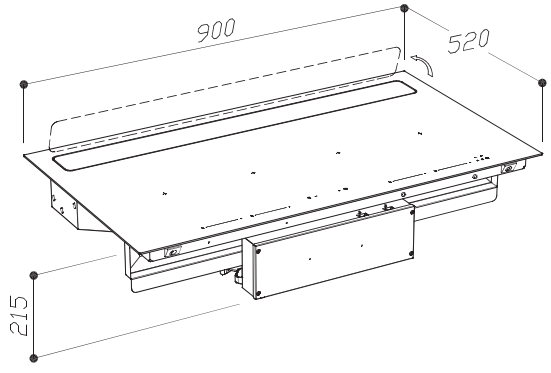

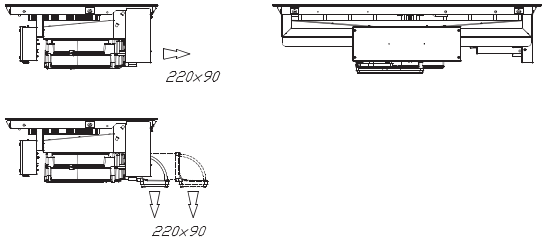

product	motor	model identifier	EEC
SDDH5 BRH	on board	D005090TC135XXXX	A+


Installation
Cut Out:
Create a niche in the countertop using the following dimensions: 860x490mm

SDDH 1






Motor:
motor on board or external motor version (to be purchased separately)
Lighting:
1x5 W LED strip
Control panel:
Touch Control 4 speeds+light switch+timer integrated on the Induction Hob
Filter:
anodized aluminum (4+1 layers)
Material:
Stainless steel
Hob Specifications
Induction G5
Beveled edges black glass
Automatic heat-up function
Safety Lock
Timer function
Over-heating operation
"Keep Warm" function
Pause and recall function
Bridge function
Touch controls
Booster function on all zones
Cooking output
4 zones 184x220mm 2100W; Power 3700W
Max power 7,4 kW
Electric rating 220-240V (50/60 Hz)
Cut out:
Create a niche in the countertop using the following dimensions: 860x490mm

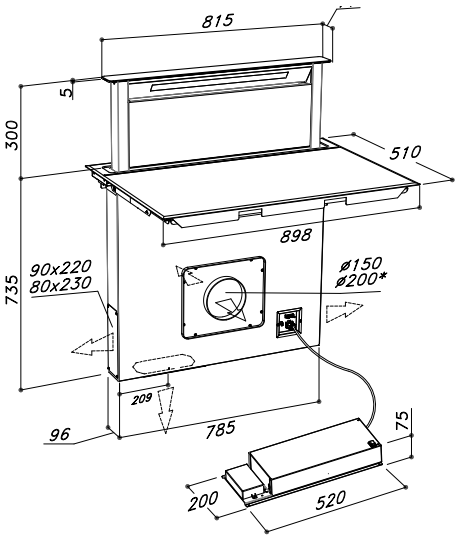

External Motor

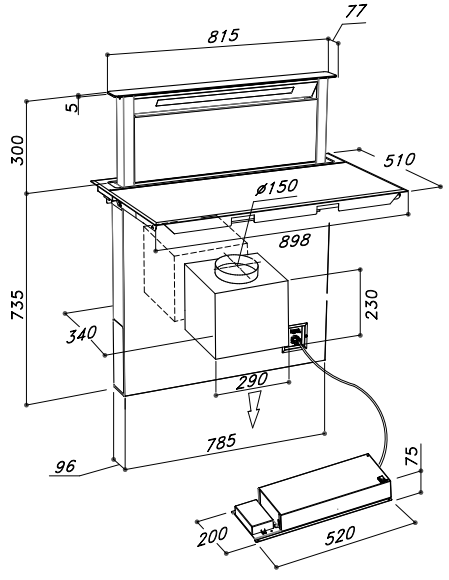


Motor on board


product	dim.	motor	model identifier	EEC
S-DDH1	900x510	on board	D009088TC1292415	A
S-DDH1 EM	900x510	SEM1	D009088TC1142415	B
S-DDH1 EM	900x510	SEM 2	D009088TC1152415	C
S-DDH1 EM	900x510	SEM 8	D009088TC1172415	C
S-DDH1 EM	900x510	SEM 10	D009088PB1302415	C
S-DDH1 EM	900x510	SEM 12	D002088PB1312415	A

INSTALLATION SCHEMES


SYNTHESIS SDDH 6

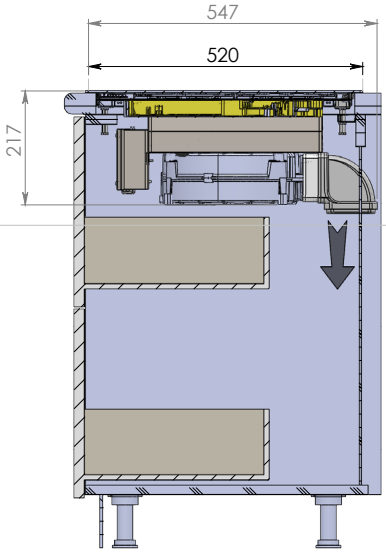



DUCTING VERSION

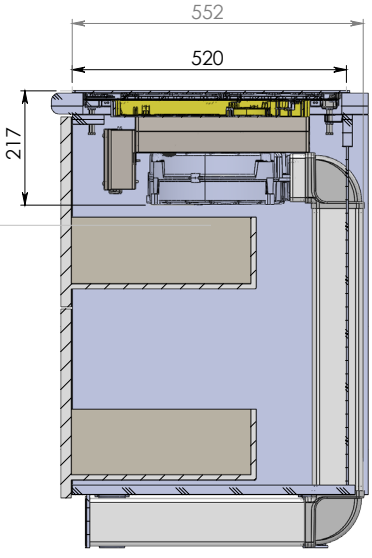


FILTERING VERSION

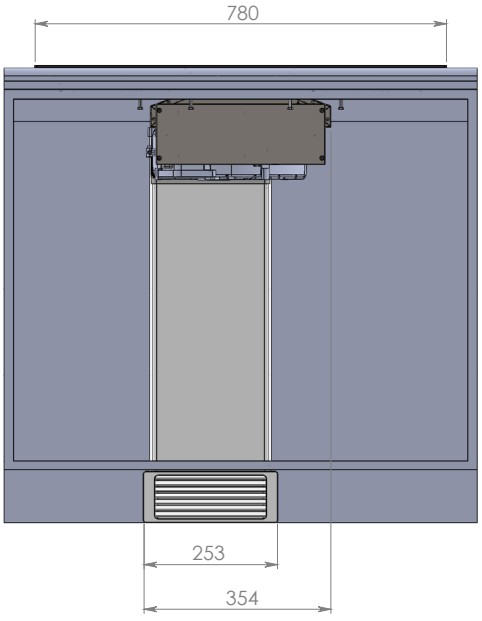


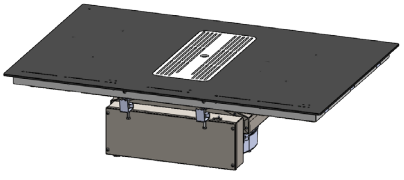

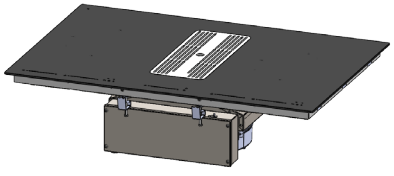

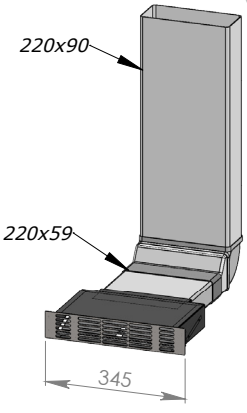


"FILTERING VERSION WITH S-KFHE3" (To be purchased separately, see p. 186)

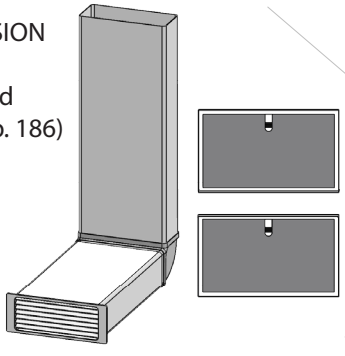


FILTERING KIT SDDH6 BRHM (To be purchased separately)


SHADOW SDDH 5

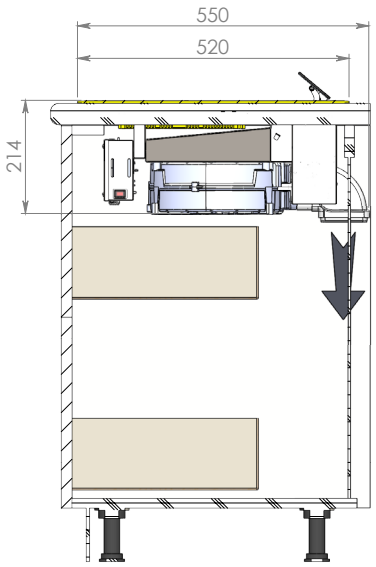


DUCTING VERSION

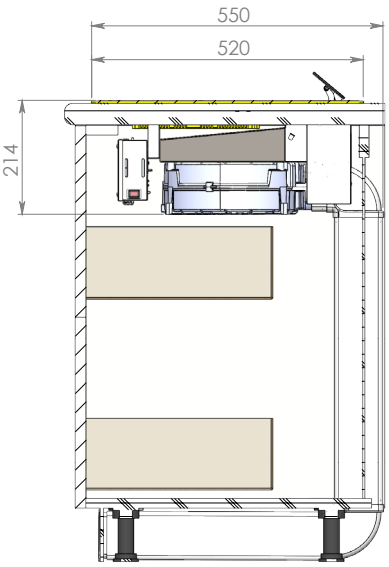

FILTERING VERSION

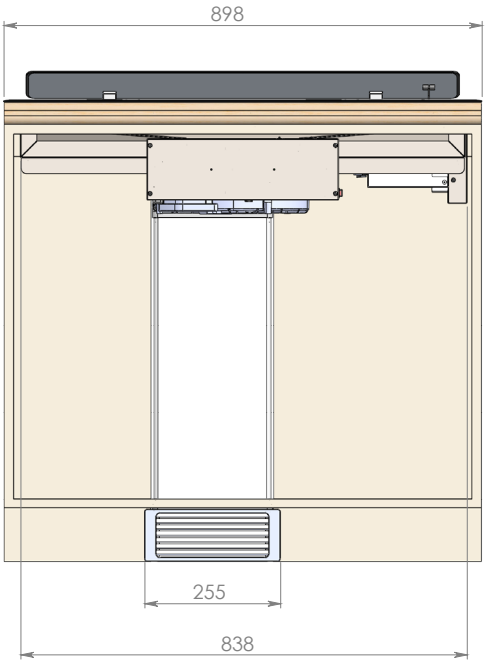


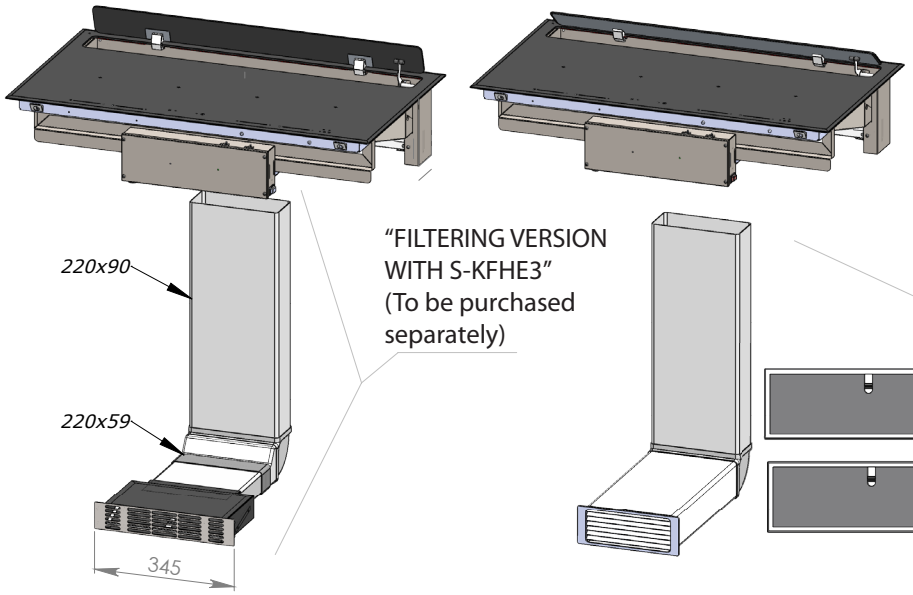



"FILTERING VERSION WITH S-KFHE3" (To be purchased separately)

FILTERING KIT SDDH5 BRHM (To be purchased separately)

SDDH 1 + SEM 10 / SEM 12

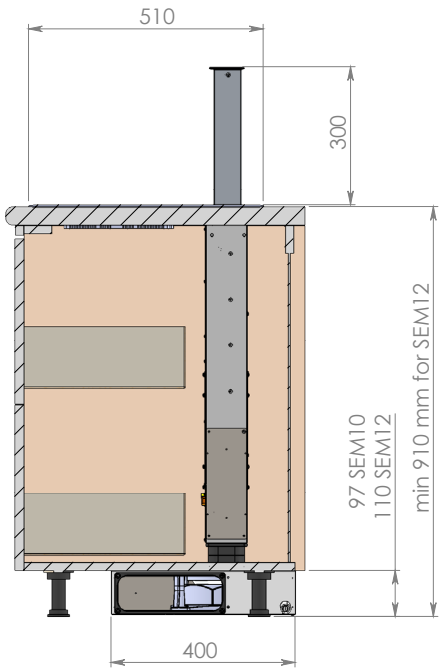

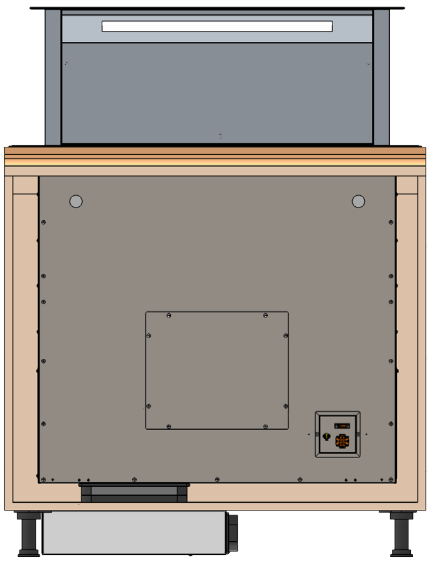


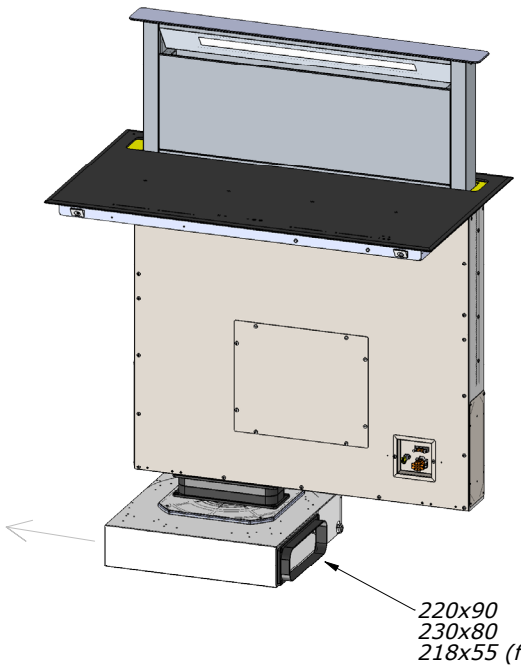


REMOTE MOTORS




SEM1
air inlet:
Ø 150mm









SEM2
air inlet:
Ø 150mm









SEM5
air inlet:
Ø 150mm









SEM7
air inlet:
Ø 200/150mm
BRH: Brushless motor









SEM8
air inlet:
Ø 200/150mm










SEM9
air inlet:
Ø 150mm
BRH: Brushless motor

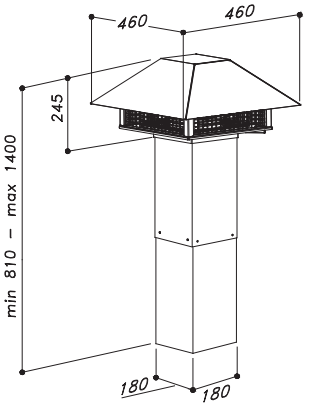








SEM10






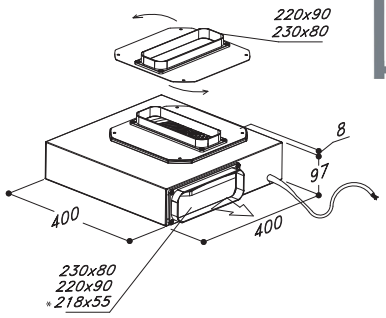



** filtering version*



SEM12
BRH: Brushless motor





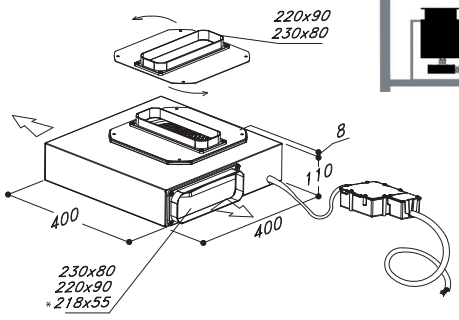


** filtering version*


Have you ever thought about an oven hood?
This is the Sirius solution for removing odors during cooking
and annoying vapors generated by opening the oven.

AEOLUS



Motor on board
Touch Control 2 speeds, timer function, automatic stop
Filter:
Filtering box composed of:
Black painted Anodized aluminum
Washable carbon filter
Zeolite filter
Finishing:
Matt black painted
Black glass front panel

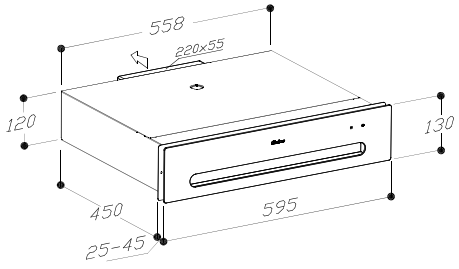

Installation:
Prepare a niche above the oven measuring 560x120mm

Filtering version only





INDUCTION HOBS

INVISIBLE INDUCTION HOBS

S-H7




S-H7 4 zones in line
Ego B4 induction technology
Slider control Smart Kii (Red led)
Booster function
Residual heat indication
Timer function
Stand alone Timer / Cooking zone Timers
Heat-up Automatic
Chef Cook Function
Pause function
Recall function
Control Lock key
Child Lock key
Warming level
Power management
Power settings
Operation Time Limitation
4 zones in line Ø200mm
9 Power Level:1.6 kW
Booster: 1.7 kW
Max power: 6.4 kW


S-H7 5 zones 82x48cm
Ego B4 induction technology
Slider control Smart Kii (Red led)
Booster function
Residual heat indication
Timer function
Stand alone Timer / Cooking zone Timers
Heat-up Automatic
Chef Cook Function
Pause function
Recall function
Control Lock key
Child Lock key
Warming level
Power management
Power settings
Operation Time Limitation
2 zones Ø200mm - 9 Power Level:1.6 kW/Booster: 1.7 kW
2 zones Ø160mm - 9 Power Level: 1.1 kW/Booster: 1.5 kW
1 zone Ø250 - 9 Power Level:1.8 kW/Booster: 2.4 kW
Max power: 7.2 kW

S-H7 4 zones 64x48cm
Ego B4 induction technology
Slider control Smart Kii (Red led)
Booster function
Residual heat indication
Timer function
Stand alone Timer / Cooking zone Timers
Heat-up Automatic
Pause function
Recall function
Control Lock key
Child Lock key
Warming level
Power management
Power settings
Operation Time Limitation
2 zones Ø200mm - 9 Power Level:1.6 kW/Booster: 1.7 kW
2 zones Ø160mm - 9 Power Level: 1.1 kW/Booster: 1.5 kW
Max power: 5.4 kW


S-H7 4 zones in line

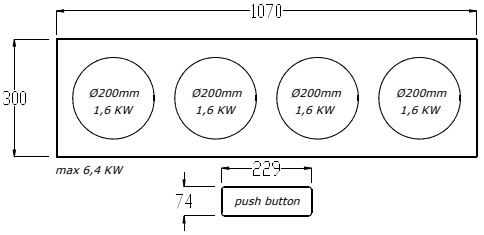

S-H7 4 zones 64x48cm

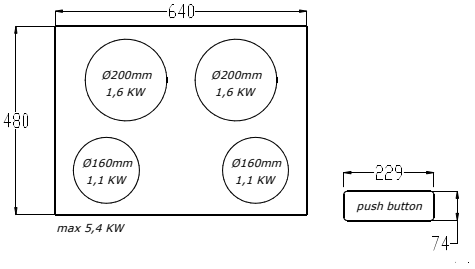

S-H7 5 zones 82x48cm

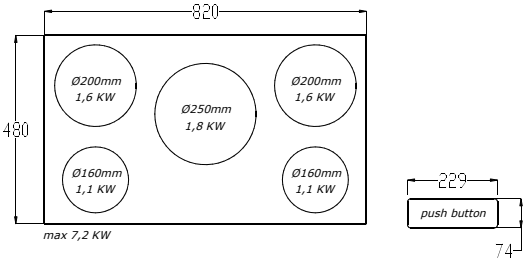

INDUCTION HOBS

SH8 cm 60



580 cm

510 cm

Ego B4 induction technology
Schott Ceran Luminoir black glass
Slider control Smart Kii (White led)
Cooking timer
Stand alone timer
Booster
Pause
Recall
automatic Pot detection
Keep warm
Child lock
Key lock
Residual heat display
Automatic heat up
Bridge
Cooking zone: 4
Octa 190 x 210 mm (2,1 / 3 kW)
Octa 190 x 210 mm (2,1 / 3 kW)
Round 200 mm (2,3 / 3 kW)
Round 160 mm (1,4 / 2,1 kW)
Max power 7400W
Powe supply:
220-240 / 380-415 ; 50-60 Hz

Hob Size (mm)
580x510
Cut out (mm)
560x490






SH8 cm 78


Ego B4 induction technology
Schott Ceran Luminoir black glass
Slider control Smart Kii (White led)
Cooking timer
Stand alone timer
Booster
Pause
Recall
automatic Pot detection
Keep warm
Child lock
Key lock
Residual heat display
Automatic heat up
Bridge
Cooking zone: 4
Octa 190 x 210 mm (2,1 / 3 kW)
Octa 190 x 210 mm (2,1 / 3 kW)
Round 250 mm (2,3 / 3 kW)
Round 200 mm (2,3 / 3 kW)
Max power 7400W
Powe supply:
220-240 / 380-415 ; 50-60 Hz

Hob Size (mm)
780x510
Cut out (mm)
750x490

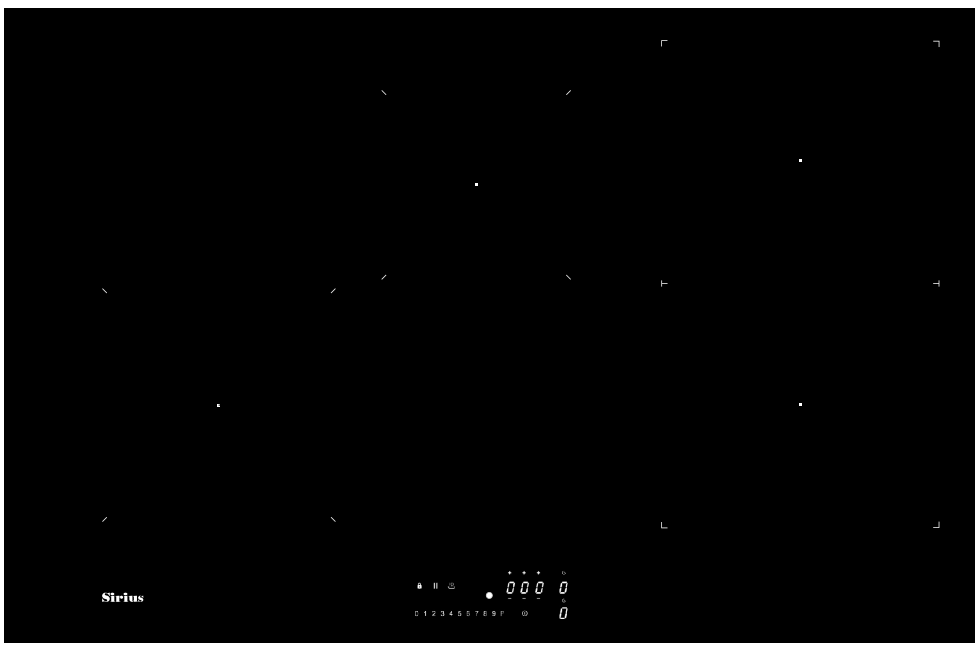

510 cm

780 cm

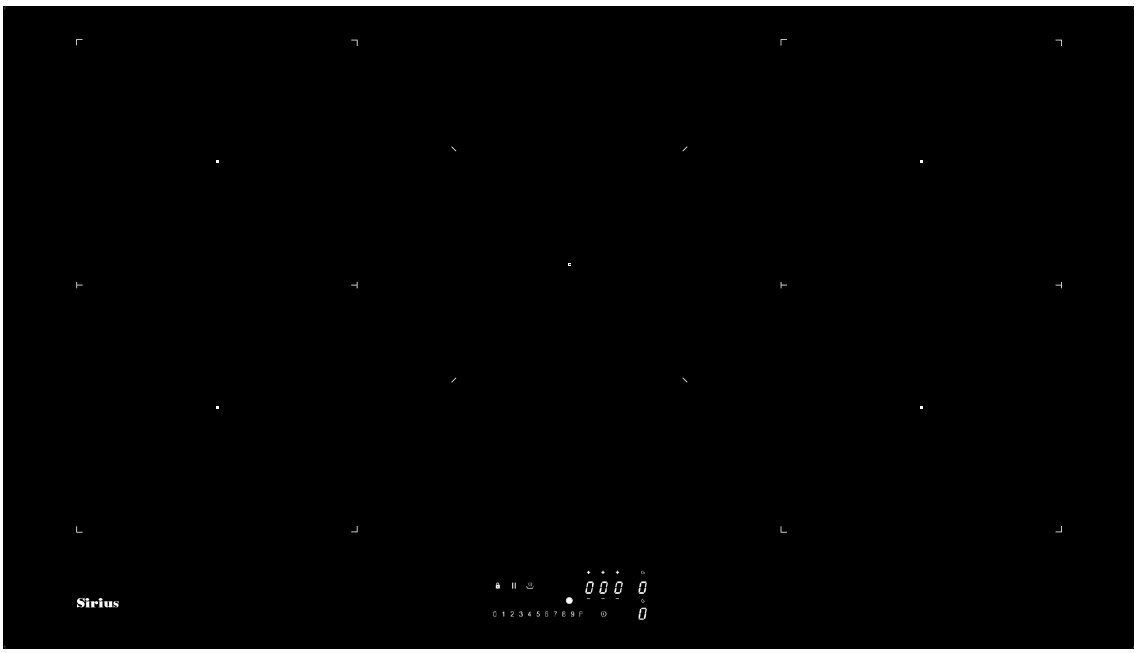

510 cm

900 cm

SH8 cm 90




S-H8 cm90


Ego B4 induction technology
Schott Ceran Luminoir black glass
Slider control Smart Kii (White led)
Cooking timer
Stand alone timer
Booster
Pause
Recall
automatic Pot detection
Keep warm
Child lock
Key lock
Residual heat display
Automatic heat up
Bridge
Cooking zone: 5
Octa 190 x 210 mm (2,1 / 3 kW)
Octa 190 x 210 mm (2,1 / 3 kW)
Round 250 mm (2,3 / 3 kW)
Octa 190 x 210 mm (2,1 / 3 kW) Bridge
Octa 190 x 210 mm (2,1 / 3 kW) Bridge
Max power 10400W
Powe supply:
220-240 / 380-415 ; 50-60 Hz


Hob Size (mm)
900x510
Cut out (mm)
860x490







S-KFHE2
HIGH EFFICIENCY
FILTERING KIT
FOR KITCHEN PLINT MIN. 100mm HEIGHT

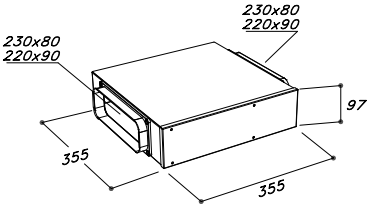




S-KFHE3
HIGH EFFICIENCY
FILTERING KIT
FOR KITCHEN PLINT MIN. 60mm HEIGHT







KF
Charcoal filters for use with df when recirculating




LBR
Stainless steel baffle filter- optional upgrade



DF
(AIR DEVIATOR FOR USE WITH KF WHEN RECIRCULATING)

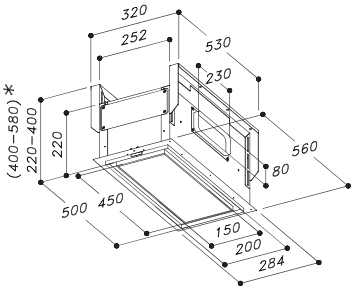

S-DF2**
AIR DEVIATOR FOR USE WITH CEILING HOODS WHEN RECIRCULATING BUILT-IN VERSION
The air deviator needs to be installed at a minimum distance of 1500mm from the extractor



ISLAND FIXING SYSTEM
PATENTED

** Optional bracket kit*
***Cut out: create a niche of 502mm x 202mm whose minimum height to be reached is 220mm.*

ENERGY LABEL DATA

DOWNDRAFT				Energy efficiency Class	Annual Energy Consumption	Fluid Dynamic Efficiency	Light Efficiency Class	Grease Filtering Efficiency Class	Weighted Sound Power Emission at maximum speed	Air Flow at intensive / boost setting	Lighting
Product name	**Dimension**	**Motor**	**Model Identifier**	EEC	AEChood	FDE	LE	GFE	dB(A)	Qmax	W
SDD2 - L EM 580 X (LED)	580	on-board	D002058PB1280116	B	50,6	A	A	E	69	636	1X6,5
SDD2 - L EM 580 X (LED)	580	SEM1	D002058PB1290116	B	49,4	B	A	E	66	595	1X6,5
SDD2 - L EM 580 X (LED)	580	SEM2	D002058PB1150116	C	87,8	C	A	E	68	577	1X6,5
SDD2 - L EM 580 X (LED)	580	SEM8	D002058PB1170116	C	105,8	C	A	E	70	622	1X6,5
SDD2 - L EM 580 X (LED)	580	SEM10	D002058PB1300116	C	57	C	A	E	67	478	1X6,5
SDD2 -L 880 (LED) X	875	on-board	D002088PB1282415	A	44,5	A	A	E	68	757	1x5
SDD2-EM-L 880 (LED) X	875	SEM1	D002088PB1292415	B	54,5	A	A	E	59	682	1x5
SDD2-EM-L 880 (LED) X	875	SEM2	D002088PB1152415	C	82,9	C	A	E	62	731	1x5
SDD2-EM-L 880 (LED) X	875	SEM7 Ø150	D002088PB1162415	A+	109,2	A	A	F	72	1142	1x5
SDD2-EM-L 880 (LED) X	875	SEM7 Ø200	D002088PB1162415	A+	112,9	A	A	F	74	1328	1x5
SDD2-EM-L 880 (LED) X	875	SEM8	D002088PB1172415	C	102,6	B	A	F	64	753	1x5
SDD2-EM-L 880 (LED) X	875	SEM10	D002088PB1302415	C	54,3	C	A	E	61	530	1x5
SDD2-EM-L 880 (LED) X	875	SEM12	D002088PB1312415	A	59	A	A	E	68	668	1x5
SDD2-L 1200 (LED) X	1175	on-board	D002118PB1282717	A	51,9	A	A	E	68	791	1X9
SDD2-L EM 1200 (LED) X	1175	SEM1	D002118PB1292717	A	49,9	A	A	E	55	736	1X9
SDD2-L EM 1200 (LED) X	1175	SEM2	D002118PB1152717	C	90,7	B	A	E	57	738	1X9
SDD2-L EM 1200 (LED) X	1175	SEM8	D002118PB1172717	B	98,5	B	A	F	60	807	1X9
SDD2-L EM 1200 (LED) X	1175	SEM10	D002118PB1302717	C	58,3	C	A	E	59	559	1X9
SDD2 - L EM 580 TC (LED)	580	on-board	D002058TC1280116	B	50,6	A	A	E	69	636	1X6,5
SDD2 - L EM 580 TC (LED)	580	SEM1	D002058TC1290116	B	49,4	B	A	E	66	595	1X6,5
SDD2 - L EM 580 TC (LED)	580	SEM2	D002058TC1150116	C	87,8	C	A	E	68	577	1X6,5
SDD2 - L EM 580 TC (LED)	580	SEM8	D002058TC1170116	C	105,8	C	A	E	70	622	1X6,5
SDD2 - L EM 580 TC (LED)	580	SEM10	D002058TC1300116	C	57	C	A	E	67	478	1X6,5
SDD2 -L 880 (LED) TC	875	on-board	D002088TC1282415	A	44,5	A	A	E	68	757	1x5
SDD2-EM-L 880 (LED) TC	875	SEM1	D002088TC1292415	B	54,5	A	A	E	59	682	1x5
SDD2-EM-L 880 (LED) TC	875	SEM2	D002088TC1152415	C	82,9	C	A	E	62	731	1x5
SDD2-EM-L 880 (LED) TC	875	SEM7 Ø150	D002088TC1162415	A+	109,2	A	A	F	72	1142	1x5
SDD2-EM-L 880 (LED) TC	875	SEM7 Ø200	D002088TC1162415	A+	112,9	A	A	F	74	1328	1x5
SDD2-EM-L 880 (LED) TC	875	SEM8	D002088TC1172415	C	102,6	B	A	F	64	753	1x5
SDD2-EM-L 880 (LED) TC	875	SEM10	D002088TC1302415	C	54,3	C	A	E	61	530	1x5
SDD2-EM-L 880 (LED) TC	875	SEM12	D002088TC1312415	A	59	A	A	E	68	668	1x5
SDD2-L 1200 (LED) TC	1175	on-board	D002118TC1282717	A	51,9	A	A	E	68	791	1X9
SDD2-L EM 1200 (LED) TC	1175	SEM1	D002118TC1292717	A	49,9	A	A	E	55	736	1X9
SDD2-L EM 1200 (LED) TC	1175	SEM2	D002118TC1152717	C	90,7	B	A	E	57	738	1X9
SDD2-L EM 1200 (LED) TC	1175	SEM8	D002118TC1172717	B	98,5	B	A	F	60	807	1X9
SDD2-L EM 1200 (LED) TC	1175	SEM10	D002118TC1302717	C	58,3	C	A	E	59	559	1X9
STONE	835	on-board	D002088PB1282415	A	44,5	A	A	E	68	757	1x5
STONE EM	835	SEM1	D002088PB1292415	B	54,5	A	A	E	59	682	1x5
STONE EM	835	SEM2	D002088PB1152415	C	82,9	C	A	E	62	731	1x5
STONE EM	835	SEM8	D002088PB1172415	C	102,6	B	A	F	64	753	1x5
STONE EM	835	SEM10	D002088PB1302415	C	54,3	C	A	E	61	530	1x5
STONE EM	835	SEM12	D002088PB1312415	A	59	A	A	E	68	668	1x5
STONE	1135	on-board	D002118PB1282717	A	51,9	A	A	E	68	791	1X9
STONE EM	1135	SEM1	D002118PB1292717	A	49,9	A	A	E	55	736	1X9
STONE EM	1135	SEM2	D002118PB1152717	C	90,7	B	A	E	57	738	1X9
STONE EM	1135	SEM8	D002118PB1172717	B	98,5	B	A	F	60	807	1X9
STONE EM	1135	SEM10	D002118PB1302717	C	58,3	C	A	E	59	559	1X9
S-DD11 X	810	on-board	D011088PB1282219	B	59,6	B	F	E	68	681	2x3,9
S-DD11 EM X	810	SEM1	D011088PB1292219	B	55,4	B	F	E	59	633	2x3,9
S-DD11 EM X	810	SEM2	D011088PB1152219	C	80,2	C	F	E	62	639	2x3,9
S-DD11 EM X	810	SEM10	D011088PB1302219	C	57,9	C	F	E	70	478	2x3,9
S-DD11 EM X	810	SEM12	D011088PB1312219	C	79,7	C	F	E	71	576	2x3,9
S-DD13	880	on-board	D013088TC1283163	A	50,8	A	C	C	68	690	1x9,5
S-DD13 EM	880	SEM1	D013088TC1293163	A	48,7	A	C	C	59	660	1x9,5
S-DD13 EM	880	SEM2	D013088TC1153163	B	75,2	B	C	C	62	665	1x9,5
S-DD13 EM	880	SEM8	D013088TC1173163	C	109,4	C	C	C	64	775	1x9,5
S-DD13 EM	880	SEM10	D013088TC1303163	C	65,7	D	C	C	61	525	1x9,5
S-DD18	880	on-board	D018088TC1282472	A	50,7	A	A	E	67	730	1x5
S-DD18 EM	880	SEM1	D018088TC1292472	A	46,8	A	A	E	61	665	1x5
S-DD18 EM	880	SEM2	D018088TC1152472	C	81,6	C	A	E	63	682	1x5
S-DD18 EM	880	SEM8	D018088TC1172472	B	93,9	B	A	F	66	787	1x5
S-DD18 EM	880	SEM10	D018088TC1302472	B	51,7	C	A	E	65	575	1x5
S-DD18 EM	880	SEM12	D018088TC1312472	A	58,7	A	A	E	73	715	1x5
S-DD20 INOX BRHM	520	on-board	D020052TC135XX74	A++	31,5	A	n/a	C	66	680	n/a
S-DD20 GLASS BRHM	520	on-board	D020052TC135XX74	A++	31,5	A	n/a	C	66	680	n/a

CEILING

Product name	Dimension	Motor	Model Identifier	Energy efficiency Class	Annual Energy Consumption	Fluid Dynamic Efficiency	Light Efficiency Class	Grease Filtering Efficiency Class	Weighted Sound Power Emission at maximum speed	Air Flow at intensive / boost setting	Lighting
				EEC	AEChood	FDE	LE	GFE	dB(A)	Qmax	W
SLT958 h200	440x900	on-board	C958090RC1244073	B	54,9	C	B	F	63	600	2x3,75
SLT958 h200 BRHM	440x900	on-board	C958090RC1374073	A++	26	A	B	B	71	720	2x3,75
SLT958 EM	440x900	SEM1	C958090RC1294037	B	59,1	B	B	F	55	670	2x3,75
SLT958 EM	440x900	SEM2	C958090RC1154037	B	69,4	A	B	F	59	790	2x3,75
SLT970	600x1000	on-board	C970100RC1243637	B	53,7	C	B	F	63	600	3x2,5
SLT970 BRHM	600x1000	on-board	C970100RC1373637	A++	26	A	B	B	71	720	3x2,5
SLT970 EM	600x1000	SEM1	C970100RC1293643	B	54,8	A	B	F	61	665	3x2,5
SLT970 EM	600x1000	SEM2	C970100RC1153643	C	84	C	B	F	65	693	3x2,5
SLT971	550x900	on-board	C971090RC1244143	B	52,6	C	A	F	63	600	1X6
SLT971 BRHM	550x900	on-board	C971090RC1374143	A++	24,9	A	A	B	71	720	1X6
SLT971 EM	550x900	SEM1	C971090RC1294143	B	53,7	A	A	F	61	665	1X6
SLT971 EM	550x900	SEM2	C971090RC1154143	C	82,9	C	A	F	65	693	1X6
SLT971	650x1200	on-board	C971120RC1244037	B	53,7	C	B	F	64	610	2x3,75
SLT971 BRHM	650x1200	on-board	C971120RC1374037	A++	26	A	B	B	71	720	2x3,75
SLT971 EM	650x1200	SEM1	C971120RC1294037	B	54,8	A	B	F	61	675	2x3,75
SLT971 EM	650x1200	SEM2	C971120RC1154037	C	84	C	B	F	65	703	2x3,75
SLT 973 4V APP		on-board	C973075RA1245333	B	53	B	E	F	62	540	1X10,5
SLT 973 BRHM APP		on-board	C973075RA1375333	A+	30,1	A	E	B	67	700	1X10,5
SLT 973 EM APP		SEM1	C973075RA1295333	A	51,7	A	E	F	69	652	1X10,5
SLT 973 EM APP		SEM2	C973075RA1155333	C	92,1	C	E	F	70	630	1X10,5
SLT 973 4V LIGHT APP		on-board	C973075RA1245333	B	53	B	E	F	62	540	1X10,5
SLT 973 BRHM LIGHT APP		on-board	C973075RA1375333	A+	30,1	A	E	B	67	700	1X10,5
SLT 973 EM LIGHT APP		SEM1	C973075RA1295333	A	51,7	A	E	F	69	652	1X10,5
SLT 973 EM LIGHT APP		SEM2	C973075RA1155333	C	92,1	C	E	F	70	630	1X10,5
SLT 974 4V APP	550x850	on-board	C974085RC1243773	B	49,3	B	A	F	65	593	1X7
SLT 974 BRHM APP	550x850	on-board	C974085RA1373773	A++	25,6	A	A	B	71	720	1X7
SLT 974 EM APP	550x850	SEM1	C974085RA1293773	A	48,7	A	A	F	61	665	1X7
SLT 974 EM APP	550x850	SEM2	C974085RC1153773	B	75,4	B	A	F	60	643	1X7
SLT 976 E.LA. 4V APP	440x930	on-board	C976093RA1244681	B	51,9	B	A	E	64	580	2x1,4
SLT 976 E.LA. BRHM APP	440x930	on-board	C976093RA1374681	A++	29,1	A	A	B	66	735	2x1,4
SLT 976 E.LA. EM APP	440x930	SEM1	C976093RA1294681	A	47,8	A	A	E	68	685	2x1,4
SLT 976 E.LA. EM APP	440x930	SEM2	C976093RA1154681	B	79,4	C	A	E	70	700	2x1,4
SLT 976 E.LA. 4V Auto	440x930	on-board	C976093RA1244681	B	51,9	B	A	E	64	580	2x1,4
SLT 976 E.LA. BRHM Auto	440x930	on-board	C976093RA1374681	A++	29,1	A	A	B	66	735	2x1,4
SLT 976 E.LA. EM Auto	440x930	SEM1	C976093RA1294681	A	47,8	A	A	E	68	685	2x1,4
SLT 976 E.LA. EM Auto	440x930	SEM2	C976093RA1154681	B	79,4	C	A	E	70	700	2x1,4
SLT 977 4V APP	440x930	on-board	C977093RA1245481	B	51,9	B	A	E	64	580	1X3
SLT 977 BRHM APP	440x930	on-board	C977093RA1375481	A++	29,1	A	A	B	66	735	1X3
SLT 977 EM APP	440x930	SEM1	C977093RA1295481	A	47,8	A	A	E	68	685	1X3
SLT 977 EM APP	440x930	SEM2	C977093RA1155481	B	79,4	C	A	E	70	700	1X3
SLT 978 4V APP	440x930	on-board	C978093RA1245281	B	57,3	B	D	E	64	580	1x10,5
SLT 978 BRHM APP	440x930	on-board	C978093RA1375281	A+	34,6	A	D	B	66	735	1x10,5
SLT 978 EM APP	440x930	SEM1	C978093RA1295281	A	53,3	A	D	E	68	685	1x10,5
SLT 978 EM APP	440x930	SEM2	C978093RA1155281	C	84,8	C	D	E	70	700	1x10,5
SLT 978 LIGHT 4V APP	440x930	on-board	C978093RA1245281	B	57,3	B	D	E	64	580	1x10,5
SLT 978 LIGHT BRHM APP	440x930	on-board	C978093RA1375281	A+	34,6	A	D	B	66	735	1x10,5
SLT 978 LIGHT EM APP	440x930	SEM1	C978093RA1295281	A	53,3	A	D	E	68	685	1x10,5
SLT 978 LIGHT EM APP	440x930	SEM2	C978093RA1155281	C	84,8	C	D	E	70	700	1x10,5
SLT 979 E.LA. 4V APP	680x1080	on-board	C979108RA1244860	B	52,6	B	B	E	63	600	2X5
SLT 979 E.LA. BRHM APP	680x1080	on-board	C979108RA1374860	A+	35,5	A	B	B	71	735	2X5
SLT 979 E.LA. EM APP	680x1080	SEM1	C979108RA1294860	A	56,2	A	B	E	65	695	2X5
SLT 979 E.LA. EM APP	680x1080	SEM2	C979108RA1154860	B	79,6	B	B	E	71	754	2X5
SLT 980 E.LA. BRHM	520x900	on-board	C980090RC1375181	A+	34,8	A	D	B	66	745	1x10,5
SLT 980 E.LA. EM	520x900	SEM1	C980093RC1295181	A	53,3	A	D	E	68	685	1x10,5
SLT 980 E.LA. EM	520x900	SEM2	C980093RC1155181	C	84,8	C	D	E	70	700	1x10,5

DECORATIVE ISLANDS

Product name	Dimension	Motor	Model Identifier	Energy efficiency Class	Annual Energy Consumption	Fluid Dynamic Efficiency	Light Efficiency Class	Grease Filtering Efficiency Class	Weighted Sound Power Emission at maximum speed	Air Flow at intensive / boost setting	Lighting
				EEC	AEChood	FDE	LE	GFE	dB(A)	Qmax	W
SIL24 X	900	on-board	I024090PB1284437	A	45,3	A	B	A	70	730	2x3,75
SIL24 X	1200	on-board	I024120PB1284437	A	45,3	A	B	A	70	730	2x3,75
SIL24 TC	900	on-board	I024090TC1284437	A	45,3	A	B	A	70	730	2x3,75
SILTC36	1200	on-board	I036120TA1284143	A	48,2	A	B	A	71	700	2x6
MO407		on-board	I407037RC1283685	A	48,3	A	A	A	71	650	2x2,5
MO408		on-board	I408040RC1283685	A	48,3	A	A	A	71	650	2x2,5
MO409W		on-board	I409090TA1104443	A	48,3	A	A	C	67	640	2x3,75
MO409W		on-board	I409090TB1104443	A	51,1	A	A	A	67	640	3x3,75

WALL HOODS

Product name	Dimension (mm)	Motor	Model Identifier	Energy efficiency Class	Annual Energy Consumption	Fluid Dynamic Efficiency	Light Efficiency Class	Grease Filtering Efficiency Class	Weighted Sound Power Emission at maximum speed	Air Flow at intensive / boost setting	Lighting
				EEC	AEChood	FDE	LE	GFE	dB(A)	Qmax	W
SLTC 90	550	on-board	P090055SL1020113	A	46,0	A	B	C	69	748	1x6,5
SLTC 91	800	on-board	P091080SL1020122	A	47,1	A	B	D	69	750	1x6,5
SLTC 92	900	on-board	P092090TC1284037	A	45,3	A	B	A	72	730	2x3,75
SL 92	600	on-board	P092060PB1284037	A	45,3	A	B	A	72	730	2x3,75
SL 92	900	on-board	P092090PB1284037	A	45,3	A	B	A	72	730	2x3,75
SLTC 93	600	on-board	P093060TC1284022	A	44,1	A	A	C	65	748	1x3,75
SLTC 93	800	on-board	P093080TC1284022	A	45,1	A	A	C	69	750	1x3,75
SLTC 97	600	on-board	P097060TC1284075	A	44,8	A	A	A	69	720	1x3,75
SLTC 97	900	on-board	P097090TC1284002	A+	41,9	A	B	A	72	773	2x3,75
SL 107	900	on-board	P107090PB1280144	A+	39,5	A	B	A	67	782	2x3,75
SLTC 107	900	on-board	P107090TC1284044	A+	39,5	A	B	A	67	782	2x3,75
SL 109	900	on-board	P109090PB1034044	A	52,2	A	A	A	63	750	2x3,75
SL 109	1200	2 Mot on-board	P109120PB2034045	B	119,8	B	A	A	75	1453	2x3,75
SLTC 111	800	on-board	P111080TC1364422	A	48,0	A	A	C	64	610	1x3,75
SLTC 111 anti-drop	800	on-board	P111080TA1364422	A	48,0	A	A	C	64	610	1x3,75
SLTC 116	600	on-board	P116060PB1364422	A	48,0	A	A	C	64	610	1x3,75
SLTC 119	800	on-board	P119080TC1284022	A	45,1	A	A	C	69	750	1x3,75
SLTC 120	900	on-board	P120090TV1284404	A+	38,8	A	A	C	68	765	1x3,75
SLTC 122	600	on-board	P122060TA1284485	A+	38,7	A	A	C	67	720	1x3,75
SLTC 122	900	on-board	P122090TA1284437	A+	41,4	A	A	C	67	720	2x3,75
MO209		on-board	P209037RC1283685	A	48,3	A	A	A	71	650	2x2,5
MO210		on-board	P210040RC1283685	A	48,3	A	A	A	71	650	2x2,5

BUILT-IN PRODUCTS

Product name	Dimension	Motor	Model Identifier	Energy efficiency Class	Annual Energy Consumption	Fluid Dynamic Efficiency	Light Efficiency Class	Grease Filtering Efficiency Class	Weighted Sound Power Emission at maximum speed	Air Flow at intensive / boost setting	Lighting
				EEC	AEChood	FDE	LE	GFE	dB(A)	Qmax	W
SM 900	520	on-board	G900052PB1010657	B	58,1	B	A	B	70	604	2x2,1
SM 900	700	on-board	G900070PB1010657	B	54,9	B	A	B	70	654	2x2,1
SL 900	520	on-board	G900052PB1280657	A	46,6	A	A	B	70	762	2x2,1
SL 900	700	on-board	G900070PB1280657	A	46,9	A	A	B	70	773	2x2,1
SL 903-P	700	on-board	G903070PB1280541	A	55,2	A	A	B	69	700	4x2,1
SL 903-P-EM	700	SEM1	G903070PB1290541	B	58,1	B	A	B	65	630	4x2,1
SL 903-P-EM	700	SEM2	G903070PB1150541	C	80,2	C	A	B	66	630	4x2,1
SL 903-P	900	on-board	G903090PB1280541	A	50,9	A	A	B	69	705	4x2,1
SL 903-P-EM	900	SEM1	G903090PB1290541	B	58,5	B	A	B	65	624	4x2,1
SL 903-P-EM	900	SEM2	G903090PB1150541	C	81,1	C	A	B	66	632	4x2,1
SL 906	520	on-board	G906052PB1284052	A	44,5	A	A	A	71	680	1X3,75
SL 906	850	on-board	G906085PB1284153	A	45,7	A	A	A	71	743	1x6
SL906	1000	on-board	G906100PB1282749	A	46,8	A	A	A	71	743	2X3,75
SL 907	520	on-board	G907052PB1285559	A	46,5	A	B	B	69	682	1x4
SL 907	700	on-board	G907070PB1285646	A	54,0	A	B	B	69	715	1x11
SL 909	856	on-board	G909086PB1284148	A	44,6	A	A	A	71	757	1X6
SL 909	1400	on-board	G909140PB1284048	A+	43,0	A	A	A	71	768	2X3,75
SL 913	520	on-board	G913052PB1284427	A	56,8	A	A	B	69	668	1X3,75
SL 913	780	on-board	G913078PB1284527	A	48,9	A	A	B	69	721	1x6
SLTC 919	520	on-board	G919T52TC1284466	A	45,8	A	A	A	71	715	1X3,75
SLTC 919	850	on-board	G919T85TC1284567	A	48,5	A	B	A	71	730	1x6
SM 923 -L	520	on-board	G923052PB1013580	A	49,4	A	A	B	70	610	1x6,5
SM 923 -L	850	on-board	G923085PB1013382	A	52,8	A	A	B	70	640	1x10,5
SM 927	520	on-board	G927052PB1013527	B	50,5	B	A	B	70	590	1X6,5
SM 927	850	on-board	G927085PB1013378	B	53,9	B	B	B	70	619	1X10,5
SL 927 anti-drop	520	on-board	G927052PB1014427	B	48,5	B	A	B	70	590	1X3,75
SL 927 anti-drop	850	on-board	G927085PB1014578	A	50,7	A	A	B	70	653	1x6
SLTC 928	600	on-board	G928060TC1014066	A	44,0	A	A	B	70	580	1x3,75
SLTC 928	900	on-board	G928090TC1014084	A	40,4	A	A	B	70	660	1X6
SLTC 928	1200	on-board	G928120TC1014166	A	42,0	A	A	B	70	660	2X3,75
SLTC 930	850	on-board	G930085RA1284087	A	43,6	A	A	B	69	695	2X3,75

VENTED INDUCTION HOBS

Product name	Dimension	Motor	Model Identifier	Energy efficiency Class	Annual Energy Consumption	Fluid Dynamic Efficiency	Light Efficiency Class	Grease Filtering Efficiency Class	Weighted Sound Power Emission at maximum speed	Air Flow at intensive / boost setting	Lighting
				EEC	AEChood	FDE	LE	GFE	dB(A)	Qmax	W
S-DDH1	900X510	on-board	D009088TC1282415	A	44,5	A	A	E	68	757	1X5
S-DDH1	900X510	SEM1	D009088TC1292415	B	54,5	A	A	E	59	682	1X5
S-DDH1	900X510	SEM2	D009088TC1152415	C	82,9	C	A	E	62	731	1X5
S-DDH1	900X510	SEM8	D009088TC1172415	C	102,6	B	A	F	64	753	1X5
S-DDH1	900X510	SEM10	D009088TC1302415	C	54,3	C	A	E	61	530	1X5
S-DDH1	900X510	SEM12	D009088TC1312415	A	59	A	A	E	68	668	1X5
S-DDH5 BRHM	900x520	on-board	D005090TC135XXXX	A+	43,3	A	n/a	C	63	645	n/a
S-DDH6 BRHM	780x520	on-board	D006078TC135XX79	A+	43,3	A	n/a	C	63	645	n/a
S-DDH6	600x520	on-board	D006060TC142XX89	B	49,9	B	n/a	C	63	540	n/a
S-DDH9	900x520	on-board	D009090TC141XX88	A+++	32	A	n/a	C	66	760	n/a

art direction
Giacomo Fava

The printing process do not always permit
a faithful reproduction of tones
and materials of originals.

Sirius S.p.A. reserves the right to change,
at any time and without prior warning,
the technical specifications of any product
illustrated in this catalogue.

This catalogue is of exclusive propriety
of Sirius spa. All rights are reserved.
Any form of total or partial reproduction
of catalogue is strictly forbidden.

Security and respect of the general requirements of Directives are the basis for the realization of our products. It is a question of quality and security, well spread in our company. Together with the protection of environment, and the health of our employees. Working with us with passion, being respectful and taking care of our company is like living at home.

SIRIUS S.p.a.
Zona Ind.le Berbentina 6/A
60041 Sassoferrato (An)
Tel. +39 0732.97171
Fax. +39 0732.95493

www.siriuscappe.com

APRIL 2024

www.siriuscappe.com